




# OIL ANALYSIS REPORT

Sample Rating Trend

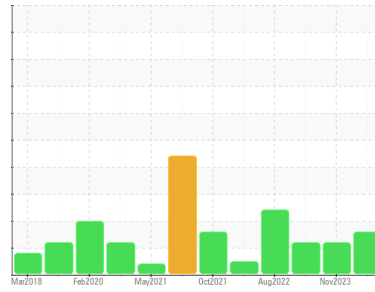

ISO



Machine Id  
**KAESER SM 10 5399168 (S/N 1752)**  
 Component  
**Compressor**  
 Fluid  
**KAESER SIGMA (OEM) S-460 (--- QTS)**

## DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>KC128672</b>	KC124778	KC109304
Sample Date	Client Info	<b>14 Jun 2024</b>	10 Nov 2023	02 May 2023
Machine Age	hrs	<b>26749</b>	24272	21969
Oil Age	hrs	<b>1476</b>	0	644
Oil Changed	Client Info	<b>Changed</b>	N/A	Changed
Sample Status		<b>ABNORMAL</b>	ATTENTION	ATTENTION

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >50	<b>1</b>	0	0
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m >3	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >3	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >10	<b>2</b>	0	0
Lead	ppm	ASTM D5185m >10	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >50	<b>5</b>	4	5
Tin	ppm	ASTM D5185m >10	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	<b>0</b>	0	0
Barium	ppm	ASTM D5185m 90	<b>3</b>	0	37
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m 90	<b>41</b>	33	69
Calcium	ppm	ASTM D5185m 2	<b>0</b>	0	2
Phosphorus	ppm	ASTM D5185m	<b>&lt;1</b>	0	3
Zinc	ppm	ASTM D5185m	<b>19</b>	5	12

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	<b>7</b>	6	2
Sodium	ppm	ASTM D5185m	<b>8</b>	18	14
Potassium	ppm	ASTM D5185m >20	<b>6</b>	1	4
Water	%	ASTM D6304 >0.05	<b>0.021</b>	0.012	0.012
ppm Water	ppm	ASTM D6304 >500	<b>217</b>	125.8	121.2






## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	<b>29926</b>	3821	4334
Particles >6µm	ASTM D7647 >1300	<b>▲ 11801</b>	1226	● 1447
Particles >14µm	ASTM D7647 >80	<b>▲ 927</b>	● 132	● 82
Particles >21µm	ASTM D7647 >20	<b>▲ 150</b>	● 44	13
Particles >38µm	ASTM D7647 >4	<b>1</b>	2	1
Particles >71µm	ASTM D7647 >3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c) >--/17/13	<b>▲ 22/21/17</b>	● 19/17/14	● 19/18/14

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 0.4	<b>0.35</b>	0.28	0.32


# OIL ANALYSIS REPORT

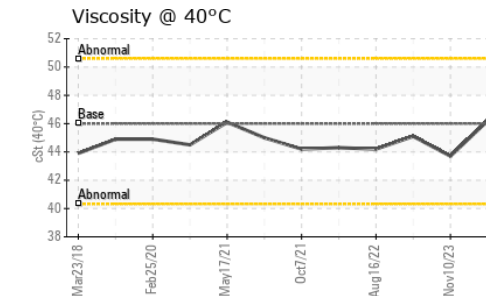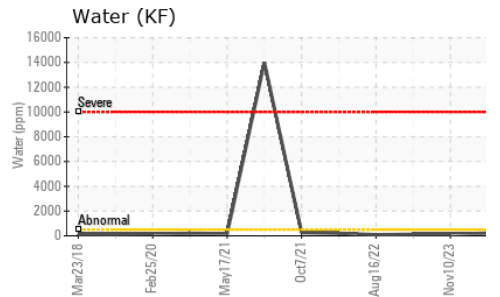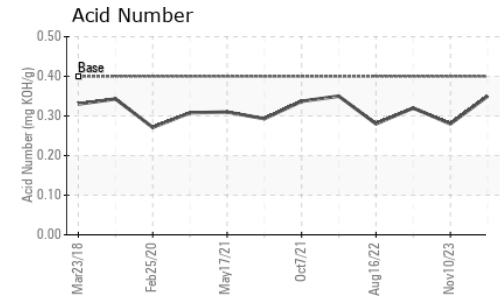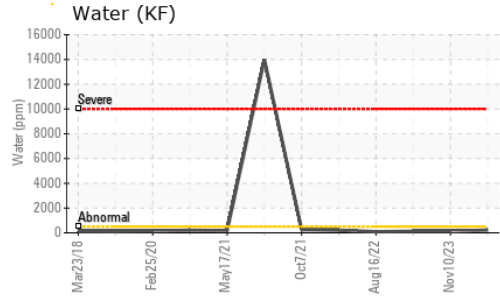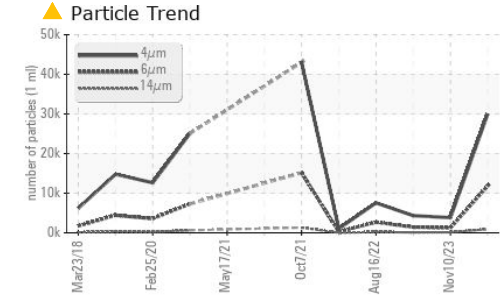






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	46.2	43.7	45.1

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

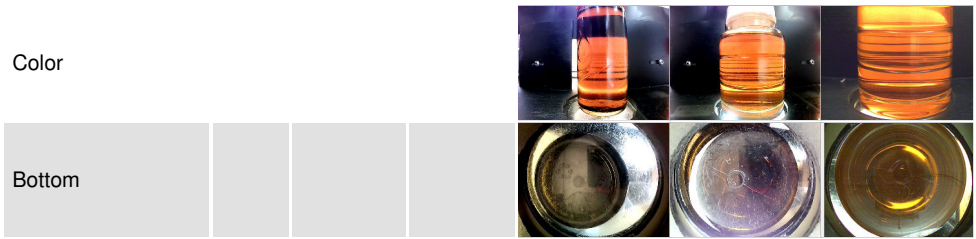

## GRAPHS

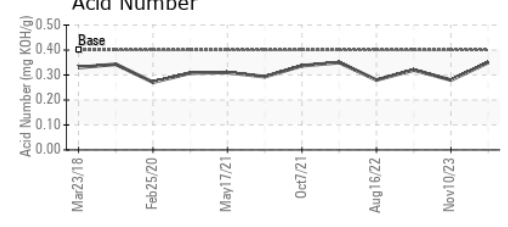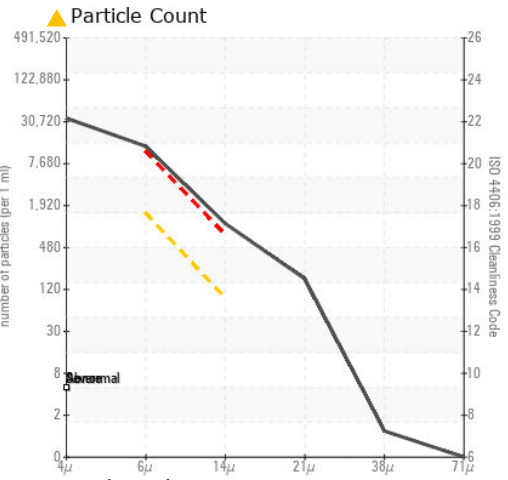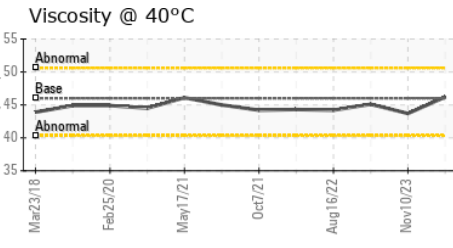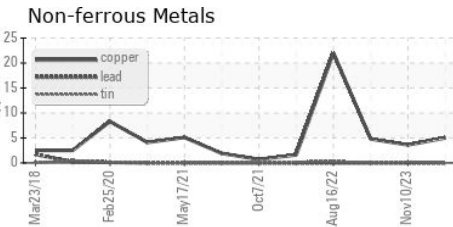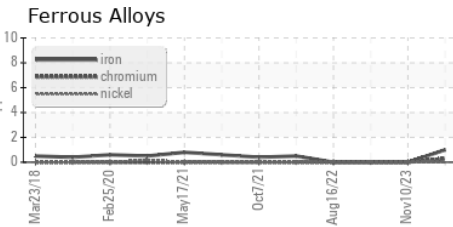

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC128672  
**Lab Number** : 06214681  
**Unique Number** : 11087545  
**Test Package** : IND 2  
**Received** : 19 Jun 2024  
**Tested** : 20 Jun 2024  
**Diagnosed** : 21 Jun 2024 - Don Baldrige

**FEDEX**  
 2050 E AURORA RD  
 TWINSBURG, OH  
 US 44087  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)