




OIL ANALYSIS REPORT

Area
METRO
 Machine Id
METRO 21038
 Component
Rear Differential
 Fluid
 {not provided} (--- GAL)

Sample Rating Trend

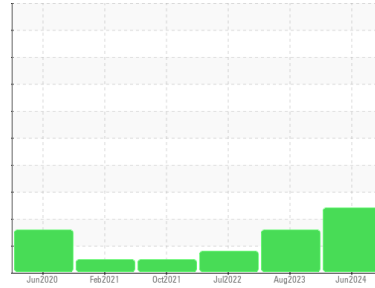

DIAGNOSIS

Recommendation
 No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is a high amount of silt (particulates < 6 microns in size) present in the oil. Elemental level of silicon (Si) above normal.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0934590	WC0843202	WC0728441
Sample Date	Client Info			11 Jun 2024	14 Aug 2023	20 Jul 2022
Machine Age	mls Client Info			421962	356836	251424
Oil Age	mls Client Info			0	0	0
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	357	▲ 838	235
Chromium	ppm	ASTM D5185m	>10	2	6	1
Nickel	ppm	ASTM D5185m	>10	2	6	1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	4	6	2
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>100	2	2	1
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m	>5	---	---	---
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		83	102	96
Barium	ppm	ASTM D5185m		3	28	0
Molybdenum	ppm	ASTM D5185m		<1	2	<1
Manganese	ppm	ASTM D5185m		4	16	3
Magnesium	ppm	ASTM D5185m		143	164	143
Calcium	ppm	ASTM D5185m		<1	4	6
Phosphorus	ppm	ASTM D5185m		1569	1709	1594
Zinc	ppm	ASTM D5185m		16	43	7
Sulfur	ppm	ASTM D5185m		21629	25056	25056






CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	▲ 78	59	44
Sodium	ppm	ASTM D5185m		9	16	8
Potassium	ppm	ASTM D5185m	>20	4	4	2
Water	%	ASTM D6304	>.2	0.031	0.054	0.052
ppm Water	ppm	ASTM D6304	>2000	311	541.2	525.9

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	▲ 52424	● 39879	▲ 85433
Particles >6µm		ASTM D7647	>5000	2281	2706	4113
Particles >14µm		ASTM D7647	>640	43	127	44
Particles >21µm		ASTM D7647	>160	10	33	13
Particles >38µm		ASTM D7647	>40	1	2	1
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>21/19/16	▲ 23/18/13	● 22/19/14	▲ 24/19/13

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		1.47	1.48	1.23




OIL ANALYSIS REPORT

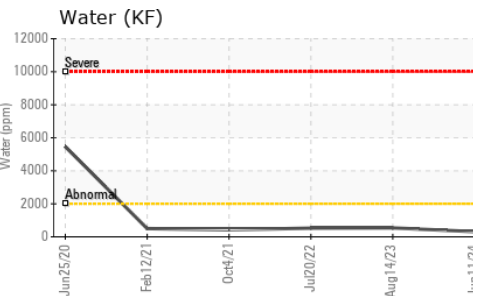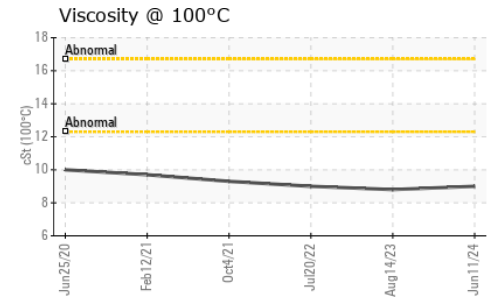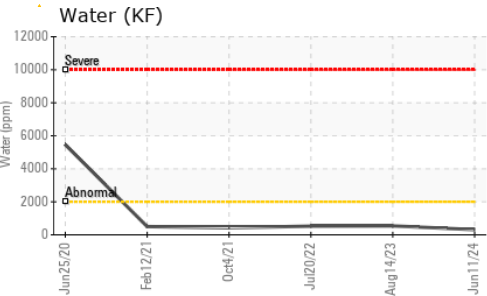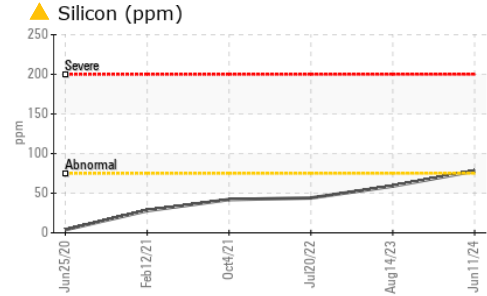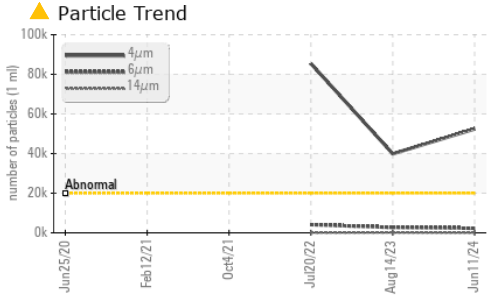






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	49.3	47.6	48.7
Visc @ 100°C	cSt	ASTM D445	9.0	8.8	9
Viscosity Index (VI)	Scale	ASTM D2270	165	166	168

SAMPLE IMAGES

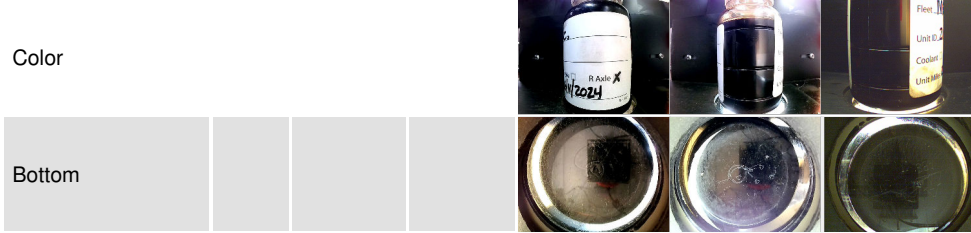

GRAPHS

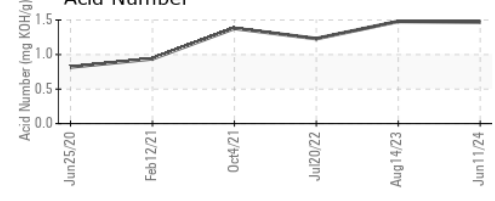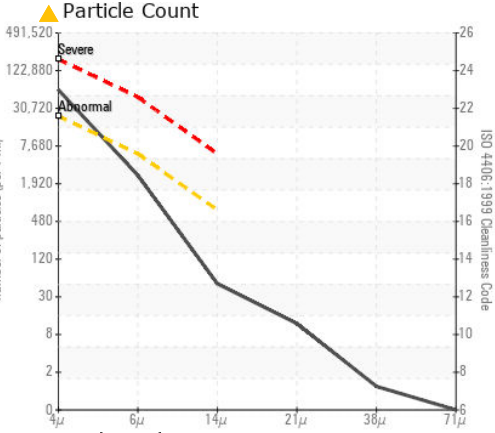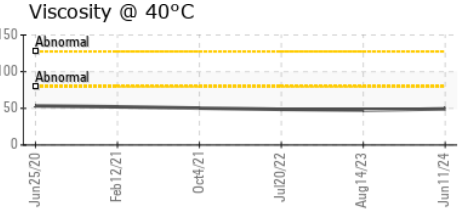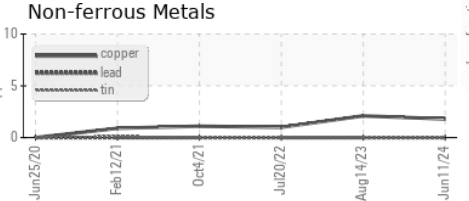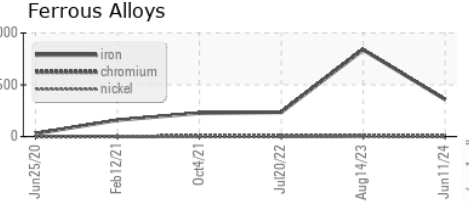

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0934590 **Received** : 19 Jun 2024
Lab Number : 06214689 **Tested** : 20 Jun 2024
Unique Number : 11087553 **Diagnosed** : 24 Jun 2024 - Doug Bogart
Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: ARJUN GOYAL
 ARJUN.GOYAL@BASF.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)