


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

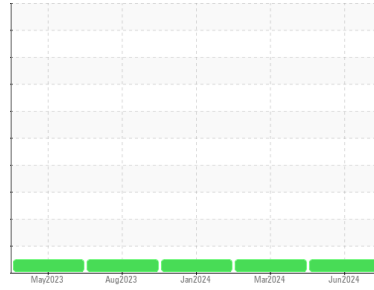

Machine Id  
**TOWER 6P (S/N 40724-01)**  
 Component  
**Right Gearbox**  
 Fluid  
**SHELL MORLINA S4 B 220 (7 GAL)**

**DIAGNOSIS**

- Recommendation**  
Resample at the next service interval to monitor.
- Wear**  
All component wear rates are normal.
- Contamination**  
There is no indication of any contamination in the oil.
- Fluid Condition**  
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

**SAMPLE INFORMATION** method limit/base current history1 history2

Sample Number	Client Info	<b>TO60002789</b>	TO60002414	TO60001382
Sample Date	Client Info	<b>18 Jun 2024</b>	25 Mar 2024	04 Jan 2024
Machine Age	hrs	Client Info	<b>0</b>	0
Oil Age	hrs	Client Info	<b>0</b>	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

**CONTAMINATION** method limit/base current history1 history2

Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
-------	-----------	------	------------	-----	-----

**WEAR METALS** method limit/base current history1 history2

PQ	ASTM D8184		<b>23</b>	12	16
Iron	ppm	ASTM D5185m	>200	<b>0</b>	0
Chromium	ppm	ASTM D5185m	>15	<b>0</b>	0
Nickel	ppm	ASTM D5185m	>15	<b>0</b>	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0
Silver	ppm	ASTM D5185m		<b>0</b>	0
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	0
Lead	ppm	ASTM D5185m	>100	<b>0</b>	0
Copper	ppm	ASTM D5185m	>200	<b>0</b>	0
Tin	ppm	ASTM D5185m	>25	<b>0</b>	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0

**ADDITIVES** method limit/base current history1 history2

Boron	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m		<b>0</b>	0	0
Calcium	ppm	ASTM D5185m		<b>0</b>	0	0
Phosphorus	ppm	ASTM D5185m		<b>301</b>	304	301
Zinc	ppm	ASTM D5185m		<b>0</b>	0	0
Sulfur	ppm	ASTM D5185m		<b>776</b>	716	634





**CONTAMINANTS** method limit/base current history1 history2

Silicon	ppm	ASTM D5185m	>50	<b>7</b>	6	7
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	0

**FLUID DEGRADATION** method limit/base current history1 history2

Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.87</b>	---	---
------------------	----------	------------	--	-------------	-----	-----


# OIL ANALYSIS REPORT

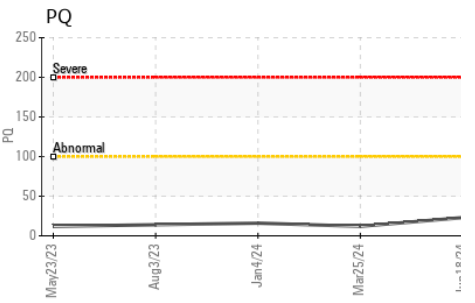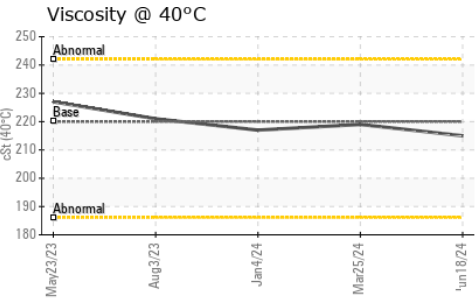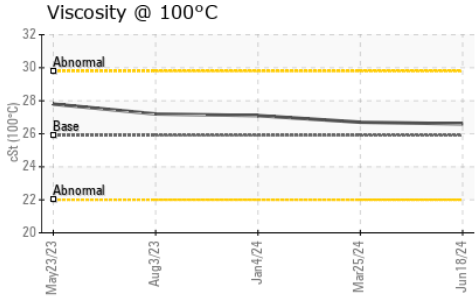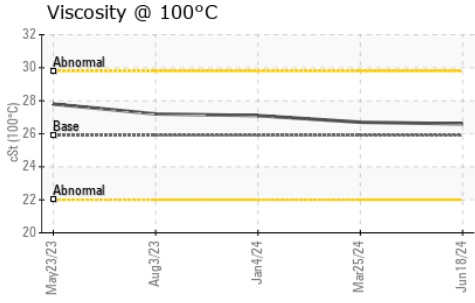







VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	220	215	219
Visc @ 100°C	cSt	ASTM D445	25.9	26.6	27.1
Viscosity Index (VI)	Scale	ASTM D2270	149	157	156

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

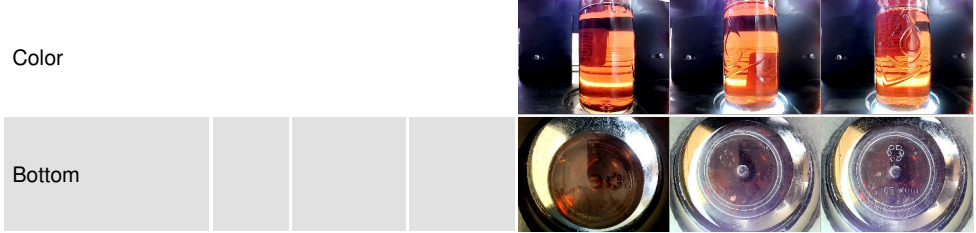

## GRAPHS

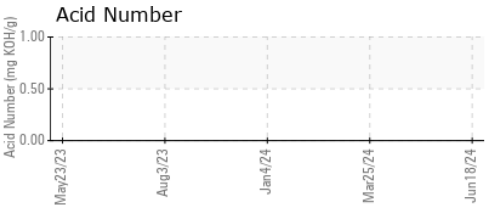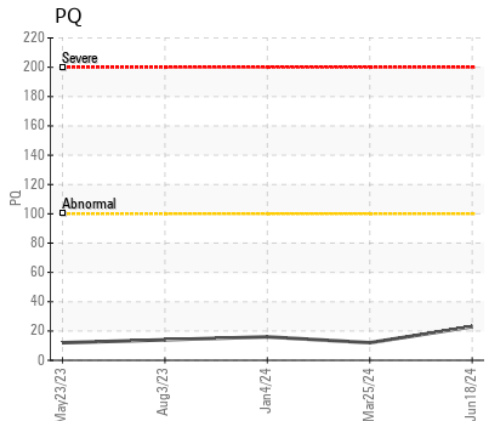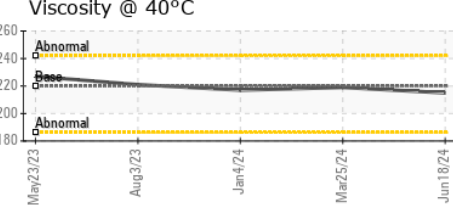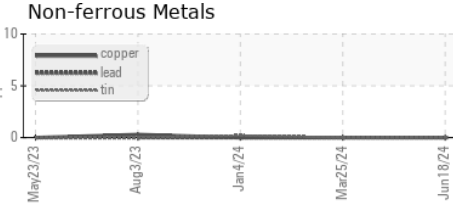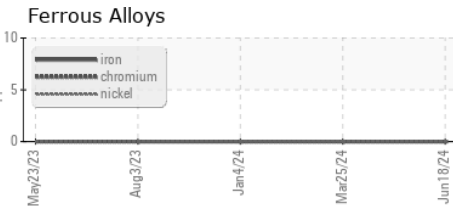

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TO60002789 **Received** : 19 Jun 2024  
**Lab Number** : 06214722 **Tested** : 20 Jun 2024  
**Unique Number** : 11087586 **Diagnosed** : 20 Jun 2024 - Wes Davis  
**Test Package** : IND 2 ( Additional Tests: KV100, PQ, VI )

**GLAD MANUFACTURING**  
 1700 N 13TH ST  
 ROGERS, AR  
 US 72756  
 Contact: CLAY OSTERHOUT  
 clay.osterhout@clorox.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)