




OIL ANALYSIS REPORT



Machine Id
MTNM01BE
 Component
Biogas Engine
 Fluid
SHELL MYSELLA S5 N 40 (160 GAL)

Sample Rating Trend

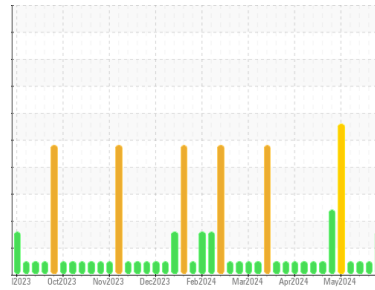

DIAGNOSIS

Recommendation
 No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 Elemental level of silicon (Si) above normal.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0775201	WC0775202	WC0775194
Sample Date	Client Info		17 Jun 2024	13 Jun 2024	28 May 2024
Machine Age	hrs	Client Info	43228	43136	43106
Oil Age	hrs	Client Info	443	351	391
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	<1.0
Water	WC Method		NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184		18	17	---
Iron	ppm	ASTM D5185m >14	5	4	4
Chromium	ppm	ASTM D5185m >3	0	0	0
Nickel	ppm	ASTM D5185m	0	0	0
Titanium	ppm	ASTM D5185m	<1	<1	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >5	3	3	3
Lead	ppm	ASTM D5185m >8	0	0	0
Copper	ppm	ASTM D5185m >5	2	1	1
Tin	ppm	ASTM D5185m >3	1	0	4
Vanadium	ppm	ASTM D5185m	<1	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	6	6	2
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	2	2	1
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m	25	22	17
Calcium	ppm	ASTM D5185m	1889	1743	1795
Phosphorus	ppm	ASTM D5185m 300	374	340	392
Zinc	ppm	ASTM D5185m	469	430	476
Sulfur	ppm	ASTM D5185m	3859	3579	4065

CONTAMINANTS






	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >180	▲ 185	130	173
Sodium	ppm	ASTM D5185m >20	3	3	1
Potassium	ppm	ASTM D5185m >20	<1	1	0

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >16	5.3	4.5	5.1
Sulfation	Abs/.1mm	*ASTM D7415	23.6	20.4	23.2



OIL ANALYSIS REPORT




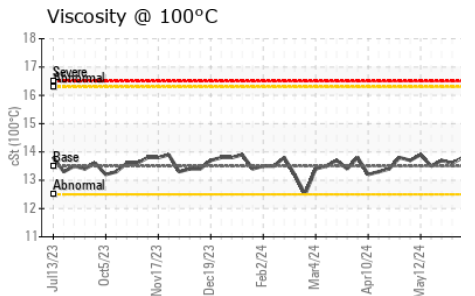
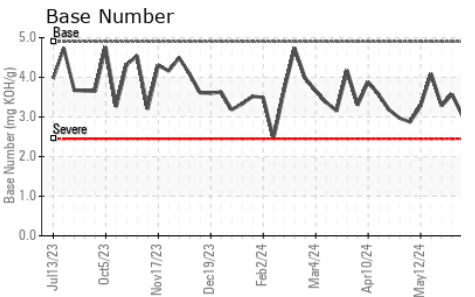
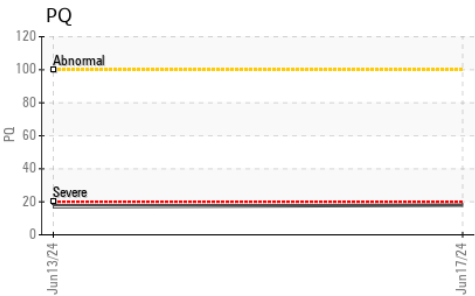
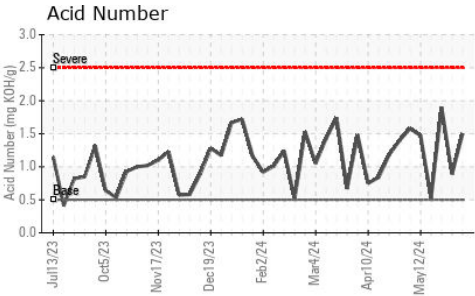
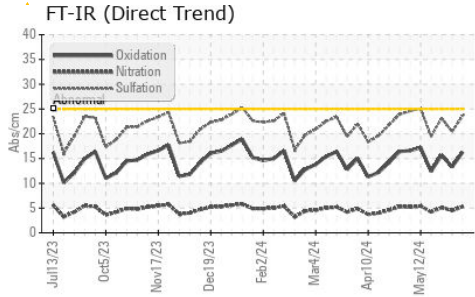


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	*ASTM D7414		16.3	13.3	15.7
Acid Number (AN)	mg KOH/g	ASTM D8045	0.5	1.50	0.89	1.90
Base Number (BN)	mg KOH/g	ASTM D2896	4.9	3.02	3.57	3.28

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual		NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.5	13.8	13.6	13.7

GRAPHS

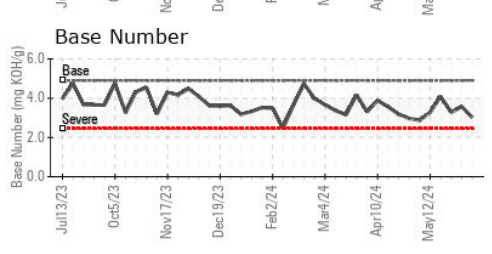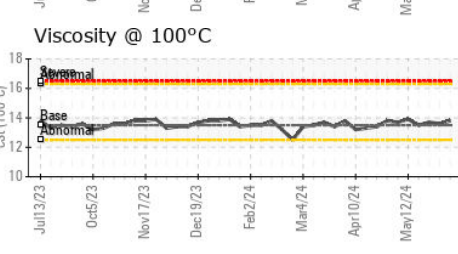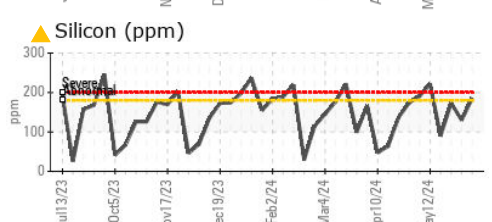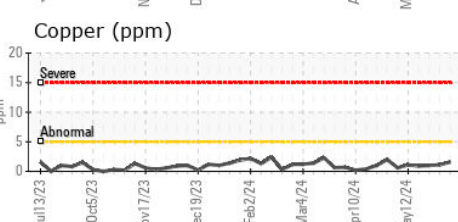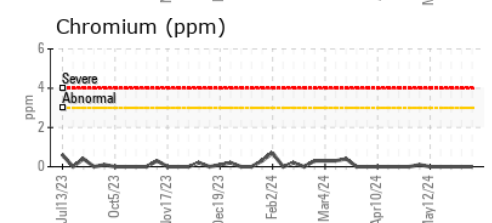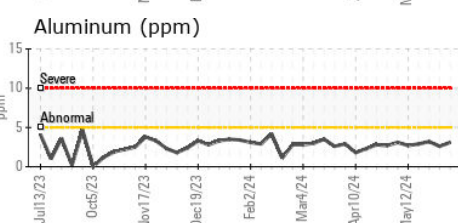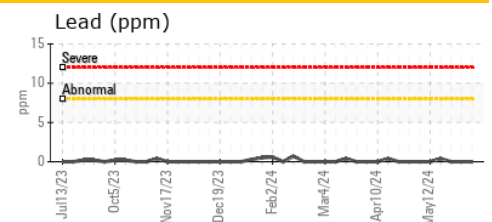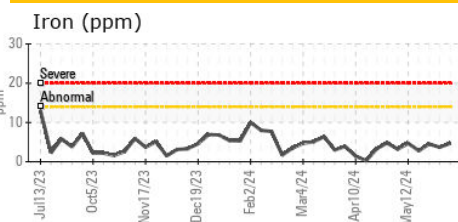

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0775201 Received : 19 Jun 2024
 Lab Number : 06214923 Tested : 20 Jun 2024
 Unique Number : 11087787 Diagnosed : 21 Jun 2024 - Sean Felton
 Test Package : MOB 2 (Additional Tests: PQ)

EDL NA Recips-Morgantown
 Morgantown Powerstation, 950 Shiloh
 Morgantown, PA
 US 19543
 Contact: ARON GUNN
 aron.gunn@edlenergy.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: