



# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Machine Id  
**JOHN DEERE 3010175 (S/N 000361)**  
 Component  
**Swing Drive**  
 Fluid  
**GEAR OIL SAE 80W90 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 80W90. Please confirm.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info |             | <b>JR0219339</b>   | ---      | ---      |
| Sample Date   | Client Info |             | <b>15 Jun 2024</b> | ---      | ---      |
| Machine Age   | hrs         | Client Info | <b>499</b>         | ---      | ---      |
| Oil Age       | hrs         | Client Info | <b>499</b>         | ---      | ---      |
| Oil Changed   | Client Info |             | <b>Not Chngd</b>   | ---      | ---      |
| Sample Status |             |             | <b>NORMAL</b>      | ---      | ---      |

## CONTAMINATION

|       | method    | limit/base | current    | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.2       | <b>NEG</b> | ---      | ---      |

## WEAR METALS

|          | method     | limit/base       | current      | history1 | history2 |
|----------|------------|------------------|--------------|----------|----------|
| PQ       | ASTM D8184 |                  | <b>27</b>    | ---      | ---      |
| Iron     | ppm        | ASTM D5185m >400 | <b>34</b>    | ---      | ---      |
| Chromium | ppm        | ASTM D5185m >10  | <b>&lt;1</b> | ---      | ---      |
| Nickel   | ppm        | ASTM D5185m >10  | <b>0</b>     | ---      | ---      |
| Titanium | ppm        | ASTM D5185m      | <b>&lt;1</b> | ---      | ---      |
| Silver   | ppm        | ASTM D5185m      | <b>0</b>     | ---      | ---      |
| Aluminum | ppm        | ASTM D5185m >25  | <b>0</b>     | ---      | ---      |
| Lead     | ppm        | ASTM D5185m >50  | <b>0</b>     | ---      | ---      |
| Copper   | ppm        | ASTM D5185m >200 | <b>&lt;1</b> | ---      | ---      |
| Tin      | ppm        | ASTM D5185m >10  | <b>0</b>     | ---      | ---      |
| Vanadium | ppm        | ASTM D5185m      | <b>&lt;1</b> | ---      | ---      |
| Cadmium  | ppm        | ASTM D5185m      | <b>0</b>     | ---      | ---      |

## ADDITIVES

|            | method | limit/base        | current      | history1 | history2 |
|------------|--------|-------------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 400   | <b>75</b>    | ---      | ---      |
| Barium     | ppm    | ASTM D5185m 200   | <b>2</b>     | ---      | ---      |
| Molybdenum | ppm    | ASTM D5185m 12    | <b>0</b>     | ---      | ---      |
| Manganese  | ppm    | ASTM D5185m       | <b>2</b>     | ---      | ---      |
| Magnesium  | ppm    | ASTM D5185m 12    | <b>0</b>     | ---      | ---      |
| Calcium    | ppm    | ASTM D5185m 150   | <b>27</b>    | ---      | ---      |
| Phosphorus | ppm    | ASTM D5185m 1650  | <b>525</b>   | ---      | ---      |
| Zinc       | ppm    | ASTM D5185m 125   | <b>6</b>     | ---      | ---      |
| Sulfur     | ppm    | ASTM D5185m 22500 | <b>16673</b> | ---      | ---      |



## CONTAMINANTS

|           | method | limit/base       | current   | history1 | history2 |
|-----------|--------|------------------|-----------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >50  | <b>15</b> | ---      | ---      |
| Sodium    | ppm    | ASTM D5185m >170 | <b>4</b>  | ---      | ---      |
| Potassium | ppm    | ASTM D5185m >20  | <b>2</b>  | ---      | ---      |

## VISUAL

|                  | method | limit/base    | current      | history1 | history2 |
|------------------|--------|---------------|--------------|----------|----------|
| White Metal      | scalar | *Visual NONE  | <b>NONE</b>  | ---      | ---      |
| Yellow Metal     | scalar | *Visual NONE  | <b>NONE</b>  | ---      | ---      |
| Precipitate      | scalar | *Visual NONE  | <b>NONE</b>  | ---      | ---      |
| Silt             | scalar | *Visual NONE  | <b>NONE</b>  | ---      | ---      |
| Debris           | scalar | *Visual NONE  | <b>NONE</b>  | ---      | ---      |
| Sand/Dirt        | scalar | *Visual NONE  | <b>NONE</b>  | ---      | ---      |
| Appearance       | scalar | *Visual NORML | <b>NORML</b> | ---      | ---      |
| Odor             | scalar | *Visual NORML | <b>NORML</b> | ---      | ---      |
| Emulsified Water | scalar | *Visual >0.2  | <b>NEG</b>   | ---      | ---      |
| Free Water       | scalar | *Visual       | <b>NEG</b>   | ---      | ---      |

# OIL ANALYSIS REPORT

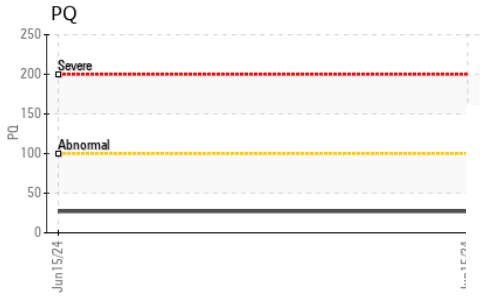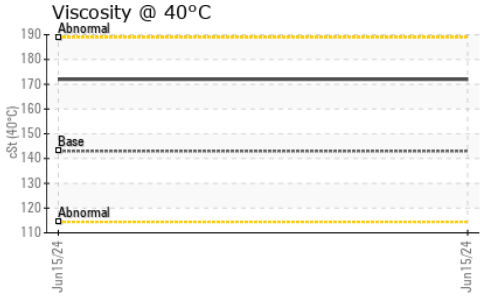





| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
|------------------|--------|------------|---------|----------|----------|

|             |     |           |     |            |     |     |
|-------------|-----|-----------|-----|------------|-----|-----|
| Visc @ 40°C | cSt | ASTM D445 | 143 | <b>172</b> | --- | --- |
|-------------|-----|-----------|-----|------------|-----|-----|

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

|        |          |          |          |          |          |
|--------|----------|----------|----------|----------|----------|
| Color  | no image | no image | no image | no image | no image |
| Bottom | no image | no image | no image | no image | no image |

| GRAPHS |
|--------|
|--------|

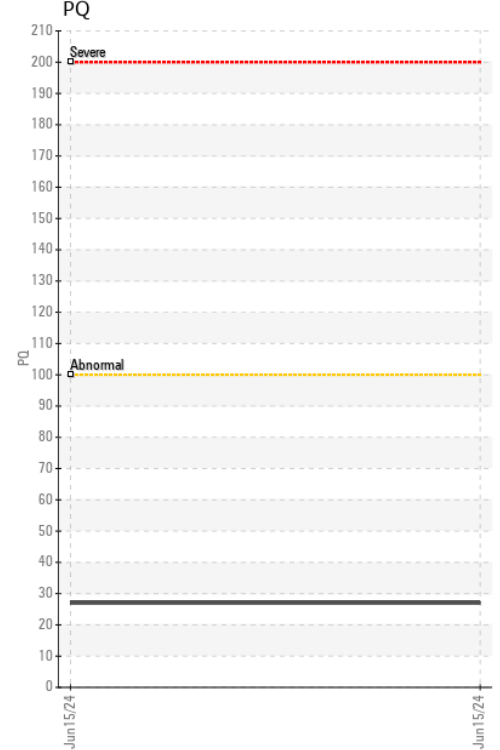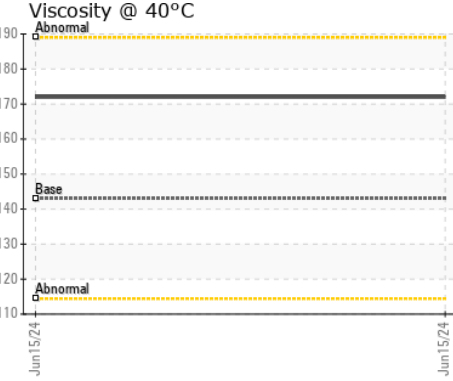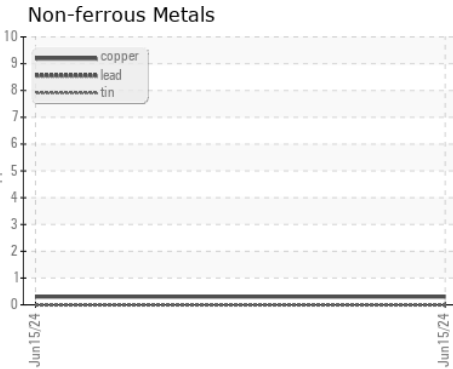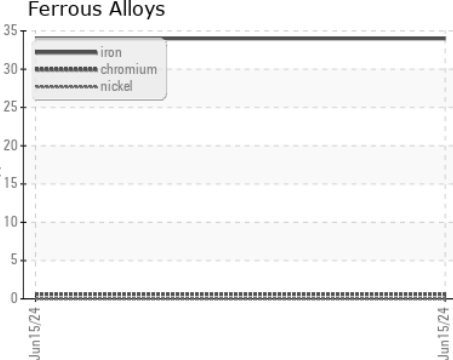

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0219339      **Received** : 19 Jun 2024  
**Lab Number** : **06214967**      **Tested** : 20 Jun 2024  
**Unique Number** : 11087831      **Diagnosed** : 20 Jun 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - ASHLAND**  
 11047 LEADBETTER RD  
 ASHLAND, VA  
 US 23005  
 Contact: DAVID ZIEG  
 dzieg@jamesriverequipment.com  
 T: (804)798-6001  
 F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)