




# OIL ANALYSIS REPORT

Sample Rating Trend

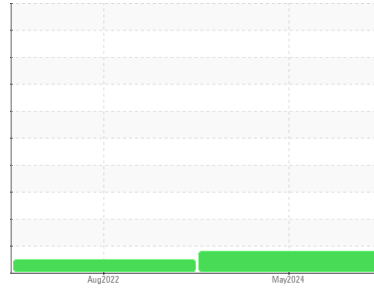

**WEAR**



Machine Id

**1491025**

Component

**Diesel Engine**

Fluid

**MOBIL DELVAC 1300 SUPER 15W40 (--- QTS)**

## DIAGNOSIS

### ▲ Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

### ▲ Wear

The aluminum level is abnormal. All other component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>RPL0019526</b>	RPL0005912	---
Sample Date	Client Info		<b>05 May 2024</b>	16 Aug 2022	---
Machine Age	mls	Client Info	<b>143909</b>	29641	---
Oil Age	mls	Client Info	<b>0</b>	25000	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>ABNORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>100	<b>31</b>	46	---
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	<1	---
Nickel	ppm	ASTM D5185m	>4	<b>1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185m	>20	<b>▲ 24</b>	17	---
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	<1	---
Copper	ppm	ASTM D5185m	>330	<b>2</b>	39	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	3	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	<b>11</b>	46	---
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	---
Molybdenum	ppm	ASTM D5185m	0	<b>73</b>	10	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	2	---
Magnesium	ppm	ASTM D5185m	0	<b>1029</b>	680	---
Calcium	ppm	ASTM D5185m		<b>1182</b>	1473	---
Phosphorus	ppm	ASTM D5185m		<b>1153</b>	751	---
Zinc	ppm	ASTM D5185m		<b>1375</b>	924	---
Sulfur	ppm	ASTM D5185m		<b>3319</b>	3440	---

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<b>6</b>	12	---
Sodium	ppm	ASTM D5185m		<b>0</b>	4	---
Potassium	ppm	ASTM D5185m	>20	<b>15</b>	44	---

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>0.8</b>	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.9</b>	12.8	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.4</b>	26.1	---


## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.7</b>	22.4	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	<b>8.7</b>	6.8	---




# OIL ANALYSIS REPORT


▲ Aluminum (ppm)

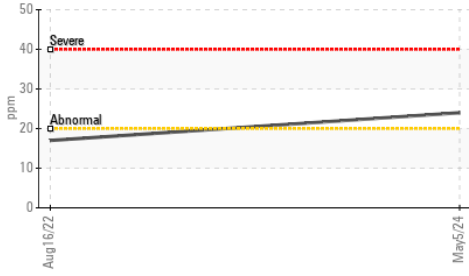


FT-IR (Direct Trend)

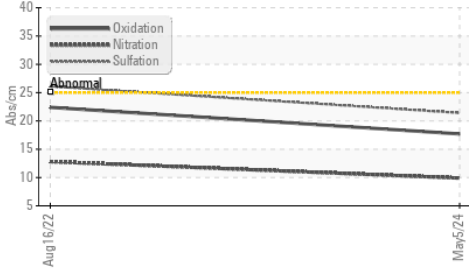

Base Number

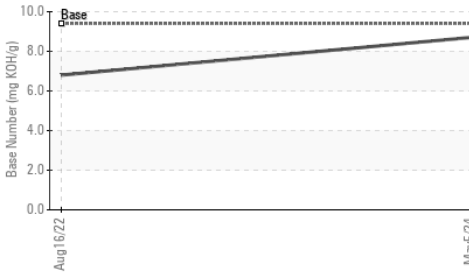

Viscosity @ 100°C

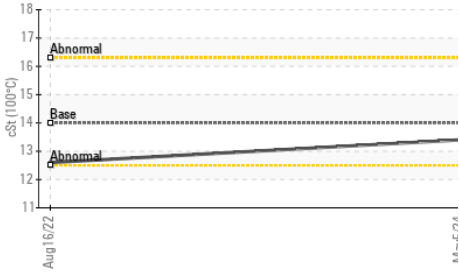


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14	13.4	12.6	---

## GRAPHS


Ferrous Alloys

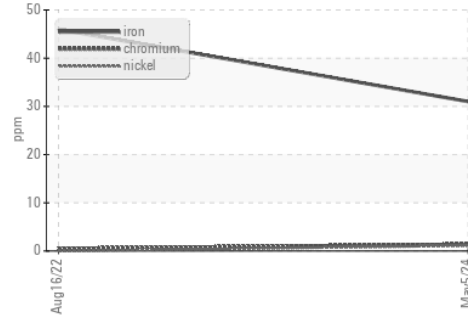


Non-ferrous Metals

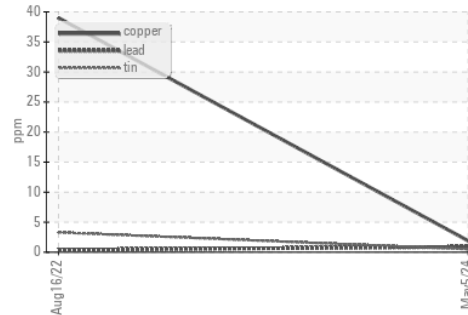

Viscosity @ 100°C

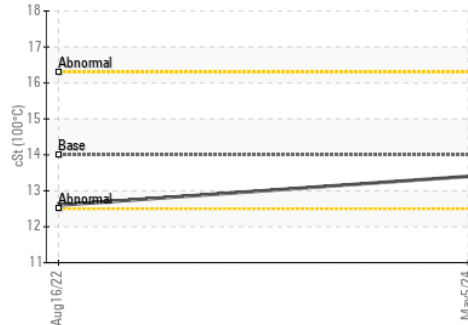

Base Number

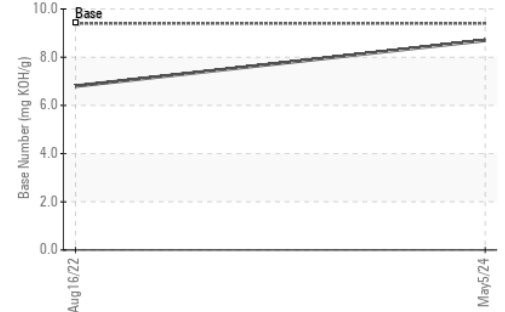

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RPL0019526  
**Lab Number** : 06215485  
**Unique Number** : 11088349  
**Test Package** : FLEET

**Received** : 20 Jun 2024  
**Tested** : 21 Jun 2024  
**Diagnosed** : 21 Jun 2024 - Don Baldrige

**RTL PACLEASE - 7013 - Albuquerque**  
 901 64th St. N.W.  
 Albuquerque, NM  
 US 87121

Contact: Aaron Arrey  
 ArreyA@RushEnterprises.Com  
 T: (505)767-7404

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)