




OIL ANALYSIS REPORT

Area
OKLAHOMA/1151/EG - OTHER SERVICE
 Machine Id
86.100A [OKLAHOMA^1151^EG - OTHER SERVICE]
 Component
Diesel Engine
 Fluid
MOBIL 15W40 (--- GAL)

Sample Rating Trend

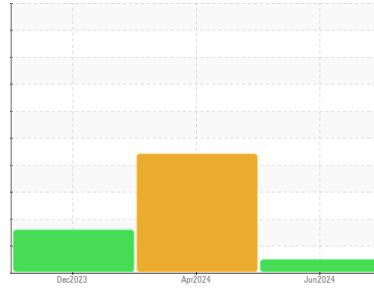

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0935116	WC0914564	WC0874026
Sample Date	Client Info		13 Jun 2024	02 Apr 2024	15 Dec 2023
Machine Age	hrs	Client Info	1058	12112	11780
Oil Age	hrs	Client Info	12112	332	250
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	SEVERE	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	73	38	89
Chromium	ppm	ASTM D5185m >20	2	2	4
Nickel	ppm	ASTM D5185m >2	<1	<1	<1
Titanium	ppm	ASTM D5185m >2	<1	<1	<1
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >25	6	2	6
Lead	ppm	ASTM D5185m >40	4	5	18
Copper	ppm	ASTM D5185m >330	7	8	35
Tin	ppm	ASTM D5185m >15	2	2	<1
Vanadium	ppm	ASTM D5185m	<1	<1	0
Cadmium	ppm	ASTM D5185m	0	<1	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	46	19	33
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	46	15	54
Manganese	ppm	ASTM D5185m	<1	<1	1
Magnesium	ppm	ASTM D5185m	590	184	535
Calcium	ppm	ASTM D5185m	2161	▲ 691	1794
Phosphorus	ppm	ASTM D5185m	871	▲ 294	734
Zinc	ppm	ASTM D5185m	1150	▲ 346	969
Sulfur	ppm	ASTM D5185m	3113	▲ 954	2524

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	8	9	▲ 29
Sodium	ppm	ASTM D5185m >118	16	<1	48
Potassium	ppm	ASTM D5185m >20	3	2	17
Fuel	%	ASTM D3524 >5	1.4	▲ 60.9	<1.0

INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	1.9	0.4	0.5
Nitration	Abs/cm	*ASTM D7624 >20	14.7	7.3	10.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	29.5	15.6	25.0

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	29.5	11.3	24.9
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	7.2	9.3







OIL ANALYSIS REPORT

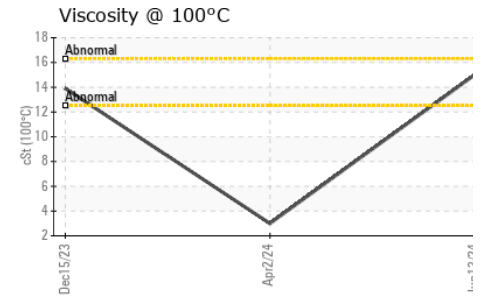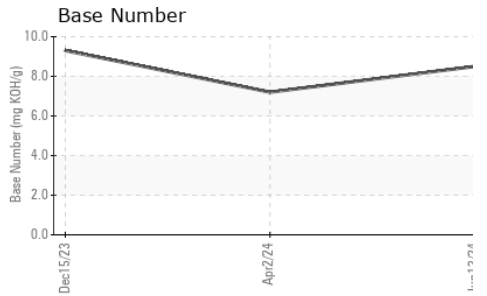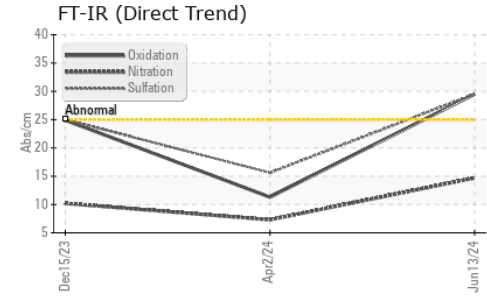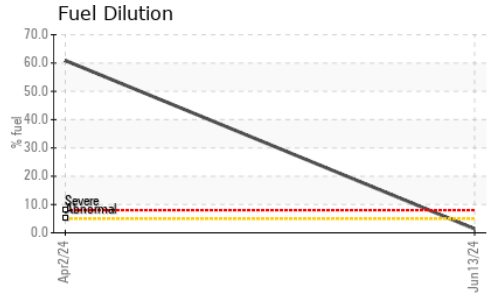

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.0	▲ 3.0	13.9

GRAPHS

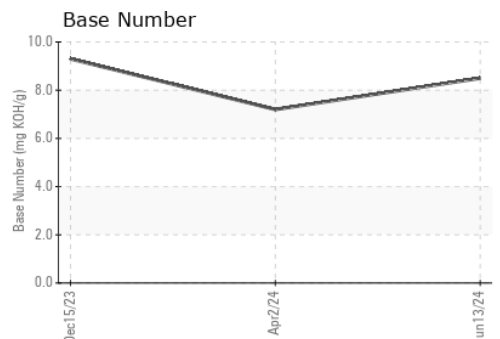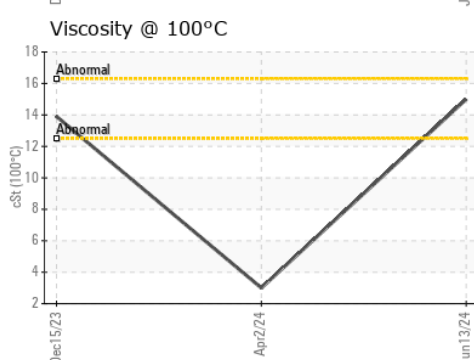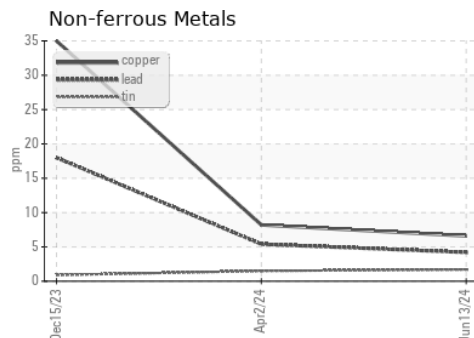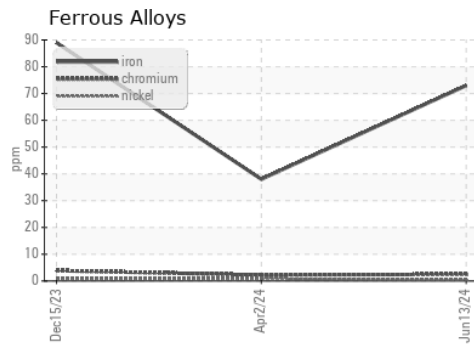

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0935116 **Received** : 20 Jun 2024
Lab Number : 06215628 **Tested** : 24 Jun 2024
Unique Number : 11088492 **Diagnosed** : 24 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PercentFuel, TBN)

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: SHAWN SOUTH
 shawn.south@sherwood.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x:
F: x: