

OIL ANALYSIS REPORT

Sample Rating Trend





Machine Id VOLVO A40G 342441

Component Hydraulic System Fluid

{not provided} (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		ML0001750		
Sample Date		Client Info		19 Jun 2024		
Machine Age	hrs	Client Info		5950		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
CONTAMINATION	J	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>10	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	2		
Lead	ppm	ASTM D5185m	>20	1		
Copper	ppm	ASTM D5185m	>150	1		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		79		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		31		
Calcium	ppm	ASTM D5185m		2628		
Phosphorus	ppm	ASTM D5185m		970		
Zinc	ppm	ASTM D5185m		1202		
Sulfur	ppm	ASTM D5185m		4516		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	11		
Sodium	ppm	ASTM D5185m		6		
Potassium	ppm	ASTM D5185m	>20	3		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		8220		
Particles >6µm		ASTM D7647	>5000	2299		
Particles >14µm		ASTM D7647	>160	83		
Particles >21µm		ASTM D7647	>40	11		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/19/14	20/18/14		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.75		
5·59·37) Rev: 1	0 - 0			Contact/Locatio		

Report Id: VOLVO1023 [WUSCAR] 06215759 (Generated: 06/23/2024 05:59:37) Rev: 1

Contact/Location: MATT CLARK - VOLVO1023 Page 1 of 2



(J-046 tsp 44

42

40 Ab 38

10

6

41

n,

of particles (1 ml)

Particle Trend

ί4μm

OIL ANALYSIS REPORT

scalar

scalar

scalar

scalar


scalar


scalar

scalar

scalar

cSt

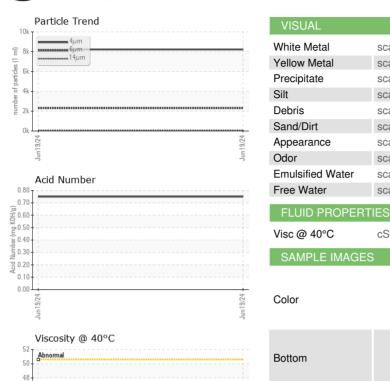

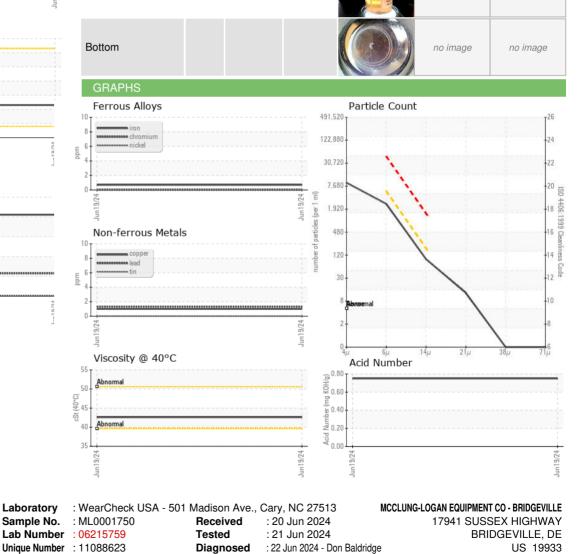

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

>0.1

*Visual

*Visual

*Visual

*Visual

*Visual

*Visual

*Visual

*Visual

ASTM D445

scalar *Visual

scalar *Visual

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

42.6

no image

no image



Test Package : CONST Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

US 19933 Contact: MATT CLARK MCLARK@mcclung-logan.com T: (302)337-3400 F: (302)337-9083

Contact/Location: MATT CLARK - VOLVO1023