




OIL ANALYSIS REPORT

Sample Rating Trend

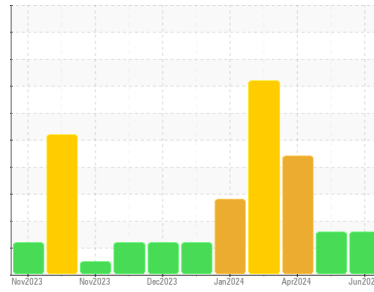

VISCOSITY



Area
RIG 816
 Machine Id
R816-MP-02
 Component
Gearbox
 Fluid
GEAR OIL ISO 320 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The oil viscosity is lower than normal. Confirm oil type. The AN level is acceptable for this fluid.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | KL0014476 | KL0014289 | KL0014297 |
| Sample Date | Client Info | | 11 Jun 2024 | 07 May 2024 | 03 Apr 2024 |
| Machine Age | hrs | Client Info | 0 | 0 | 0 |
| Oil Age | hrs | Client Info | 0 | 0 | 0 |
| Oil Changed | Client Info | | N/A | N/A | N/A |
| Sample Status | | | ABNORMAL | ABNORMAL | ABNORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.2 | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 | |
|----------|--------|-------------|---------|--------------|----------|----|
| Iron | ppm | ASTM D5185m | >200 | 14 | 44 | 91 |
| Chromium | ppm | ASTM D5185m | >10 | 0 | 0 | <1 |
| Nickel | ppm | ASTM D5185m | >10 | <1 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | 0 | <1 | 0 |
| Silver | ppm | ASTM D5185m | | 0 | <1 | 0 |
| Aluminum | ppm | ASTM D5185m | >25 | 2 | 9 | 12 |
| Lead | ppm | ASTM D5185m | >50 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >200 | 22 | 38 | 43 |
| Tin | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | <1 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 | |
|------------|--------|-------------|---------|--------------|----------|------|
| Boron | ppm | ASTM D5185m | 50 | <1 | 0 | 0 |
| Barium | ppm | ASTM D5185m | 15 | 0 | 5 | 16 |
| Molybdenum | ppm | ASTM D5185m | 15 | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | | <1 | <1 | 1 |
| Magnesium | ppm | ASTM D5185m | 50 | 6 | 3 | 12 |
| Calcium | ppm | ASTM D5185m | 50 | 19 | 84 | 117 |
| Phosphorus | ppm | ASTM D5185m | 350 | 183 | 134 | 135 |
| Zinc | ppm | ASTM D5185m | 100 | 43 | 35 | 26 |
| Sulfur | ppm | ASTM D5185m | 12500 | 11606 | 8627 | 8263 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 | |
|-----------|--------|-------------|---------|-----------|----------|-----|
| Silicon | ppm | ASTM D5185m | >50 | 12 | 30 | 52 |
| Sodium | ppm | ASTM D5185m | | 9 | 100 | 508 |
| Potassium | ppm | ASTM D5185m | >20 | 4 | 6 | 15 |

FLUID CLEANLINESS





| | method | limit/base | current | history1 | history2 |
|-----------------|--------------|------------|-----------------|----------|----------|
| Particles >4µm | ASTM D7647 | >20000 | 47624 | 128683 | 183224 |
| Particles >6µm | ASTM D7647 | >5000 | 8222 | 26884 | 96764 |
| Particles >14µm | ASTM D7647 | >640 | 159 | 114 | 753 |
| Particles >21µm | ASTM D7647 | >160 | 19 | 6 | 47 |
| Particles >38µm | ASTM D7647 | >40 | 0 | 0 | 1 |
| Particles >71µm | ASTM D7647 | >10 | 0 | 0 | 0 |
| Oil Cleanliness | ISO 4406 (c) | >21/19/16 | 23/20/14 | 24/22/14 | 25/24/17 |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 | |
|------------------|----------|------------|---------|-------------|----------|------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.85 | 0.37 | 0.30 | 0.31 |




OIL ANALYSIS REPORT

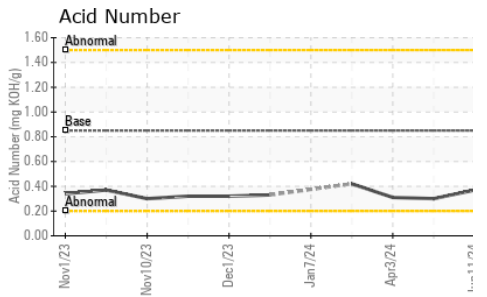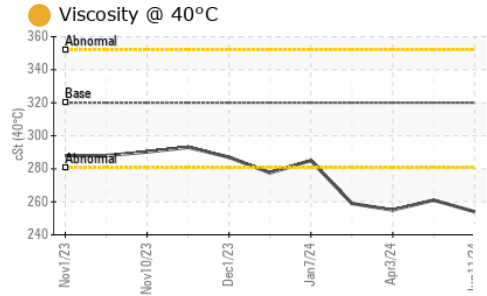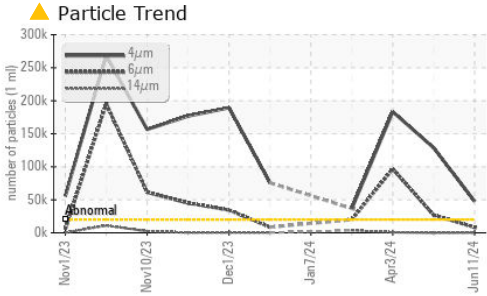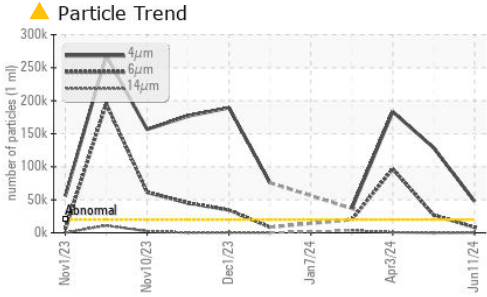





| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|---------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 320 | ● 254 | ● 261 | ● 255 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

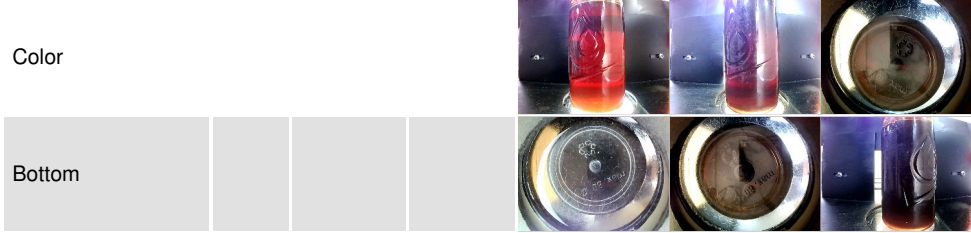

GRAPHS

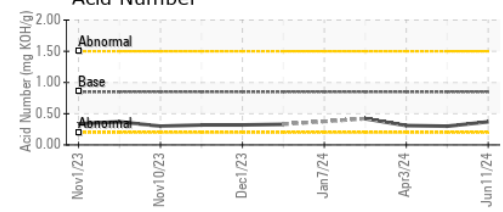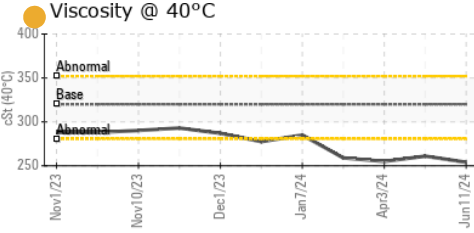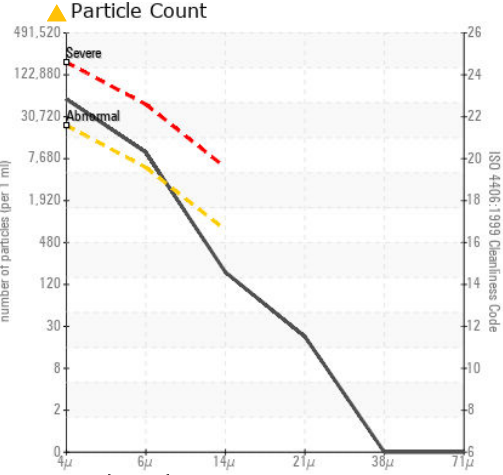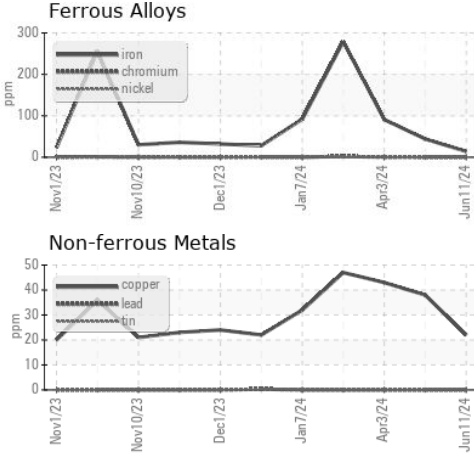

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0014476 **Received** : 20 Jun 2024
Lab Number : 06215780 **Tested** : 21 Jun 2024
Unique Number : 11088644 **Diagnosed** : 22 Jun 2024 - Don Baldrige
Test Package : MOB 2 (Additional Tests: PrtCount)

PATTERSON - UTI DRILLING
 9915 WEST INDUSTRIAL
 MIDLAND, TX
 US 79706
 Contact: RICKY MATA
 ricky.mata@patenergy.com
 T: (832)219-4559
 F: (432)561-9388

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)