


OIL ANALYSIS REPORT

Sample Rating Trend

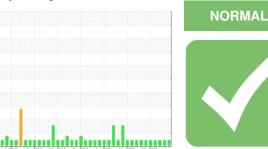

Machine Id

BARREL 5 TYSROG RECYCLED NH3

Refrigeration Compressor

USPI ALT-68 SC (--- GAL)

Recommendation

This is a baseline read-out on the submitted sample.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		g2011 Jul20	2 Aug2013 May2017	Nov2018 Feb2020 Mar2022 I	Лаг 2 023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0013149	USP0011897	USP103110
Sample Date		Client Info		19 Jun 2024	01 May 2024	07 Feb 2024
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0	<1	0
Chromium	ppm	ASTM D5185m	>2	0	<1	0
Nickel	ppm	ASTM D5185m		<1	<1	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>3	0	0	0
Lead	ppm	ASTM D5185m	>2	0	<1	0
Copper	ppm	ASTM D5185m	>8	0	<1	0
Tin	ppm	ASTM D5185m	>4	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	<1	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	0
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		<1	0	0
Calcium	ppm	ASTM D5185m		0	<1	1
Phosphorus	ppm	ASTM D5185m		<1	0	0
Zinc	ppm	ASTM D5185m		3	0	0
Sulfur	ppm	ASTM D5185m	50	0	974	42
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	1	2	<1
Sodium	ppm	ASTM D5185m		2	2	0
Potassium	ppm	ASTM D5185m	>20	3	2	0
Water	%	ASTM D6304	>0.01	0.006	0.008	0.008
ppm Water	ppm	ASTM D6304	>100	63	83	87
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		574	2629	2325
Particles >6µm		ASTM D7647	>2500	130	524	542
Particles >14µm		ASTM D7647	>320	10	27	20
Particles >21µm		ASTM D7647	>80	2	4	3
Particles >38µm		ASTM D7647	>20	0	0	0
Particles >71μm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/18/15	16/14/10	19/16/12	18/16/11
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.014	0.04	0.014





OIL ANALYSIS REPORT

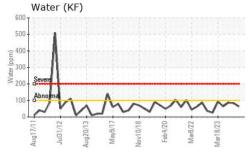


Pai	rticle T	rend					
≘ 6k		m m µm					
(mu) 5k - Sk -					1	1	
1k - N	and the same		A	1	人	1	W
Aug17/11	Jul31/12	Aug20/13	May9/17	Nov10/18	Feb4/20	Mar8/22	Mar18/23







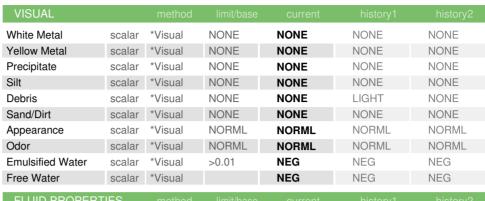


I LOID I NOI LI	IIILO	memou			HISTOLAL	HISTOLYZ
Visc @ 40°C	cSt	ASTM D445	65.6	64.6	63.3	62.5

SAMPLE	IMAGES





Color

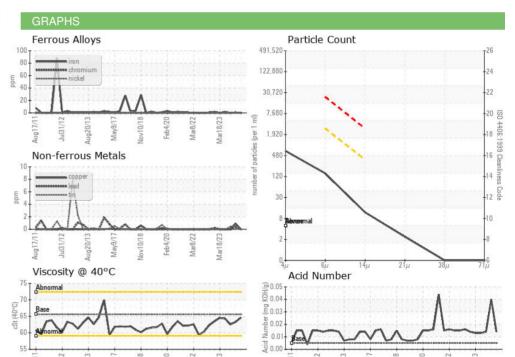

: 20 Jun 2024

: 21 Jun 2024

: 24 Jun 2024 - Doug Bogart





Certificate 12367

Laboratory Sample No.

Lab Number : 06215816 Unique Number : 11088680

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : USP0013149

Tested Diagnosed Test Package : IND 2

Received

TYSON DC -ROGERS-USP

400 W Olrich St ROGERS, AR US 72756

Contact: MARK LONGING

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: