

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

FS ELLIOTT B4EV2E121-2 - UNIFI

Compressor Fluid

DIAMOND BLUE (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

MPC (Membrane Patch Colorimetry) test indicates acceptable levels of varnish present. There is no indication of any contamination in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0892170	WC0892167	WC0874269
Sample Date		Client Info		17 Jun 2024	15 Mar 2024	09 Nov 2023
Machine Age	hrs	Client Info		58248	56054	54559
Oil Age	hrs	Client Info		2194	12316	10821
Oil Changed		Client Info		Not Changd	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINATION	N	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m		<1	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	0	0
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	0	0	0
Tin	ppm	ASTM D5185m	>15	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		450	429	398
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m		<1	0	1
Calcium	ppm	ASTM D5185m		1	1	1
Phosphorus	ppm	ASTM D5185m		7	43	6
Zinc	ppm	ASTM D5185m		4	0	0
Sulfur	ppm	ASTM D5185m		278	147	170
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	<1
Sodium	ppm	ASTM D5185m		4	7	7
Potassium	ppm	ASTM D5185m	>20	5	0	0
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.137	0.565	0.44
MPC Varnish Potential	Scale	ASTM D7843	>15	1	10	8



OIL ANALYSIS REPORT

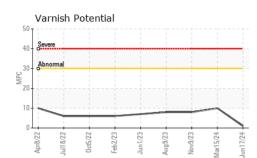


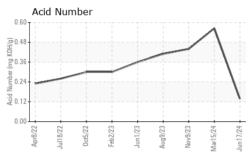




VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		29.3	28.4	27.8
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						
				100		

Bottom



MPC

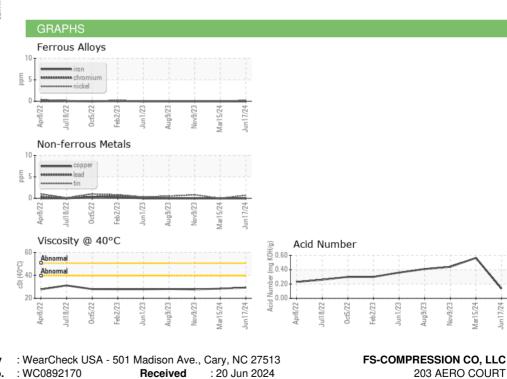


Laboratory Sample No. ñ Lab Number : 06215834 Tested : 27 Jun 2024 GREENSBORO, NC Unique Number : 11088698 Diagnosed : 27 Jun 2024 - Jonathan Hester US 27409 Test Package : IND 2 (Additional Tests: MPC) Contact: Dallas Burcham Certificate 12367 dallas.burcham@fs-compression.com To discuss this sample report, contact Customer Service at 1-800-237-1369. T: (336)605-9622 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (336)605-9844

Report Id: AIRGREWC [WUSCAR] 06215834 (Generated: 06/27/2024 09:03:19) Rev: 1

Contact/Location: Dallas Burcham - AIRGREWC

Page 2 of 4

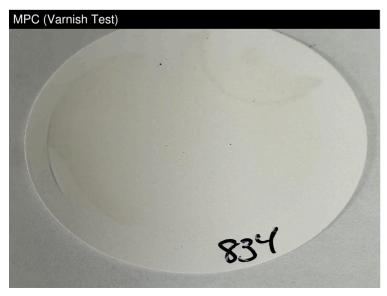



Report Id: AIRGREWC [WUSCAR] 06215834 (Generated: 06/27/2024 09:03:22) Rev: 1

This page left intentionally blank