OIL ANALYSIS REPORT

Sample Rating Trend

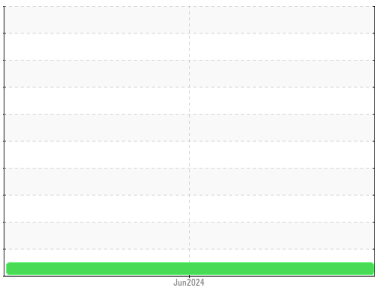

NORMAL

Machine Id
2000 HONDA DOUG
Component
Gasoline Engine
Fluid
CASTROL GTX 10W30 (6 QTS)

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
There is no indication of any contamination in the oil.

Fluid Condition
The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**WC06215919**	---	---
Sample Date		Client Info		**19 Jun 2024**	---	---
Machine Age	mls	Client Info		**178000**	---	---
Oil Age	mls	Client Info		**6000**	---	---
Oil Changed		Client Info		**Not Changd**	---	---
Sample Status				**NORMAL**	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel		WC Method	>4.0	**<1.0**	---	---
Water		WC Method	>0.2	**NEG**	---	---
Glycol		WC Method		**NEG**	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	**11**	---	---
Chromium	ppm	ASTM D5185m	>20	**<1**	---	---
Nickel	ppm	ASTM D5185m	>5	**0**	---	---
Titanium	ppm	ASTM D5185m		**<1**	---	---
Silver	ppm	ASTM D5185m	>2	**0**	---	---
Aluminum	ppm	ASTM D5185m	>40	**3**	---	---
Lead	ppm	ASTM D5185m	>50	**5**	---	---
Copper	ppm	ASTM D5185m	>155	**3**	---	---
Tin	ppm	ASTM D5185m	>10	**0**	---	---
Vanadium	ppm	ASTM D5185m		**<1**	---	---
Cadmium	ppm	ASTM D5185m		**0**	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	26	**52**	---	---
Barium	ppm	ASTM D5185m	0	**<1**	---	---
Molybdenum	ppm	ASTM D5185m	67	**102**	---	---
Manganese	ppm	ASTM D5185m		**<1**	---	---
Magnesium	ppm	ASTM D5185m	188	**619**	---	---
Calcium	ppm	ASTM D5185m	1273	**1143**	---	---
Phosphorus	ppm	ASTM D5185m	458	**795**	---	---
Zinc	ppm	ASTM D5185m	720	**918**	---	---
Sulfur	ppm	ASTM D5185m	1972	**3383**	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	**6**	---	---
Sodium	ppm	ASTM D5185m	>400	**4**	---	---
Potassium	ppm	ASTM D5185m	>20	**4**	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		**0.1**	---	---
Nitration	Abs/cm	*ASTM D7624	>20	**9.2**	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	**20.8**	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	**13.4**	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		**1.49**	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		**5.17**	---	---

OIL ANALYSIS REPORT

FT-IR (Direct Trend)

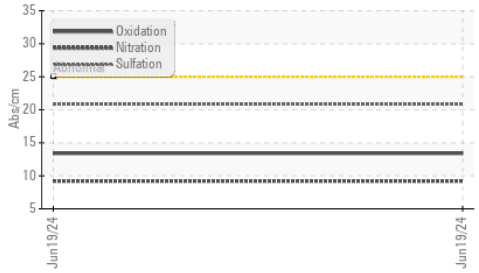

Acid Number

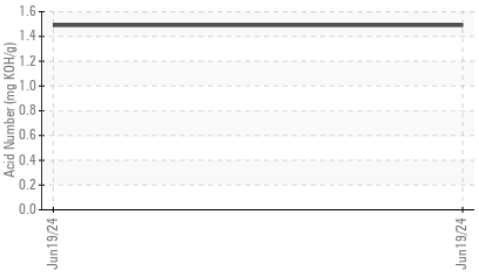

Base Number

Viscosity @ 100°C

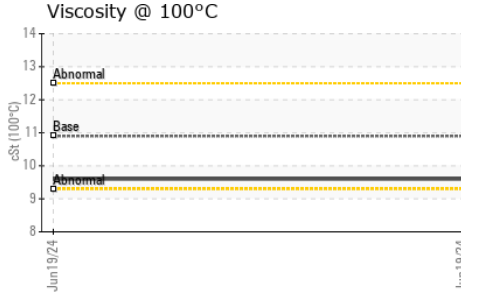

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	---	---
Yellow Metal	scalar	*Visual	NONE	**NONE**	---	---
Precipitate	scalar	*Visual	NONE	**NONE**	---	---
Silt	scalar	*Visual	NONE	**NONE**	---	---
Debris	scalar	*Visual	NONE	**NONE**	---	---
Sand/Dirt	scalar	*Visual	NONE	**NONE**	---	---
Appearance	scalar	*Visual	NORML	**NORML**	---	---
Odor	scalar	*Visual	NORML	**NORML**	---	---
Emulsified Water	scalar	*Visual	>0.2	**NEG**	---	---
Free Water	scalar	*Visual		**NEG**	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	10.9	**9.6**	---	---

GRAPHS

Iron (ppm)

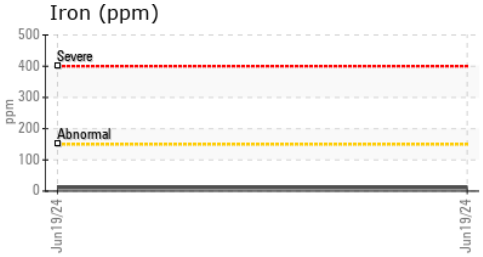

Lead (ppm)

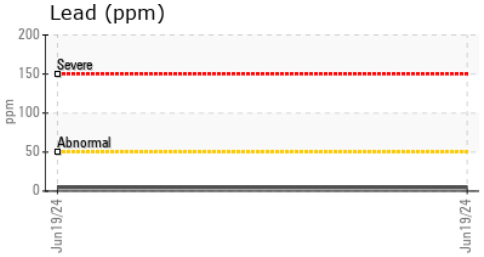

Aluminum (ppm)

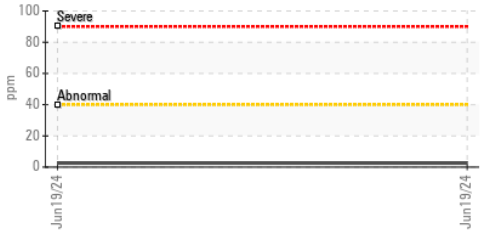

Chromium (ppm)

Copper (ppm)

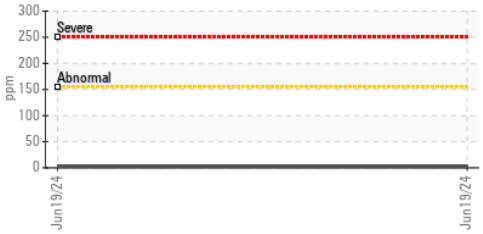

Silicon (ppm)

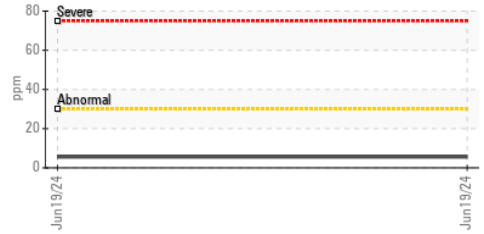

Viscosity @ 100°C

Base Number

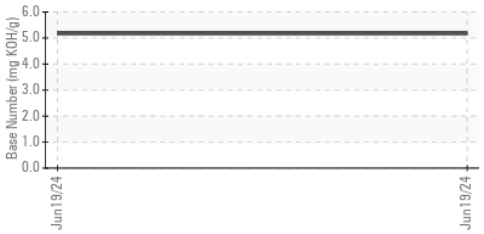

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC06215919 **Received** : 20 Jun 2024
Lab Number : 06215919 **Tested** : 21 Jun 2024
Unique Number : 11088783 **Diagnosed** : 21 Jun 2024 - Doug Bogart
Test Package : MOB 2 (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

WEARCHECK USA
501 Madison Ave
Cary, NC
US 27513
Contact: Doug Bogart
dbogart@wearcheckusa.com
T: (919)379-4016
F: (919)379-4050