

# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Machine Id  
**SYNTHETIC VACUUM PUMP 100**  
 Component  
**New (Unused) Oil**  
 Fluid  
**{not provided} (--- QTS)**

**DIAGNOSIS**

**Recommendation**

This is a baseline read-out on the submitted sample.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>TO10003237</b>	---	---
Sample Date	Client Info			<b>17 Jun 2024</b>	---	---
Machine Age	hrs	Client Info		<b>0</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed	Client Info			<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		<b>22</b>	---	---
Iron	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Lead	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Tin	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---	---





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	---	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>0</b>	---	---
Calcium	ppm	ASTM D5185m		<b>0</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>152</b>	---	---
Zinc	ppm	ASTM D5185m		<b>5</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>1604</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<b>0</b>	---	---
Sodium	ppm	ASTM D5185m		<b>1</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	---	---
Water	%	ASTM D6304		<b>0.003</b>	---	---
ppm Water	ppm	ASTM D6304		<b>35</b>	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<b>245</b>	---	---
Particles >6µm		ASTM D7647	>1300	<b>54</b>	---	---
Particles >14µm		ASTM D7647	>160	<b>6</b>	---	---
Particles >21µm		ASTM D7647	>40	<b>2</b>	---	---
Particles >38µm		ASTM D7647	>10	<b>0</b>	---	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>15/13/10</b>	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.44</b>	---	---

# OIL ANALYSIS REPORT

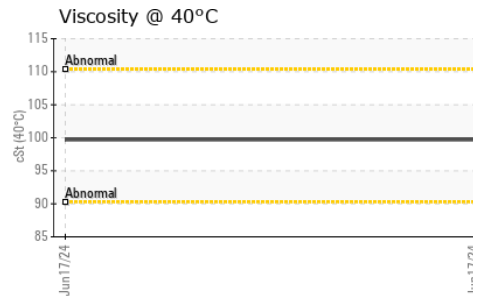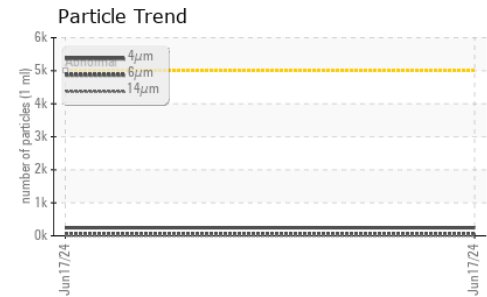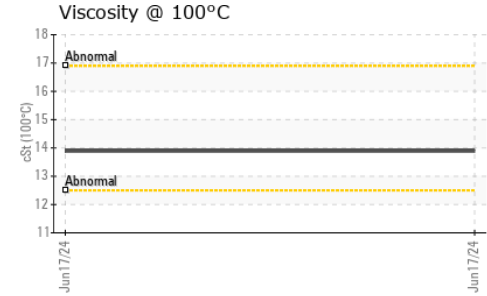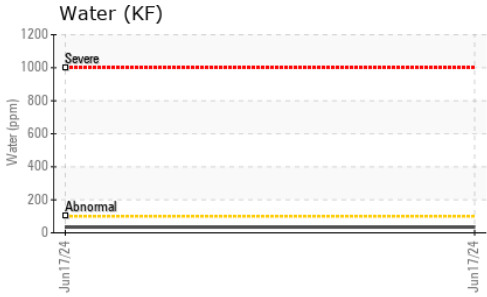





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	NEG	---	---
Free Water	scalar	*Visual	NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	99.7	---	---
Visc @ 100°C	cSt	ASTM D445	13.89	---	---
Viscosity Index (VI)	Scale	ASTM D2270	141	---	---

### SAMPLE IMAGES

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

### GRAPHS

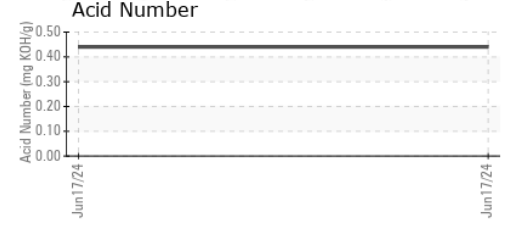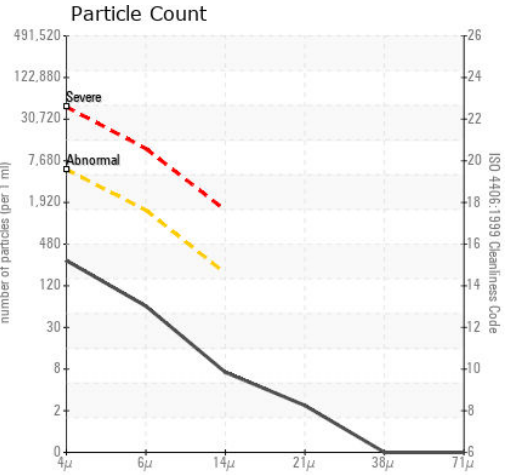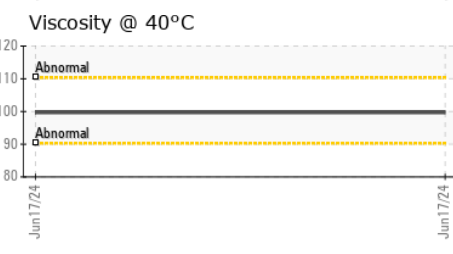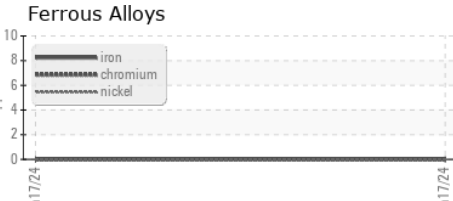

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TO10003237  
**Lab Number** : 06216235  
**Unique Number** : 11089099  
**Test Package** : IND 2 ( Additional Tests: FT-IR, KF, KV100, PQ, PrtCount, VI )

**TULCO OILS INC (001-TULSA DIVISION)**  
 5240 EAST PINE  
 TULSA, OK  
 US 74115

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Contact: DYLAN COPE  
 dylancope@tulco.com

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

T: (800)375-2347

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: x: