


OIL ANALYSIS REPORT



Machine Id
CATERPILLAR 980K 6058 (S/N W7K00517)
 Component
Hydraulic System
 Fluid
TULCO LUBSOIL SUPER HYDRAULIC HZ 46 (45 GAL)

Sample Rating Trend

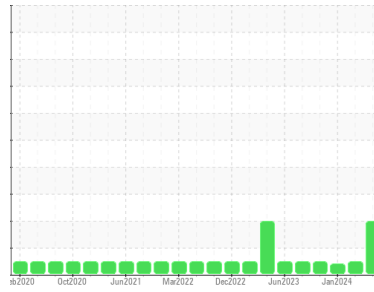

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		TO10003655	TO10003320	TO10002972
Sample Date	Client Info		17 Jun 2024	06 Apr 2024	26 Jan 2024
Machine Age	hrs	Client Info	20455	19983	19449
Oil Age	hrs	Client Info	6140	5668	5134
Oil Changed	Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status			ABNORMAL	NORMAL	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	1	2	4
Chromium	ppm	ASTM D5185m >10	0	0	0
Nickel	ppm	ASTM D5185m >10	0	0	0
Titanium	ppm	ASTM D5185m	0	0	<1
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >10	<1	0	<1
Lead	ppm	ASTM D5185m >10	0	0	0
Copper	ppm	ASTM D5185m >75	2	2	2
Tin	ppm	ASTM D5185m >10	0	0	<1
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0
Manganese	ppm	ASTM D5185m	<1	0	<1
Magnesium	ppm	ASTM D5185m	170	137	167
Calcium	ppm	ASTM D5185m	155	140	144
Phosphorus	ppm	ASTM D5185m	852	673	755
Zinc	ppm	ASTM D5185m	1043	799	896
Sulfur	ppm	ASTM D5185m	3616	2780	2693

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	1	<1	1
Sodium	ppm	ASTM D5185m	4	5	2
Potassium	ppm	ASTM D5185m >20	4	0	<1
Water	%	ASTM D6304 >0.1	NEG	NEG	NEG






FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 15842	2586	---
Particles >6µm	ASTM D7647	>1300	▲ 5810	787	---
Particles >14µm	ASTM D7647	>160	▲ 377	33	---
Particles >21µm	ASTM D7647	>40	▲ 63	5	---
Particles >38µm	ASTM D7647	>10	0	0	---
Particles >71µm	ASTM D7647	>3	0	0	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 21/20/16	19/17/12	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.68	0.72	0.70


OIL ANALYSIS REPORT

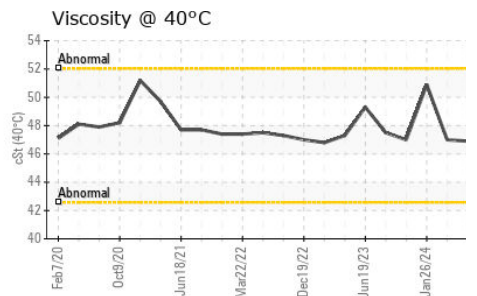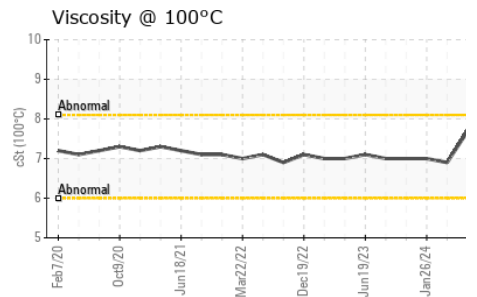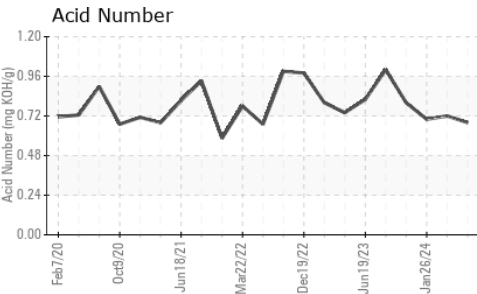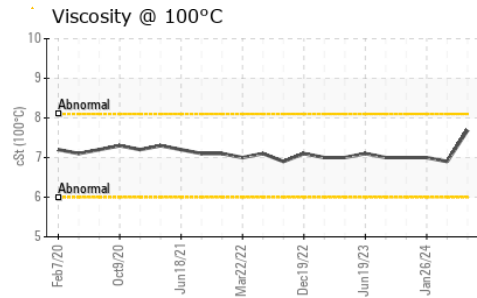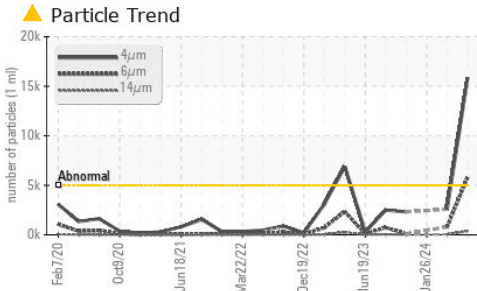






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46.9	47.0	50.9
Visc @ 100°C	cSt	ASTM D445	7.69	6.9	7
Viscosity Index (VI)	Scale	ASTM D2270	131	101	92

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

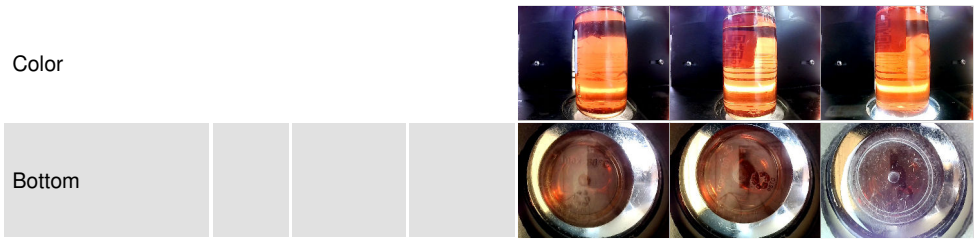

GRAPHS

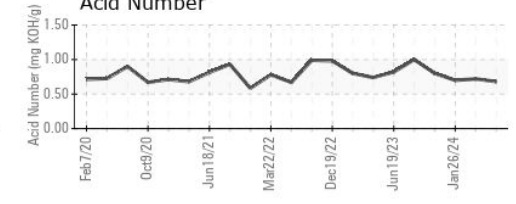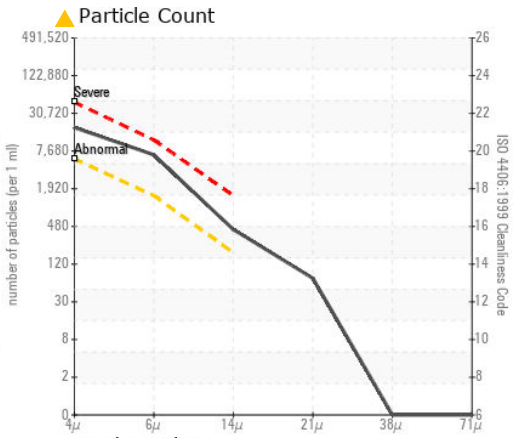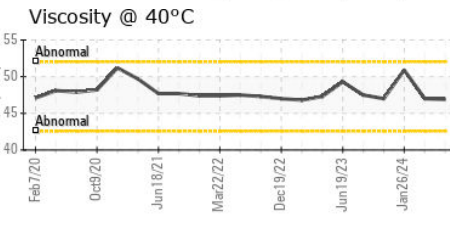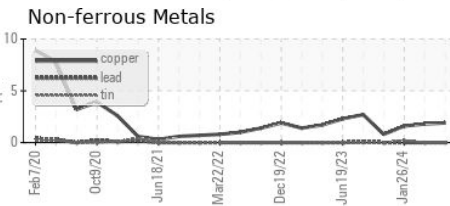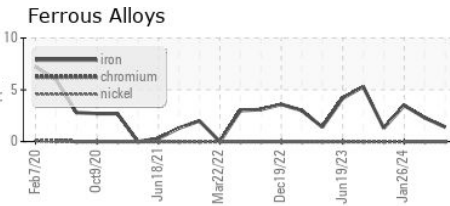

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO10003655 **Received** : 20 Jun 2024
Lab Number : 06216289 **Tested** : 25 Jun 2024
Unique Number : 11089153 **Diagnosed** : 25 Jun 2024 - Jonathan Hester
Test Package : MOB 2 (Additional Tests: KF, KV100, VI)

ANCHOR STONE TULSA ROCK
 TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE
 TULSA, OK
 US 74137
 Contact: MIKE SNYDER
 msnyder@anchorstoneco.com
 T: (417)850-9635
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)