

# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Machine Id  
**OXY LOST TANKS 18 HP2**  
 Component  
**Compressor**  
 Fluid  
**CIMARRON HB-150 (--- GAL)**

**DIAGNOSIS**

**Recommendation**  
 Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

**Fluid Condition**  
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

**SAMPLE INFORMATION** method limit/base current history1 history2

Sample Number	Client Info	<b>TO20000376</b>	---	---
Sample Date	Client Info	<b>19 Jun 2024</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---
Oil Age	hrs	Client Info	<b>0</b>	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>NORMAL</b>	---	---

**WEAR METALS** method limit/base current history1 history2

Iron	ppm	ASTM D5185m	>50	<b>0</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185m	>25	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>50	<b>0</b>	---	---
Tin	ppm	ASTM D5185m	>15	<b>1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---	---

**ADDITIVES** method limit/base current history1 history2

Boron	ppm	ASTM D5185m	0	<b>0</b>	---	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	---	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	0	<b>2</b>	---	---
Calcium	ppm	ASTM D5185m	0	<b>&lt;1</b>	---	---
Phosphorus	ppm	ASTM D5185m	0	<b>5</b>	---	---
Zinc	ppm	ASTM D5185m	0	<b>4</b>	---	---
Sulfur	ppm	ASTM D5185m	0	<b>102</b>	---	---

**CONTAMINANTS** method limit/base current history1 history2

Silicon	ppm	ASTM D5185m	>25	<b>0</b>	---	---
Sodium	ppm	ASTM D5185m		<b>1</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	---	---
Water	%	ASTM D6304	>2.26	<b>0.619</b>	---	---
ppm Water	ppm	ASTM D6304	>22600	<b>6190</b>	---	---






**FLUID CLEANLINESS** method limit/base current history1 history2

Particles >4µm	ASTM D7647	>10000	<b>6622</b>	---	---
Particles >6µm	ASTM D7647	>2500	<b>2370</b>	---	---
Particles >14µm	ASTM D7647	>320	<b>208</b>	---	---
Particles >21µm	ASTM D7647	>80	<b>51</b>	---	---
Particles >38µm	ASTM D7647	>20	<b>2</b>	---	---
Particles >71µm	ASTM D7647	>4	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>20/18/15	<b>20/18/15</b>	---	---

**FLUID DEGRADATION** method limit/base current history1 history2

Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.13</b>	---	---
------------------	----------	------------	--	-------------	-----	-----

# OIL ANALYSIS REPORT

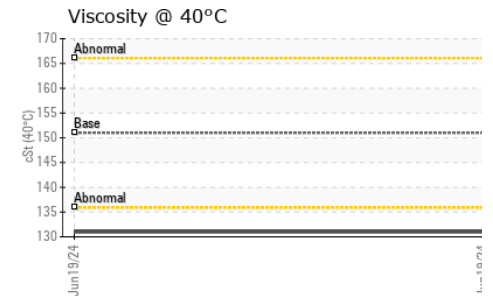
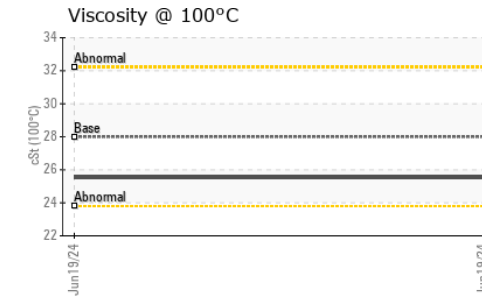
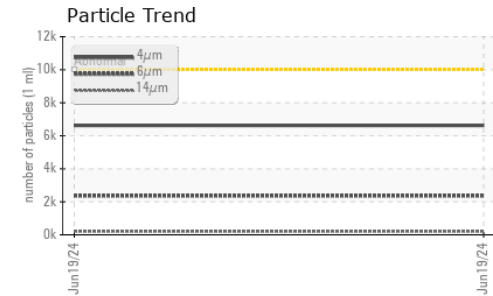
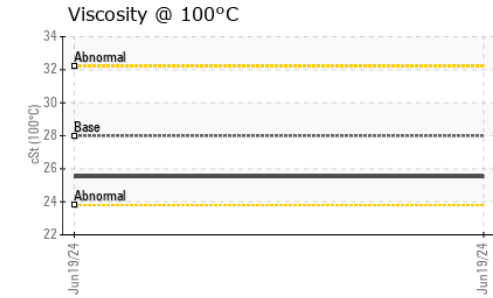
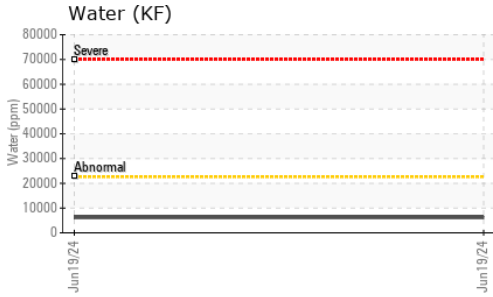


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---
Emulsified Water	scalar	*Visual	>2.26	<b>NEG</b>	---
Free Water	scalar	*Visual		<b>NEG</b>	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	151	<b>131</b>	---
Visc @ 100°C	cSt	ASTM D445	28	<b>25.53</b>	---
Viscosity Index (VI)	Scale	ASTM D2270	224	<b>230</b>	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

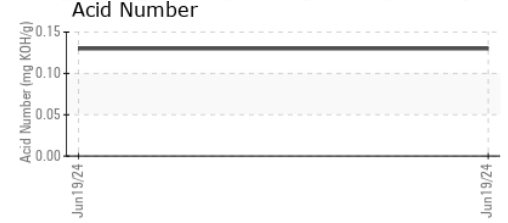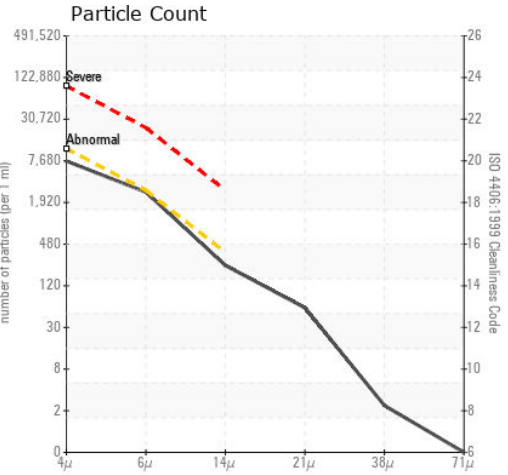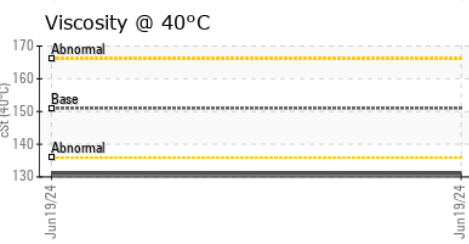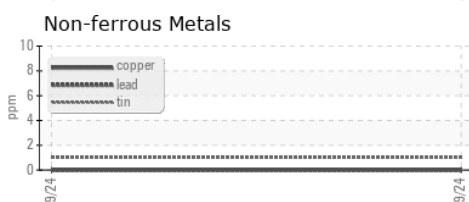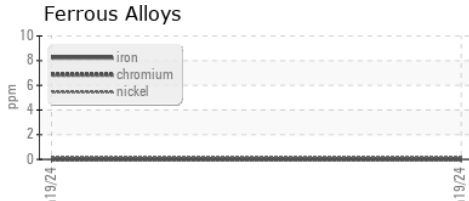

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TO20000376  
**Lab Number** : 06216306  
**Unique Number** : 11089170  
**Test Package** : IND 2 ( Additional Tests: KF, KV100, PrtCount, VI )  
**Received** : 20 Jun 2024  
**Tested** : 25 Jun 2024  
**Diagnosed** : 25 Jun 2024 - Jonathan Hester

**CIMARRON ENERGY - CARLSBAD**  
 4425 GRANDI RD, UNIT F  
 CARLSBAD, NM  
 UM 88220-8923  
 Contact: CARLOS LEAL  
 cleal@cimarron.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)