




# FUEL REPORT

Sample Rating Trend

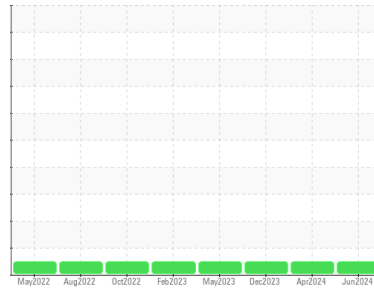

**NORMAL**



Area

MT/VA/Hospital/NOLA

Machine Id

VA HOSPITAL NEW ORLEANS TANK 3

Component

Diesel Fuel

Fluid

No.2 DIESEL FUEL (ULTRALOW SULPHUR) (40000 QTS)

## DIAGNOSIS

### Recommendation

All laboratory tests indicate that this sample meets specifications for No.2 ultra-low-sulfur diesel fuel.

### Corrosion

All metal levels are normal indicating no corrosion in the system.

### Contaminants

There is no bacteria or fungus (yeast and/or mold) indicated in the sample. The water content is negligible. There is no indication of any contamination in the fuel. The amount and size of particulates present in the system are acceptable.

### Fuel Condition

Sulfur value derived by ASTM D5453 method for ULSD validation. Sulfur level is acceptable for ULSD specification.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC06216512</b>	WC06173070	WC06073462
Sample Date	Client Info		<b>13 Jun 2024</b>	01 Apr 2024	13 Dec 2023
Machine Age	hrs	Client Info	<b>0</b>	0	0
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## PHYSICAL PROPERTIES

	method	limit/base	current	history1	history2
Specific Gravity	*ASTM D1298	0.839	---	---	0.837
Fuel Color	text	*Visual Screen	<b>Red</b>	Red	Red
ASTM Color	scalar	*ASTM D1500	<b>L5.5</b>	L4.5	L4.0
Visc @ 40°C	cSt	ASTM D445	<b>2.39</b>	2.33	2.27
Pensky-Martens Flash Point	°C	*PMCC Calculated	<b>61.1</b>	61	---

## SULFUR CONTENT

	method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185m	<b>0</b>	15	0
Sulfur (UVF)	ppm	ASTM D5453	<b>7</b>	7	6

## DISTILLATION

	method	limit/base	current	history1	history2	
Initial Boiling Point	°C	ASTM D86	165	<b>171</b>	171	166
5% Distillation Point	°C	ASTM D86		<b>193</b>	194	190
10% Distill Point	°C	ASTM D86	201	<b>202</b>	202	199
15% Distillation Point	°C	ASTM D86		<b>210</b>	210	207
20% Distill Point	°C	ASTM D86	216	<b>217</b>	217	216
30% Distill Point	°C	ASTM D86	230	<b>231</b>	231	229
40% Distill Point	°C	ASTM D86	243	<b>244</b>	244	243
50% Distill Point	°C	ASTM D86	255	<b>257</b>	257	256
60% Distill Point	°C	ASTM D86	267	<b>271</b>	271	270
70% Distill Point	°C	ASTM D86	280	<b>286</b>	286	285
80% Distill Point	°C	ASTM D86	295	<b>301</b>	301	302
85% Distillation Point	°C	ASTM D86		<b>311</b>	311	311
90% Distill Point	°C	ASTM D86	310	<b>321</b>	321	322
95% Distillation Point	°C	ASTM D86		<b>337</b>	336	338
Final Boiling Point	°C	ASTM D86	341	<b>350</b>	350	346
Distillation Residue	%	ASTM D86	3.0	---	---	1.4
Distillation Loss	%	ASTM D86	3.0	---	---	0.8

## IGNITION QUALITY

	method	limit/base	current	history1	history2
API Gravity	ASTM D7777	37.7	<b>37</b>	37	37.6
Cetane Index	ASTM D4737	<40.0	<b>49</b>	49	48.9


## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	<1.0	<b>0</b>	0
Sodium	ppm	ASTM D5185m	<0.1	<b>2</b>	0
Potassium	ppm	ASTM D5185m	<0.1	<b>3</b>	0
Water	%	ASTM D6304	<0.05	<b>0.003</b>	0.003
ppm Water	ppm	ASTM D6304	<500	<b>37</b>	35
% Gasoline	%	*In-House	<0.50	<b>0.0</b>	0.0
% Biodiesel	%	*In-House	<20.0	<b>0.0</b>	0.0




# FUEL REPORT


Fuel Distillation Curve

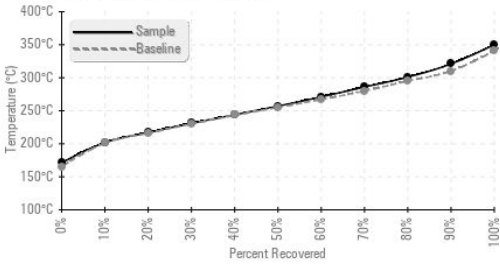


Particle Count

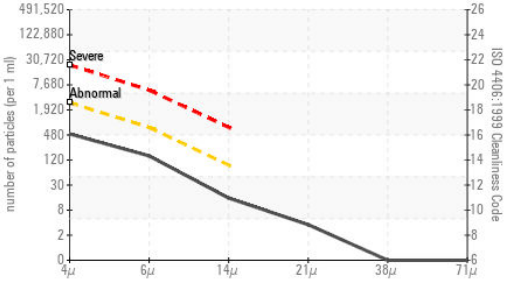


Water (KF)

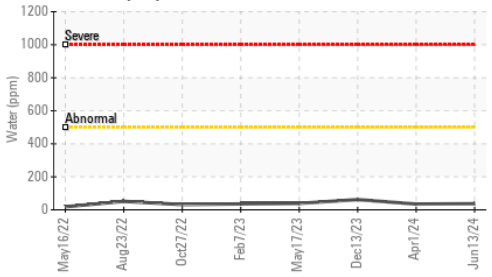

Viscosity @ 40°C

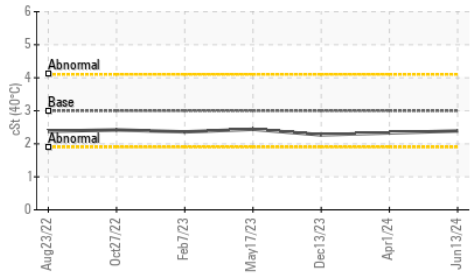


Particle Trend

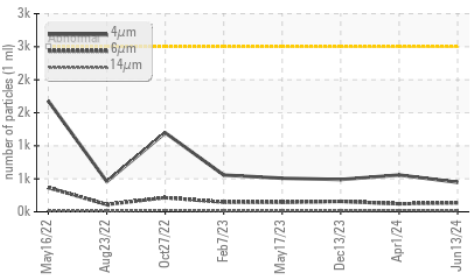

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>2500	<b>447</b>	558	489
Particles >6µm	ASTM D7647	>640	<b>133</b>	121	158
Particles >14µm	ASTM D7647	>80	<b>13</b>	21	16
Particles >21µm	ASTM D7647	>20	<b>3</b>	6	4
Particles >38µm	ASTM D7647	>4	<b>0</b>	0	0
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>18/16/13	<b>16/14/11</b>	16/14/12	16/14/11

HEAVY METALS	method	limit/base	current	history1	history2
Aluminum	ppm	ASTM D5185m <0.1	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m <0.1	<b>0</b>	0	0
Lead	ppm	ASTM D5185m <0.1	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m <0.1	<b>0</b>	0	0
Iron	ppm	ASTM D5185m <0.1	<b>0</b>	0	0
Calcium	ppm	ASTM D5185m <0.1	<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m <0.1	<b>0</b>	0	0
Phosphorus	ppm	ASTM D5185m <0.1	<b>0</b>	0	0
Zinc	ppm	ASTM D5185m <0.1	<b>3</b>	0	0

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

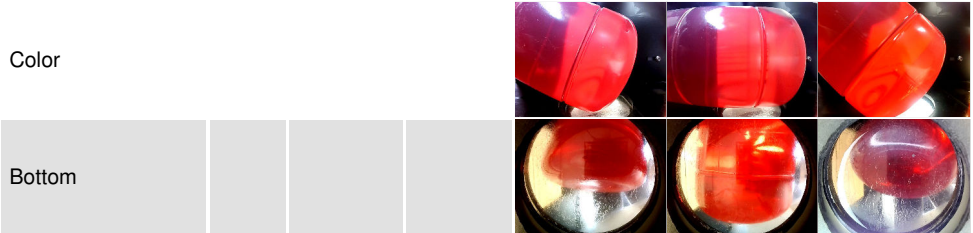

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC06216512 **Received** : 20 Jun 2024  
**Lab Number** : **06216512** **Tested** : 24 Jun 2024  
**Unique Number** : 11089376 **Diagnosed** : 24 Jun 2024 - Jonathan Hester  
**Test Package** : DF-2 ( Additional Tests: Fuel, Screen )

**ISP FUEL SYSTEMS**  
 9 CHRIS COURT, SUITE F  
 DAYTON, NJ  
 US 08810  
 Contact: AJ THOMPSON  
 aj@ispfuelsystems.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)