




FUEL REPORT

Sample Rating Trend

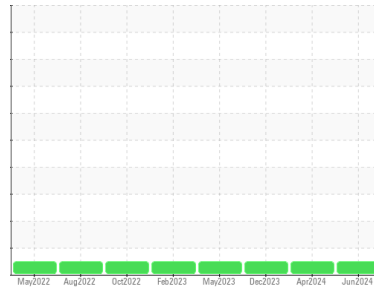

NORMAL



Area

MT/VA/Hospital/NOLA

Machine Id

VA HOSPITAL NEW ORLEANS TANK 6

Component

Diesel Fuel

Fluid

No.2 DIESEL FUEL (ULTRALOW SULPHUR) (--- QTS)

DIAGNOSIS

Recommendation

All laboratory tests indicate that this sample meets specifications for No.2 ultra-low-sulfur diesel fuel.

Corrosion

All metal levels are normal indicating no corrosion in the system.

Contaminants

There is no bacteria or fungus (yeast and/or mold) indicated in the sample. The water content is negligible. There is no indication of any contamination in the fuel. The amount and size of particulates present in the system are acceptable.

Fuel Condition

Sulfur value derived by ASTM D5453 method for ULSD validation. Sulfur level is acceptable for ULSD specification.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC06216513	WC06173072	WC06073464
Sample Date	Client Info		13 Jun 2024	01 Apr 2024	13 Dec 2023
Machine Age	hrs	Client Info	0	0	0
Sample Status			NORMAL	NORMAL	NORMAL

PHYSICAL PROPERTIES

	method	limit/base	current	history1	history2
Specific Gravity	*ASTM D1298	0.839	---	---	0.827
Fuel Color	text	*Visual Screen	Red	Red	Red
ASTM Color	scalar	*ASTM D1500	L5.5	L4.5	L4.0
Visc @ 40°C	cSt	ASTM D445	2.2	2.2	2.27
Pensky-Martens Flash Point	°C	*PMCC Calculated	65.2	64.5	---

SULFUR CONTENT

	method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185m	0	18	0
Sulfur (UVF)	ppm	ASTM D5453	6	6	5

DISTILLATION

	method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D86	177	177	172
5% Distillation Point	°C	ASTM D86	196	196	193
10% Distill Point	°C	ASTM D86	202	203	200
15% Distillation Point	°C	ASTM D86	208	209	206
20% Distill Point	°C	ASTM D86	214	215	212
30% Distill Point	°C	ASTM D86	227	227	224
40% Distill Point	°C	ASTM D86	239	239	237
50% Distill Point	°C	ASTM D86	251	252	250
60% Distill Point	°C	ASTM D86	265	265	264
70% Distill Point	°C	ASTM D86	279	279	278
80% Distill Point	°C	ASTM D86	295	295	294
85% Distillation Point	°C	ASTM D86	305	306	3034
90% Distill Point	°C	ASTM D86	316	317	316
95% Distillation Point	°C	ASTM D86	334	334	333
Final Boiling Point	°C	ASTM D86	349	349	344
Distillation Residue	%	ASTM D86	3.0	---	1.4
Distillation Loss	%	ASTM D86	3.0	---	0.5

IGNITION QUALITY


	method	limit/base	current	history1	history2
API Gravity	ASTM D7777	37.7	39	39	39.6
Cetane Index	ASTM D4737	<40.0	51	51	51.3

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	0	<1	0
Sodium	ppm	ASTM D5185m	2	0	0
Potassium	ppm	ASTM D5185m	2	<1	0
Water	%	ASTM D6304	0.003	0.003	0.005
ppm Water	ppm	ASTM D6304	36	31	59
% Gasoline	%	*In-House	0.0	0.0	0.0
% Biodiesel	%	*In-House	0.0	0.0	0.0




FUEL REPORT

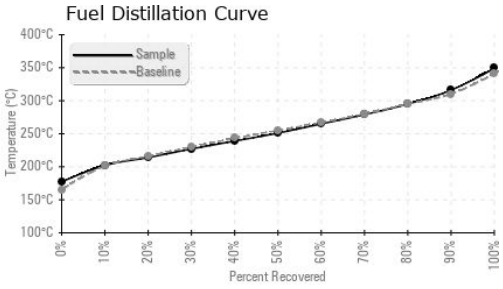




FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>2500	469	544	698
Particles >6µm	ASTM D7647	>640	154	131	242
Particles >14µm	ASTM D7647	>80	18	17	25
Particles >21µm	ASTM D7647	>20	5	5	5
Particles >38µm	ASTM D7647	>4	0	0	0
Particles >71µm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>18/16/13	16/14/11	16/14/11	17/15/12

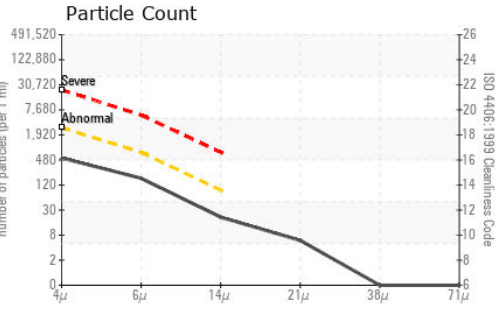

HEAVY METALS	method	limit/base	current	history1	history2
Aluminum	ppm	ASTM D5185m <0.1	0	0	0
Nickel	ppm	ASTM D5185m <0.1	0	0	0
Lead	ppm	ASTM D5185m <0.1	0	0	0
Vanadium	ppm	ASTM D5185m <0.1	0	0	0
Iron	ppm	ASTM D5185m <0.1	0	0	0
Calcium	ppm	ASTM D5185m <0.1	0	0	0
Magnesium	ppm	ASTM D5185m <0.1	0	0	0
Phosphorus	ppm	ASTM D5185m <0.1	0	0	0
Zinc	ppm	ASTM D5185m <0.1	3	0	0

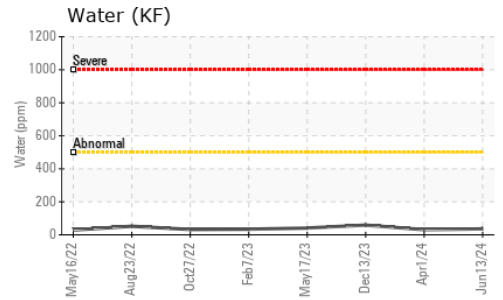

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

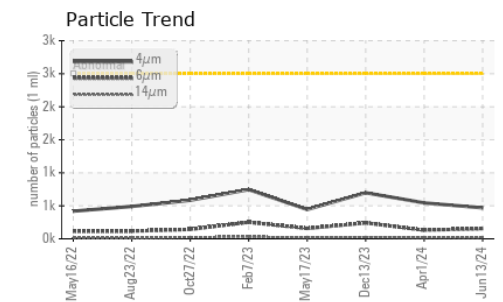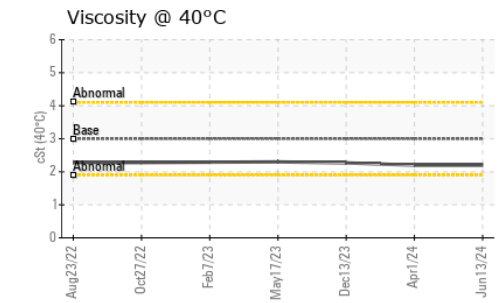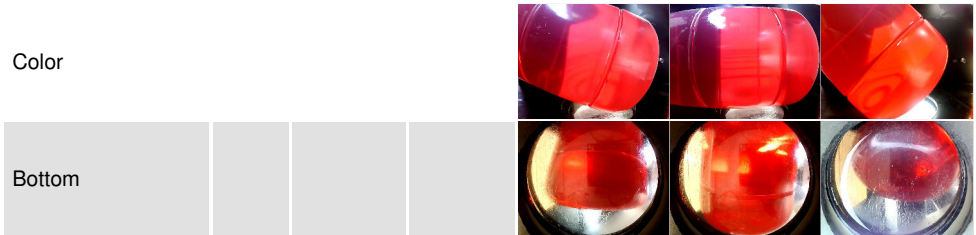

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC06216513
Lab Number : **06216513**
Unique Number : 11089377
Test Package : DF-2 (Additional Tests: Fuel, Screen)
Received : 20 Jun 2024
Tested : 24 Jun 2024
Diagnosed : 24 Jun 2024 - Jonathan Hester

ISP FUEL SYSTEMS
 9 CHRIS COURT, SUITE F
 DAYTON, NJ
 US 08810
 Contact: AJ THOMPSON
 aj@ispfuelsystems.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: