




FUEL REPORT

Sample Rating Trend

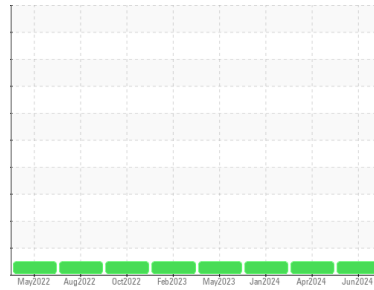

NORMAL



Area

MT/VA/Hospital/NOLA

Machine Id

VA HOSPITAL NEW ORLEANS TANK 4

Component

Diesel Fuel

Fluid

No.2 DIESEL FUEL (ULTRALOW SULPHUR) (40000 QTS)

DIAGNOSIS

Recommendation

All laboratory tests indicate that this sample meets specifications for No.2 ultra-low-sulfur diesel fuel.

Corrosion

All metal levels are normal indicating no corrosion in the system.

Contaminants

There is no bacteria or fungus (yeast and/or mold) indicated in the sample. The water content is negligible. There is no indication of any contamination in the fuel. The amount and size of particulates present in the system are acceptable.

Fuel Condition

Sulfur value derived by ASTM D5453 method for ULSD validation. Sulfur level is acceptable for ULSD specification.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC06216516	WC06173074	WC06073460
Sample Date	Client Info			13 Jun 2024	01 Apr 2024	29 Jan 2024
Machine Age	hrs	Client Info		0	0	0
Sample Status				NORMAL	NORMAL	NORMAL

PHYSICAL PROPERTIES		method	limit/base	current	history1	history2
Specific Gravity		*ASTM D1298	0.839	---	---	0.830
Fuel Color	text	*Visual Screen	Yellow	Red	Red	Red
ASTM Color	scalar	*ASTM D1500		L5.5	L4.5	L4.0
Visc @ 40°C	cSt	ASTM D445	3.0	2.29	2.22	2.24
Pensky-Martens Flash Point	°C	*PMCC Calculated	52	64.4	63.4	---

SULFUR CONTENT		method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185m	10	0	40	0
Sulfur (UVF)	ppm	ASTM D5453		7	7	6

DISTILLATION		method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D86	165	176	175	173
5% Distillation Point	°C	ASTM D86		195	195	193
10% Distill Point	°C	ASTM D86	201	203	202	201
15% Distillation Point	°C	ASTM D86		209	209	206
20% Distill Point	°C	ASTM D86	216	215	215	213
30% Distill Point	°C	ASTM D86	230	227	227	224
40% Distill Point	°C	ASTM D86	243	239	239	237
50% Distill Point	°C	ASTM D86	255	251	251	249
60% Distill Point	°C	ASTM D86	267	265	265	262
70% Distill Point	°C	ASTM D86	280	279	278	277
80% Distill Point	°C	ASTM D86	295	294	294	294
85% Distillation Point	°C	ASTM D86		305	305	304
90% Distill Point	°C	ASTM D86	310	316	316	316
95% Distillation Point	°C	ASTM D86		335	334	334
Final Boiling Point	°C	ASTM D86	341	350	349	345
Distillation Residue	%	ASTM D86	3.0	---	---	1.4
Distillation Loss	%	ASTM D86	3.0	---	---	0.6


IGNITION QUALITY		method	limit/base	current	history1	history2
API Gravity		ASTM D7777	37.7	38	38	39.0
Cetane Index		ASTM D4737	<40.0	50	50	50.1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	<1.0	0	<1	0
Sodium	ppm	ASTM D5185m	<0.1	2	0	0
Potassium	ppm	ASTM D5185m	<0.1	2	<1	0
Water	%	ASTM D6304	<0.05	0.003	0.003	0.005
ppm Water	ppm	ASTM D6304	<500	37	32	56
% Gasoline	%	*In-House	<0.50	0.0	0.0	0.0
% Biodiesel	%	*In-House	<20.0	0.0	0.0	0.0




FUEL REPORT


Fuel Distillation Curve

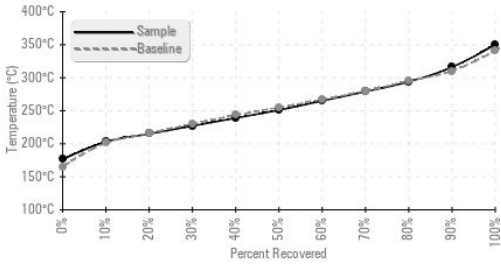


Particle Count

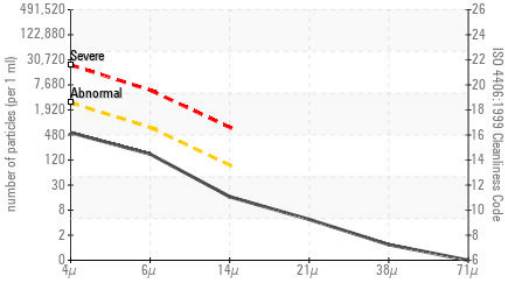


Water (KF)

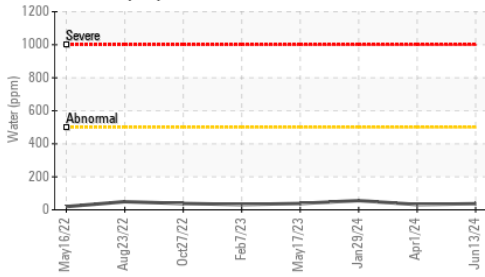

Viscosity @ 40°C

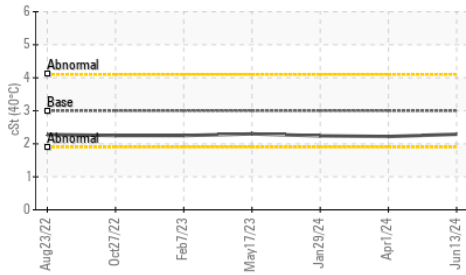


Particle Trend

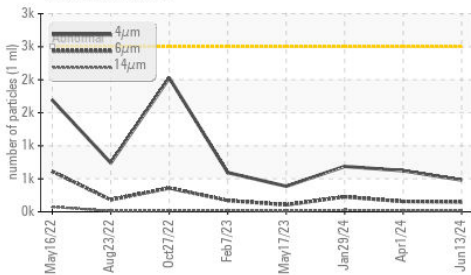

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>2500	481	623	688
Particles >6µm	ASTM D7647	>640	147	156	227
Particles >14µm	ASTM D7647	>80	14	18	27
Particles >21µm	ASTM D7647	>20	4	4	6
Particles >38µm	ASTM D7647	>4	1	0	1
Particles >71µm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>18/16/13	16/14/11	16/14/11	17/15/12

HEAVY METALS	method	limit/base	current	history1	history2
Aluminum	ppm	ASTM D5185m <0.1	0	0	0
Nickel	ppm	ASTM D5185m <0.1	0	0	0
Lead	ppm	ASTM D5185m <0.1	0	0	0
Vanadium	ppm	ASTM D5185m <0.1	0	0	0
Iron	ppm	ASTM D5185m <0.1	0	0	0
Calcium	ppm	ASTM D5185m <0.1	0	<1	0
Magnesium	ppm	ASTM D5185m <0.1	0	0	0
Phosphorus	ppm	ASTM D5185m <0.1	0	<1	0
Zinc	ppm	ASTM D5185m <0.1	3	0	0

SAMPLE IMAGES

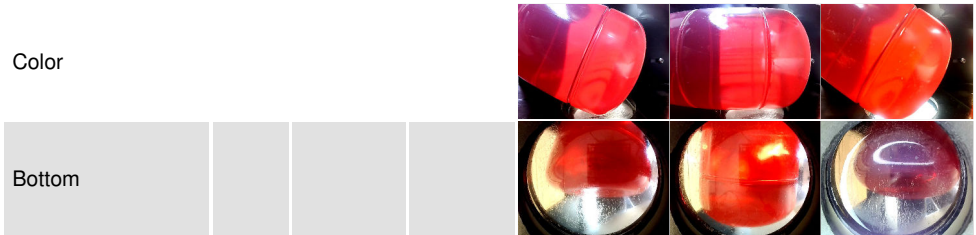

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC06216516
Lab Number : **06216516**
Unique Number : 11089380
Test Package : DF-2 (Additional Tests: Fuel, Screen)

Received : 20 Jun 2024
Tested : 24 Jun 2024
Diagnosed : 24 Jun 2024 - Jonathan Hester

ISP FUEL SYSTEMS
 9 CHRIS COURT, SUITE F
 DAYTON, NJ
 US 08810
 Contact: AJ THOMPSON
 aj@ispfuelsystems.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: