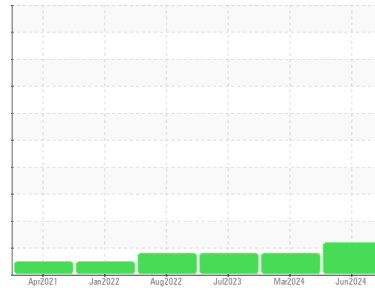


# OIL ANALYSIS REPORT

**Sample Rating Trend**

**VISUAL METAL**


Machine Id  
**JOHN DEERE 410L 1T0410LXJKF358237**  
 Component  
**Diesel Engine**  
 Fluid  
**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- QTS)**

**DIAGNOSIS**
**Recommendation**

No corrective action is recommended at this time. Resample at the next service interval to monitor.

**Wear**

Moderate concentration of visible metal present. All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

**SAMPLE INFORMATION**

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>JR0224979</b>   | JR0211124   | JR0181910   |
| Sample Date   | Client Info |             | <b>14 Jun 2024</b> | 28 Mar 2024 | 31 Jul 2023 |
| Machine Age   | hrs         | Client Info | <b>1958</b>        | 1951        | 1908        |
| Oil Age       | hrs         | Client Info | <b>0</b>           | 500         | 500         |
| Oil Changed   | Client Info |             | <b>Not Chngd</b>   | Changed     | Changed     |
| Sample Status |             |             | <b>ABNORMAL</b>    | ABNORMAL    | ABNORMAL    |

**CONTAMINATION**

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >2.1       | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water  | WC Method | >0.21      | <b>NEG</b>     | NEG      | NEG      |
| Glycol | WC Method |            | <b>NEG</b>     | NEG      | NEG      |

**WEAR METALS**

|          | method | limit/base      | current      | history1 | history2 |
|----------|--------|-----------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >51 | <b>5</b>     | 14       | 12       |
| Chromium | ppm    | ASTM D5185m >11 | <b>&lt;1</b> | <1       | <1       |
| Nickel   | ppm    | ASTM D5185m >5  | <b>0</b>     | 0        | 0        |
| Titanium | ppm    | ASTM D5185m     | <b>&lt;1</b> | 0        | 0        |
| Silver   | ppm    | ASTM D5185m >3  | <b>0</b>     | 0        | 0        |
| Aluminum | ppm    | ASTM D5185m >31 | <b>4</b>     | 6        | 4        |
| Lead     | ppm    | ASTM D5185m >26 | <b>2</b>     | ▲ 28     | ▲ 35     |
| Copper   | ppm    | ASTM D5185m >26 | <b>2</b>     | 3        | 5        |
| Tin      | ppm    | ASTM D5185m >4  | <b>0</b>     | <1       | 1        |
| Vanadium | ppm    | ASTM D5185m     | <b>&lt;1</b> | 0        | 0        |
| Cadmium  | ppm    | ASTM D5185m     | <b>0</b>     | 0        | 0        |

**ADDITIVES**

|            | method | limit/base  | current     | history1 | history2 |
|------------|--------|-------------|-------------|----------|----------|
| Boron      | ppm    | ASTM D5185m | <b>261</b>  | 189      | 209      |
| Barium     | ppm    | ASTM D5185m | <b>0</b>    | <1       | 0        |
| Molybdenum | ppm    | ASTM D5185m | <b>244</b>  | 241      | 257      |
| Manganese  | ppm    | ASTM D5185m | <b>0</b>    | <1       | <1       |
| Magnesium  | ppm    | ASTM D5185m | <b>780</b>  | 836      | 882      |
| Calcium    | ppm    | ASTM D5185m | <b>1393</b> | 1494     | 1499     |
| Phosphorus | ppm    | ASTM D5185m | <b>917</b>  | 842      | 947      |
| Zinc       | ppm    | ASTM D5185m | <b>1099</b> | 1085     | 1181     |
| Sulfur     | ppm    | ASTM D5185m | <b>3201</b> | 3489     | 3786     |

**CONTAMINANTS**

|           | method | limit/base      | current  | history1 | history2 |
|-----------|--------|-----------------|----------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >22 | <b>9</b> | 6        | 8        |
| Sodium    | ppm    | ASTM D5185m >31 | <b>0</b> | 2        | 2        |
| Potassium | ppm    | ASTM D5185m >20 | <b>2</b> | 0        | 1        |

**INFRA-RED**


|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 >3  | <b>0.1</b>  | 0.2      | 0.2      |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>5.8</b>  | 9.1      | 9.1      |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>19.7</b> | 22.8     | 22.9     |

**FLUID DEGRADATION**


|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>14.4</b> | 17.2     | 17.3     |
| Base Number (BN) | mg KOH/g | ASTM D2896 13.6 | <b>10.0</b> | 8.7      | 8.6      |

# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

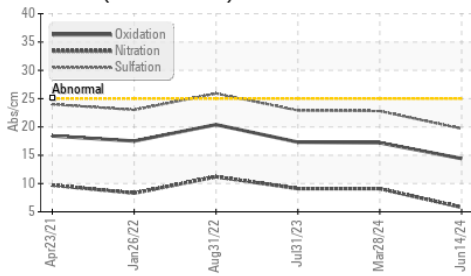

Base Number

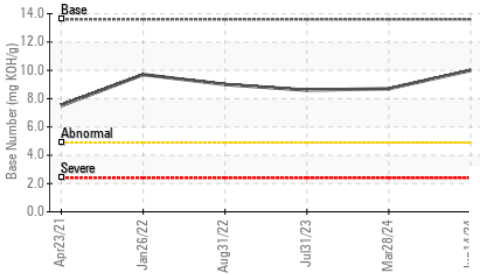

Viscosity @ 100°C

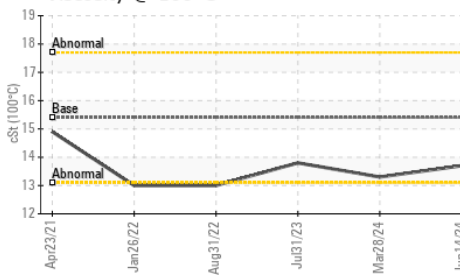


| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | ▲ MODER  | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.21   | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.4    | 13.7     | 13.3     |

## GRAPHS


Ferrous Alloys

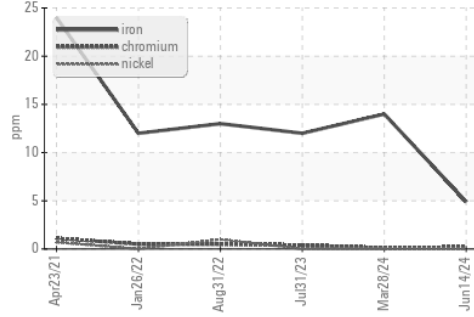


Non-ferrous Metals

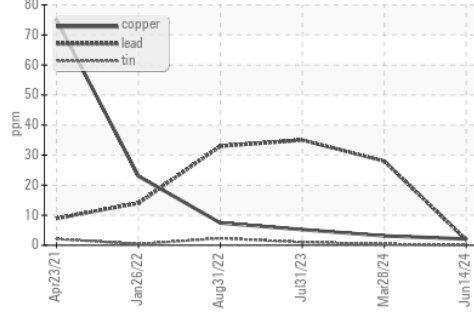

Viscosity @ 100°C

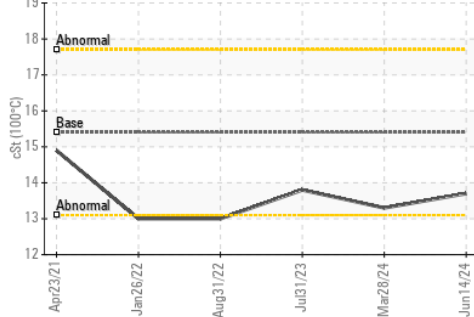

Base Number

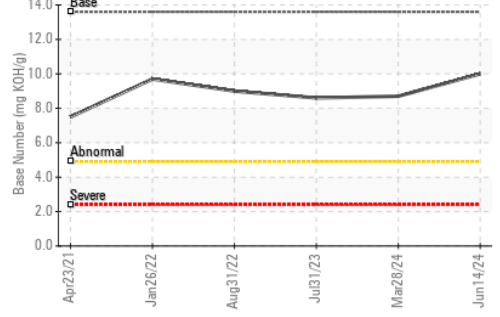

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0224979      **Received** : 21 Jun 2024  
**Lab Number** : 06216559      **Tested** : 24 Jun 2024  
**Unique Number** : 11089423      **Diagnosed** : 24 Jun 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: TBN )

**JRE - ASHLAND**  
 11047 LEADBETTER RD  
 ASHLAND, VA  
 US 23005  
 Contact: DAVID ZIEG  
 dzieg@jamesriverequipment.com  
 T: (804)798-6001  
 F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)