




# OIL ANALYSIS REPORT

## Sample Rating Trend

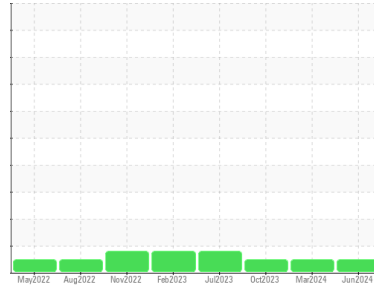

**NORMAL**



Area

[W52514 VEOLIA]

Machine Id

**JOHN DEERE 824L 1DW824LXENL713372**

Component

**Diesel Engine**

Fluid

**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>JR0224940</b>   | JR0199916   | JR0179815   |
| Sample Date   | Client Info |             | <b>18 Jun 2024</b> | 05 Mar 2024 | 23 Oct 2023 |
| Machine Age   | hrs         | Client Info | <b>3507</b>        | 2966        | 2476        |
| Oil Age       | hrs         | Client Info | <b>0</b>           | 0           | 0           |
| Oil Changed   | Client Info |             | <b>Changed</b>     | Changed     | Changed     |
| Sample Status |             |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

### CONTAMINATION

|        | method    | limit/base | current    | history1 | history2 |
|--------|-----------|------------|------------|----------|----------|
| Water  | WC Method | >0.21      | <b>NEG</b> | NEG      | NEG      |
| Glycol | WC Method |            | <b>NEG</b> | NEG      | NEG      |

### WEAR METALS

|          | method | limit/base  | current | history1     | history2 |    |
|----------|--------|-------------|---------|--------------|----------|----|
| Iron     | ppm    | ASTM D5185m | >51     | <b>12</b>    | 10       | 11 |
| Chromium | ppm    | ASTM D5185m | >11     | <b>&lt;1</b> | 0        | 0  |
| Nickel   | ppm    | ASTM D5185m | >5      | <b>3</b>     | 5        | 6  |
| Titanium | ppm    | ASTM D5185m |         | <b>&lt;1</b> | 0        | 0  |
| Silver   | ppm    | ASTM D5185m | >3      | <b>0</b>     | 0        | 0  |
| Aluminum | ppm    | ASTM D5185m | >31     | <b>3</b>     | 5        | 3  |
| Lead     | ppm    | ASTM D5185m | >26     | <b>&lt;1</b> | 0        | 0  |
| Copper   | ppm    | ASTM D5185m | >26     | <b>&lt;1</b> | 0        | <1 |
| Tin      | ppm    | ASTM D5185m | >4      | <b>0</b>     | <1       | 0  |
| Vanadium | ppm    | ASTM D5185m |         | <b>0</b>     | <1       | 0  |
| Cadmium  | ppm    | ASTM D5185m |         | <b>0</b>     | 0        | 0  |

### ADDITIVES

|            | method | limit/base  | current | history1    | history2 |      |
|------------|--------|-------------|---------|-------------|----------|------|
| Boron      | ppm    | ASTM D5185m |         | <b>130</b>  | 243      | 239  |
| Barium     | ppm    | ASTM D5185m |         | <b>0</b>    | 0        | 0    |
| Molybdenum | ppm    | ASTM D5185m |         | <b>175</b>  | 243      | 253  |
| Manganese  | ppm    | ASTM D5185m |         | <b>0</b>    | <1       | <1   |
| Magnesium  | ppm    | ASTM D5185m |         | <b>450</b>  | 813      | 852  |
| Calcium    | ppm    | ASTM D5185m |         | <b>1821</b> | 1330     | 1407 |
| Phosphorus | ppm    | ASTM D5185m |         | <b>993</b>  | 930      | 811  |
| Zinc       | ppm    | ASTM D5185m |         | <b>1195</b> | 1102     | 1114 |
| Sulfur     | ppm    | ASTM D5185m |         | <b>3551</b> | 3131     | 3187 |

### CONTAMINANTS

|           | method | limit/base  | current | history1       | history2 |      |
|-----------|--------|-------------|---------|----------------|----------|------|
| Silicon   | ppm    | ASTM D5185m | >22     | <b>7</b>       | 6        | 7    |
| Sodium    | ppm    | ASTM D5185m | >31     | <b>0</b>       | 2        | 3    |
| Potassium | ppm    | ASTM D5185m | >20     | <b>2</b>       | 2        | 0    |
| Fuel      | %      | ASTM D3524  | >2.1    | <b>&lt;1.0</b> | <1.0     | <1.0 |




### INFRA-RED

|           | method   | limit/base  | current | history1    | history2 |      |
|-----------|----------|-------------|---------|-------------|----------|------|
| Soot %    | %        | *ASTM D7844 | >3      | <b>0.3</b>  | 0.2      | 0.2  |
| Nitration | Abs/cm   | *ASTM D7624 | >20     | <b>8.1</b>  | 7.8      | 7.7  |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30     | <b>19.8</b> | 21.0     | 21.2 |

### FLUID DEGRADATION

|                  | method   | limit/base  | current | history1    | history2 |      |
|------------------|----------|-------------|---------|-------------|----------|------|
| Oxidation        | Abs/.1mm | *ASTM D7414 | >25     | <b>14.0</b> | 15.3     | 15.3 |
| Base Number (BN) | mg KOH/g | ASTM D2896  | 13.6    | <b>7.6</b>  | 9.1      | 9.4  |





# OIL ANALYSIS REPORT

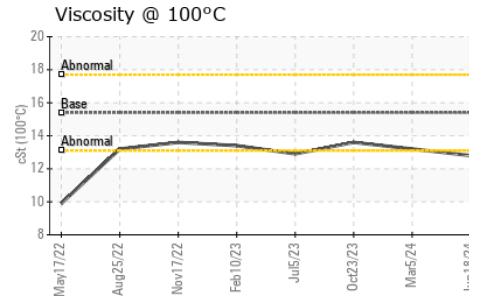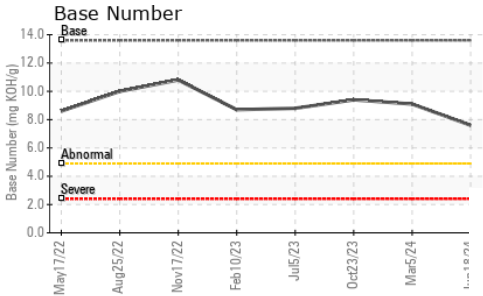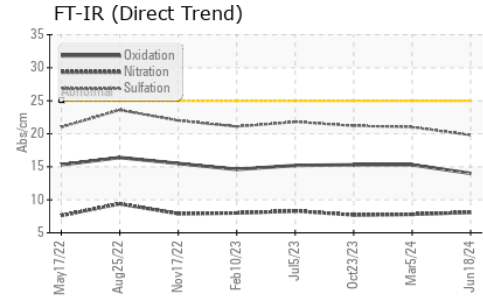

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.21   | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.4    | 12.8     | 13.2     |

## GRAPHS

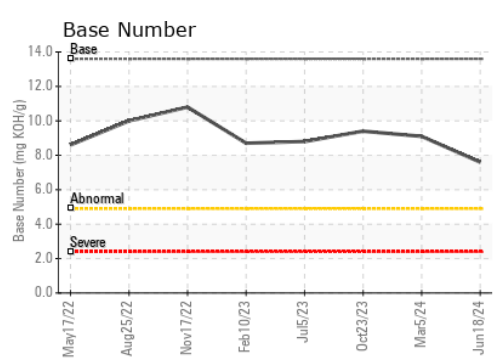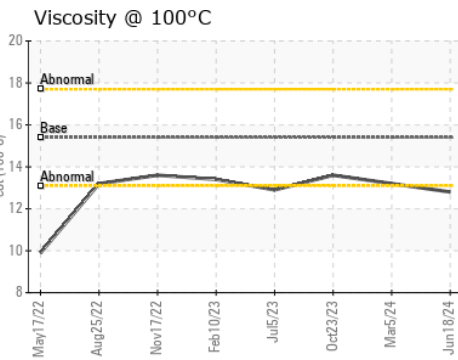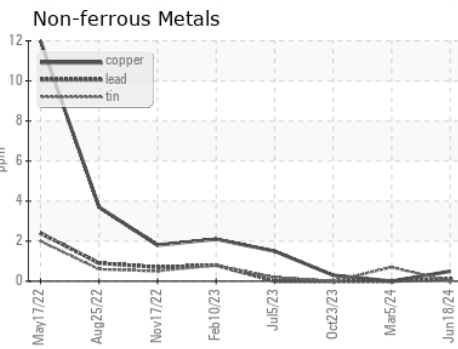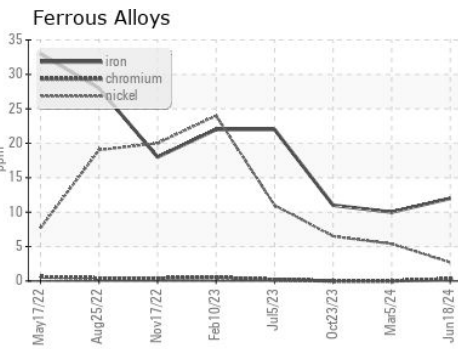

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0224940      **Received** : 21 Jun 2024  
**Lab Number** : 06216560      **Tested** : 24 Jun 2024  
**Unique Number** : 11089424      **Diagnosed** : 24 Jun 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: FuelDilution, TBN )

**JRE - ASHLAND**  
 11047 LEADBETTER RD  
 ASHLAND, VA  
 US 23005  
 Contact: DAVID ZIEG  
 dzieg@jamesriverequipment.com  
 T: (804)798-6001  
 F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)