

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

HITACHI HCMDHD60C0000010

Component Hydraulic System

HITACHI HYDRAULIC SUPER EX 46HN (--- GAL)

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORM | ATION | method | limit/base | current | history1 | history2 |
|---|--|--|---|---|--|--|
| Sample Number | | Client Info | | JR0211407 | | |
| Sample Date | | Client Info | | 20 Jun 2024 | | |
| Machine Age | hrs | Client Info | | 284 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | Not Changd | | |
| Sample Status | | | | NORMAL | | |
| CONTAMINATION | | method | limit/base | current | history1 | history2 |
| Water | | WC Method | >0.1 | NEG | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| PQ | | ASTM D8184 | | 16 | | |
| Iron | ppm | ASTM D5185m | >20 | 2 | | |
| Chromium | ppm | ASTM D5185m | >10 | <1 | | |
| Nickel | ppm | ASTM D5185m | >10 | <1 | | |
| Titanium | ppm | ASTM D5185m | | <1 | | |
| | ppm | ASTM D5185m | | <1 | | |
| Aluminum | ppm | ASTM D5185m | >10 | 3 | | |
| Lead | ppm | ASTM D5185m | >10 | <1 | | |
| Copper | ppm | ASTM D5185m | >75 | 2 | | |
| | ppm | ASTM D5185m | >10 | <1 | | |
| Vanadium | ppm | ASTM D5185m | | <1 | | |
| Cadmium | ppm | ASTM D5185m | | <1 | | |
| | 1-1- | | | | | |
| ADDITIVES | P P | method | limit/base | current | history1 | history2 |
| ADDITIVES Boron | ppm | | limit/base | current 0 | history1 | history2 |
| Boron | | method | limit/base | | | |
| Boron | ppm | method ASTM D5185m | limit/base | 0 | | |
| Boron Barium Molybdenum | ppm ppm | method ASTM D5185m ASTM D5185m | limit/base | 0 2 | | |
| Boron Barium Molybdenum | ppm ppm ppm | method ASTM D5185m ASTM D5185m ASTM D5185m | limit/base | 0 2 <1 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium | ppm ppm ppm ppm | method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | limit/base | 0 2 <1 <1 | | |
| Boron Barium Molybdenum Manganese Magnesium | ppm ppm ppm ppm ppm | method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | limit/base | 0 2 <1 <1 <1 4 549 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc | ppm ppm ppm ppm ppm ppm ppm ppm | method ASTM D5185m | 827 0 | 0 2 <1 <1 <1 4 549 66 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur | ppm ppm ppm ppm ppm ppm | method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 827 | 0 2 <1 <1 <1 4 549 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc | ppm ppm ppm ppm ppm ppm ppm ppm | method ASTM D5185m | 827 0 | 0 2 <1 <1 <1 4 549 66 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS | ppm ppm ppm ppm ppm ppm ppm ppm | method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 827 0 13 limit/base | 0 2 <1 <1 <1 4 549 66 172 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS | ppm ppm ppm ppm ppm ppm ppm ppm | method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 827 0 13 limit/base | 0 2 <1 <1 <1 4 549 66 172 current | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Chosphorus Zinc Sulfur CONTAMINANTS Silicon | ppm ppm ppm ppm ppm ppm ppm ppm | method ASTM D5185m | 827 0 13 limit/base >20 | 0 2 <1 <1 <1 4 549 66 172 current 2 | history1 | history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Chosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium | ppm | method ASTM D5185m | 827 0 13 limit/base >20 | 0 2 <1 <1 <1 4 549 66 172 current 2 0 | history1 | history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium | ppm | method ASTM D5185m | 827 0 13 limit/base >20 | 0 2 <1 <1 <1 4 549 66 172 current 2 0 2 | history1 | history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLINE | ppm | method ASTM D5185m | 827 0 13 limit/base >20 >20 limit/base | 0 2 <1 <1 <1 4 549 66 172 current 2 0 2 2 | history1 history1 | history2 history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLINE Particles >4µm | ppm | method ASTM D5185m | 827 0 13 limit/base >20 >20 limit/base >5000 | 0 2 <1 <1 <1 4 549 66 172 <i>current</i> 2 0 2 <i>current</i> 1205 | history1 history1 | history2 history2 history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLINE Particles >4µm Particles >6µm | ppm | method ASTM D5185m | 827 0 13 limit/base >20 >20 limit/base >5000 >1300 | 0 2 <1 <1 <1 4 549 66 172 <i>current</i> 2 0 2 <i>current</i> 1205 319 | history1 history1 history1 | history2 history2 history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLINE Particles >4µm Particles >14µm | ppm | method ASTM D5185m ASTM D7647 ASTM D7647 | 827 0 13 imit/base >20 >20 imit/base >20 >20 imit/base >20 >20 | 0 2 <1 <1 <1 4 549 66 172 <i>current</i> 2 0 2 0 2 <i>current</i> 1205 319 19 | history1 history1 history1 | history2 history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLINE Particles >4µm Particles >14µm Particles >21µm | ppm | method ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 | 827 0 13 imit/base >20 >20 imit/base >20 >20 >1300 >1300 >160 >40 | 0 2 <1 <1 <1 4 549 66 172 current 2 0 2 2 current 1205 319 19 4 | history1 history1 history1 | history2 history2 history2 |


ISO 4406 (c) >19/17/14

17/15/11

Oil Cleanliness



OIL ANALYSIS REPORT

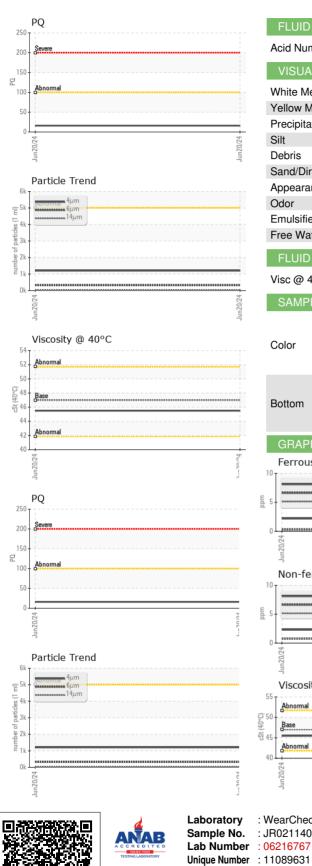

| (| FLUID DEGRAD | | limit/base | current | history1 | history2 |
|-----------------|--------------------------|---------------------|--|----------------|----------|----------------------------|
| (AN) mg KOH/g / | Acid Number (AN) | mg KOH/g ASTM D8045 | | 0.042 | | |
| | VISUAL | method | limit/base | current | history1 | history2 |
| scalar ' | White Metal | scalar *Visual | NONE | NONE | | |
| scalar ' | Yellow Metal | scalar *Visual | NONE | NONE | | |
| scalar | Precipitate | scalar *Visual | NONE | NONE | | |
| | Silt | | NONE | NONE | | |
| | Debris | | NONE | NONE | | |
| | Sand/Dirt | | NONE | NONE | | |
| | Appearance | | NORML | NORML | | |
| | Odor Emulsified Water | | NORML | NORML | | |
| | Free Water | | >0.1 | NEG NEG | | |
| | FLUID PROPER | | limit/base | current | history1 | history2 |
| | Visc @ 40°C | | | 45.5 | | |
| | SAMPLE IMAGE | | limit/base | current | history1 | history2 |
| IAGES | SAMI LE IMAGE | method | iiiiii/base | current | Thistory | TIIStOLYZ |
| | Color | | | | na imaga | na imaga |
| | Color | | | | no image | no image |
| | | | | | | |
| | | | | (CA) | | |
| | Bottom | | | | no image | no image |
| | | | | | | |
| | GRAPHS | | | | | |
| ys | Ferrous Alloys | | 491,520 r | Particle Count | | т2 |
| um | iron | | 122,880 | | | -2 |
| | a. 5 | | | Severe | | |
| | | | 30,720 | 1 | | -2 |
| | | | 47.680 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 | Abnormal | | -2 |
| | Jun20/24 | | Jun20/24 - 1009' (per 1 m) | 1 m 1 | • | -2 -1 -1 -1 -1 |
| 3 Metals | Non-ferrous Meta | ; | 월 480 - | 1 | | |
| 1 | 10 copper | | 120- | | N | +1 |
| | 5- | | -q m 30- | | | -1 |
| 2 | 5 | | 30 | | | |
| ***** | 0 | | 8 | | | |
| | n20/2 ⁴ | | -2/0Zu | | | -8 |
| 1000 | 2 | | | | 14µ 21µ | 38µ 71µ |
| 40°C | 55 _T | | Q 0 08 | Acid Number | | |
| | Abnormal | | By 0.06 | Base | | |
| | Base | | je 0.04 | | | |
| | Abnormal | | 툴 0.02 | | | |
| | 40 | | 30.00 | 24 | | |
| | un20/ | | un20/ | un20) | | |
| 40°C | 40 tormal | Madison Ave., Can | +52002unr 4 (b) 0.08 -52002unr | Acid Number | | <u>з</u> 8µ |

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: DAVID ZIEG - JAMASH

F: (804)798-0292