

## **OIL ANALYSIS REPORT**

Sample Rating Trend

ISO

Machine Id

# VOLVO EC300E 316349

Component Hydraulic System Fluid

{not provided} (--- GAL)

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

#### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		ML0946550		
Sample Date		Client Info		18 Jun 2024		
Machine Age	hrs	Client Info		3710		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Not Changd		
Sample Status				ATTENTION		
CONTAMINATION	N	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>25	6		
Chromium	ppm	ASTM D5185m	>10	3		
Nickel	ppm	ASTM D5185m	>10	<1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		<1		
Aluminum	ppm	ASTM D5185m	>20	3		
Lead	ppm	ASTM D5185m	>20	1		
Copper	ppm	ASTM D5185m	>150	35		
Tin	ppm	ASTM D5185m		<1		
Vanadium	ppm	ASTM D5185m	-	<1		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		1		
Barium	ppm	ASTM D5185m		1		
Molybdenum	ppm	ASTM D5185m		1		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		8		
Calcium	ppm	ASTM D5185m		88		
Phosphorus	ppm	ASTM D5185m		422		
Zinc	ppm	ASTM D5185m		465		
Sulfur	ppm	ASTM D5185m		1208		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	6		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	2		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>40000	<b>49276</b>		
Particles >6µm		ASTM D7647	>10000	<u> </u>		
Particles >14µm		ASTM D7647	>2500	273		
Particles >21µm		ASTM D7647	>640	27		
Particles >38µm		ASTM D7647	>160	1		
Particles >71µm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>22/20/18	23/21/15		
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.52		
:29:04) Rev: 1	Contact/Location: JW MEADOWS - MCCFRE					


Contact/Location: JW MEADOWS - MCCFRE Page 1 of 2




# **OIL ANALYSIS REPORT**

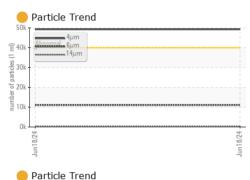



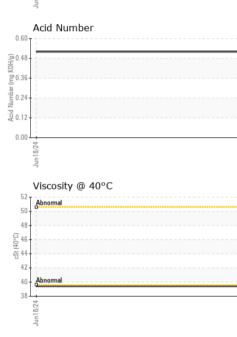

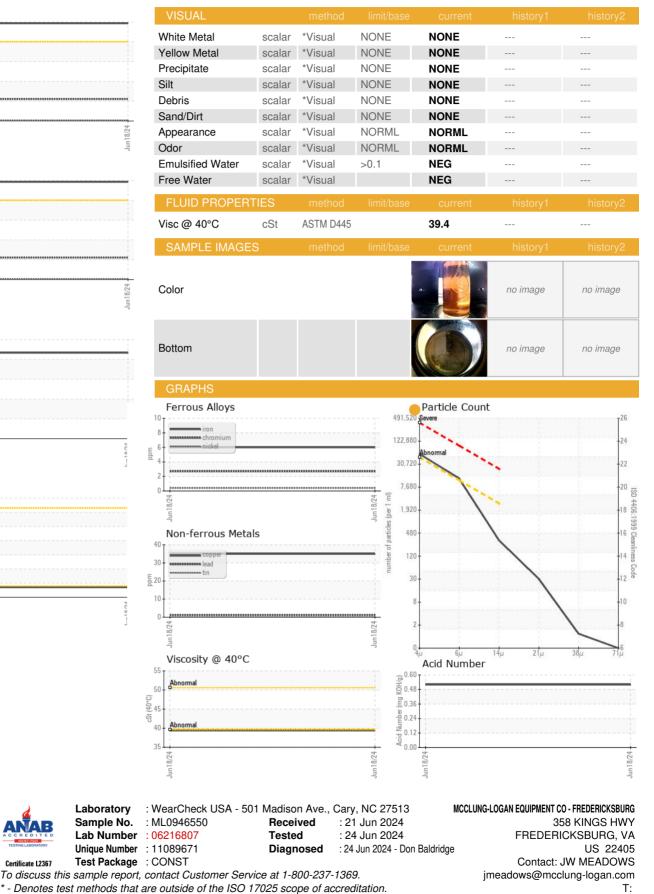

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: MCCFRE [WUSCAR] 06216807 (Generated: 06/24/2024 13:29:04) Rev: 1

Certificate 12367

Laboratory

Sample No.

Contact/Location: JW MEADOWS - MCCFRE

F: