

OIL ANALYSIS REPORT

Sample Rating Trend



Molding PRESS 26 (S/N 61017341)

Hydraulic System Fluid SHELL TELLUS S3 M 46 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

Area

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		ST46744	ST44362	ST40921
Sample Date		Client Info		15 May 2024	01 Dec 2022	09 Dec 2020
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ATTENTION	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<1	<1	<1
Chromium	ppm	ASTM D5185m	>20	<1	0	<1
Nickel	ppm	ASTM D5185m	>20	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>20	3	0	0
Lead	ppm	ASTM D5185m	>20	<1	0	0
Copper	ppm	ASTM D5185m	>20	1	<1	<1
Tin	ppm	ASTM D5185m	>20	<1	0	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	3	1	0	0
Molybdenum	ppm	ASTM D5185m	0	<1	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	0	<1	0	<1
Calcium	ppm	ASTM D5185m	0	34	36	39
Phosphorus	ppm	ASTM D5185m	106	72	66	73
Zinc	ppm	ASTM D5185m	0	10	7	0
Sulfur	ppm	ASTM D5185m		885	965	808
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	0	<1
Sodium	ppm	ASTM D5185m		0	<1	0
Potassium	ppm	ASTM D5185m	>20	1	0	0
Water	%	ASTM D6304	>0.05	0.004	0.003	0.002
ppm Water	ppm	ASTM D6304	>500	46	38.5	16.0
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>640	495	607	611
Particles >6µm		ASTM D7647	>80	29	<u> </u>	39
Particles >14µm		ASTM D7647	>10	1	1 2	4
Particles >21µm		ASTM D7647	>3	0	4	1
Particles >38µm		ASTM D7647	>3	0	0	0
Particles >71µm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>16/13/10	16/12/7	6/14/11	16/12/9
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	Cont	0.14	0.15 Mathan Vanhee	0.150


Report Id: MENWAL [WUSCAR] 06216834 (Generated: 06/25/2024 12:58:23) Rev: 1


Contact/Location: Jonathan Vanbeekum - MENWAL





OIL ANALYSIS REPORT

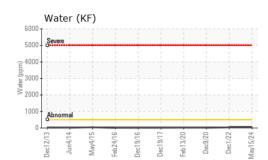


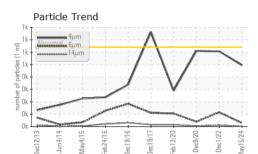








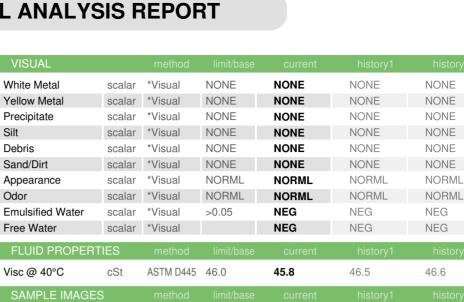


Color

Silt



Bottom

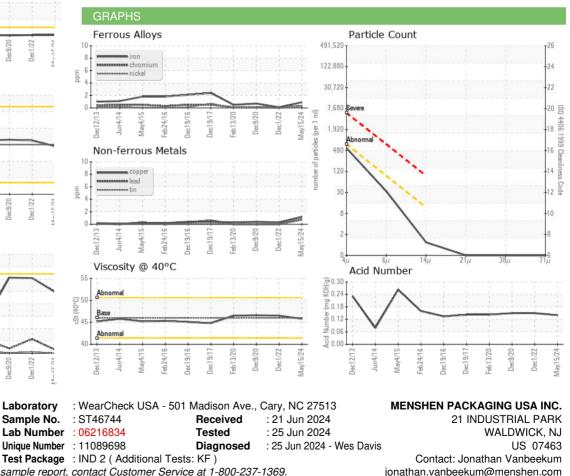

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: MENWAL [WUSCAR] 06216834 (Generated: 06/25/2024 12:58:23) Rev: 1

Certificate 12367

Contact/Location: Jonathan Vanbeekum - MENWAL

T:

F: