




# OIL ANALYSIS REPORT

Sample Rating Trend

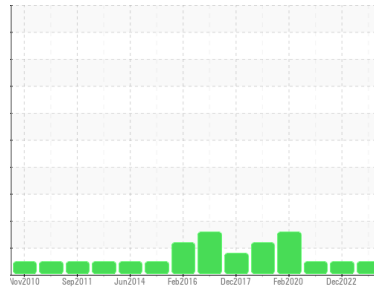

**NORMAL**



Area  
**Molding**  
 Machine Id  
**PRESS 25 (S/N 61011506)**  
 Component  
**Hydraulic System**  
 Fluid  
**SHELL TELLUS S3 M 46 (30 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>ST46743</b>	ST44360	ST40913
Sample Date	Client Info			<b>15 May 2024</b>	01 Dec 2022	09 Dec 2020
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>40	<b>1</b>	<1	1
Chromium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>4	<b>3</b>	<1	0
Lead	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>60	<b>2</b>	<1	<1
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Antimony	ppm	ASTM D5185m		<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	3	<b>1</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	0	<b>19</b>	19	22
Calcium	ppm	ASTM D5185m	0	<b>18</b>	19	18
Phosphorus	ppm	ASTM D5185m	106	<b>174</b>	176	179
Zinc	ppm	ASTM D5185m	0	<b>22</b>	21	11
Sulfur	ppm	ASTM D5185m		<b>3175</b>	3921	3169

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>1</b>	<1	<1
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	3	<1
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	0
Water	%	ASTM D6304	>0.05	<b>0.003</b>	0.003	0.003
ppm Water	ppm	ASTM D6304	>500	<b>39</b>	33.3	29.0

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>640	<b>58</b>	278	192
Particles >6µm		ASTM D7647	>80	<b>9</b>	44	58
Particles >14µm		ASTM D7647	>10	<b>1</b>	4	8
Particles >21µm		ASTM D7647	>3	<b>0</b>	2	3
Particles >38µm		ASTM D7647	>3	<b>0</b>	1	0
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>16/13/10	<b>13/10/7</b>	15/13/9	15/13/10

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.06</b>	0.04	0.165


# OIL ANALYSIS REPORT

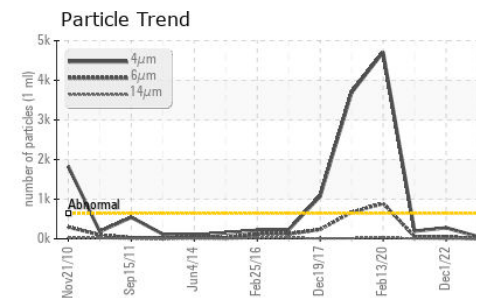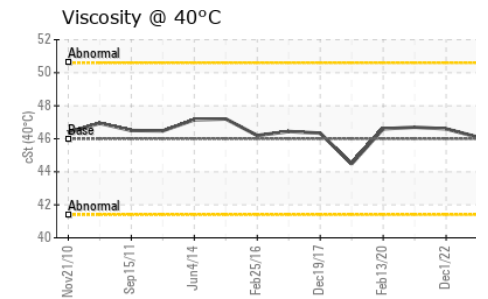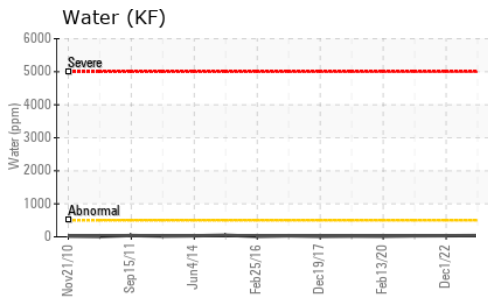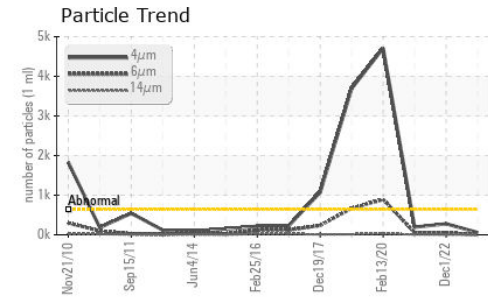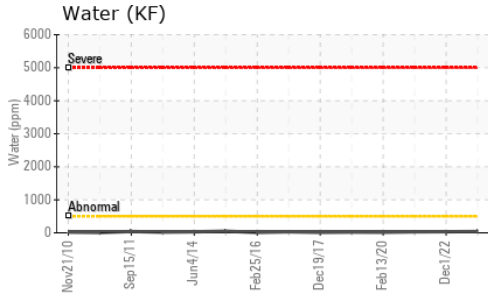






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	46.0	<b>46.1</b>	46.6	46.7

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

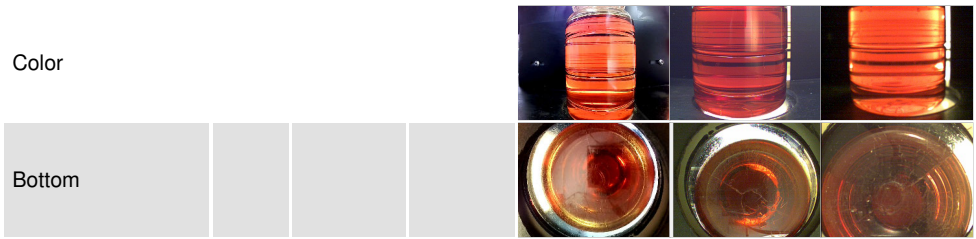

## GRAPHS

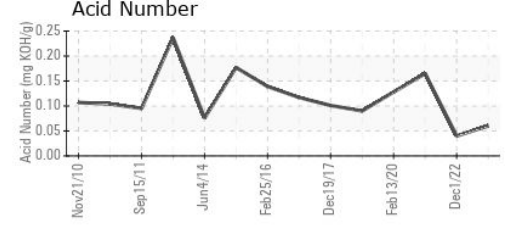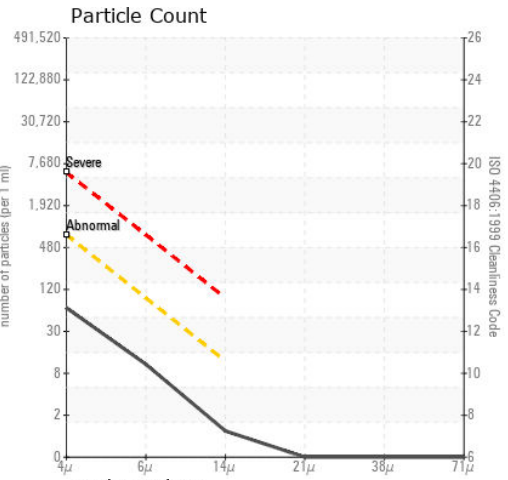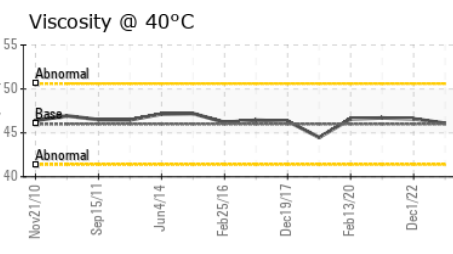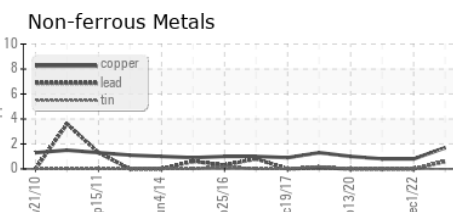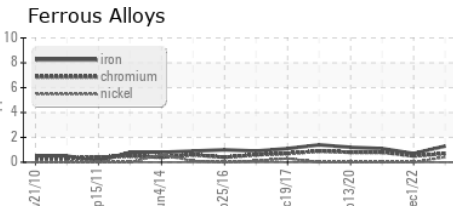

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ST46743  
**Lab Number** : 06216843  
**Unique Number** : 11089707  
**Test Package** : IND 2 ( Additional Tests: KF )  
**Received** : 21 Jun 2024  
**Tested** : 24 Jun 2024  
**Diagnosed** : 24 Jun 2024 - Don Baldrige

**MENSHEM PACKAGING USA INC.**  
 21 INDUSTRIAL PARK  
 WALDWICK, NJ  
 US 07463  
 Contact: Jonathan Vanbeekum  
 jonathan.vanbeekum@menshen.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)