




OIL ANALYSIS REPORT

Sample Rating Trend

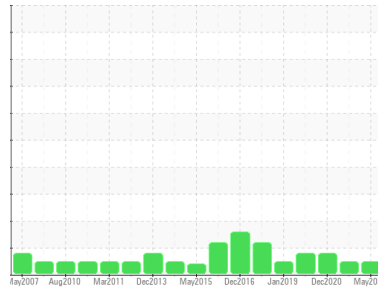

NORMAL



Area
Molding
 Machine Id
PRESS 17 (S/N 114849)
 Component
Hydraulic System
 Fluid
SHELL TELLUS S3 M 46 (91 GAL)

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | ST46813 | ST30410 | ST40893 |
| Sample Date | Client Info | | 15 May 2024 | 01 Dec 2022 | 09 Dec 2020 |
| Machine Age | hrs | Client Info | 0 | 0 | 0 |
| Oil Age | hrs | Client Info | 0 | 0 | 0 |
| Oil Changed | Client Info | | N/A | N/A | N/A |
| Sample Status | | | NORMAL | NORMAL | ATTENTION |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|-----------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >40 | 5 | 5 | 6 |
| Chromium | ppm | ASTM D5185m >4 | <1 | <1 | <1 |
| Nickel | ppm | ASTM D5185m >20 | <1 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | <1 | 0 | 0 |
| Silver | ppm | ASTM D5185m | <1 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m >4 | 3 | 0 | 0 |
| Lead | ppm | ASTM D5185m >10 | <1 | 0 | 0 |
| Copper | ppm | ASTM D5185m >60 | 4 | 3 | 3 |
| Tin | ppm | ASTM D5185m >4 | <1 | 0 | <1 |
| Antimony | ppm | ASTM D5185m | --- | --- | 0 |
| Vanadium | ppm | ASTM D5185m | <1 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | <1 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|-----------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m 0 | 0 | 0 | <1 |
| Barium | ppm | ASTM D5185m 3 | 1 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m 0 | <1 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m 0 | 4 | 2 | 4 |
| Calcium | ppm | ASTM D5185m 0 | 20 | 23 | 23 |
| Phosphorus | ppm | ASTM D5185m 106 | 224 | 220 | 220 |
| Zinc | ppm | ASTM D5185m 0 | 128 | 123 | 122 |
| Sulfur | ppm | ASTM D5185m | 2445 | 2894 | 2243 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|------------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m >20 | 3 | 2 | 2 |
| Sodium | ppm | ASTM D5185m | 0 | 1 | 0 |
| Potassium | ppm | ASTM D5185m >20 | 1 | 0 | 0 |
| Water | % | ASTM D6304 >0.05 | 0.005 | 0.005 | 0.005 |
| ppm Water | ppm | ASTM D6304 >500 | 58 | 58.9 | 56.1 |






FLUID CLEANLINESS

| | method | limit/base | current | history1 | history2 |
|-----------------|--------------|------------|----------------|----------|----------|
| Particles >4µm | ASTM D7647 | >640 | 114 | 386 | 532 |
| Particles >6µm | ASTM D7647 | >80 | 18 | 49 | 110 |
| Particles >14µm | ASTM D7647 | >10 | 2 | 5 | 11 |
| Particles >21µm | ASTM D7647 | >3 | 0 | 1 | 3 |
| Particles >38µm | ASTM D7647 | >3 | 0 | 0 | 0 |
| Particles >71µm | ASTM D7647 | >3 | 0 | 0 | 0 |
| Oil Cleanliness | ISO 4406 (c) | >16/13/10 | 14/11/9 | 16/13/10 | 16/14/11 |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.32 | 0.30 | 0.278 |


OIL ANALYSIS REPORT

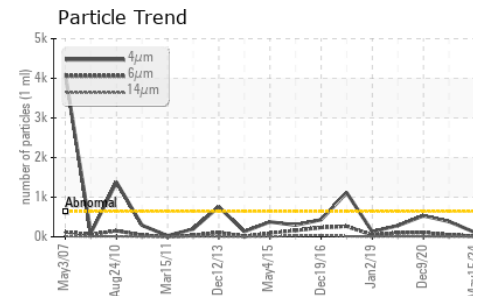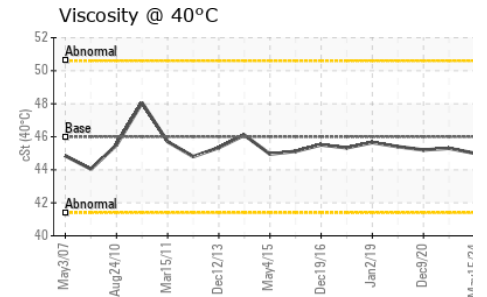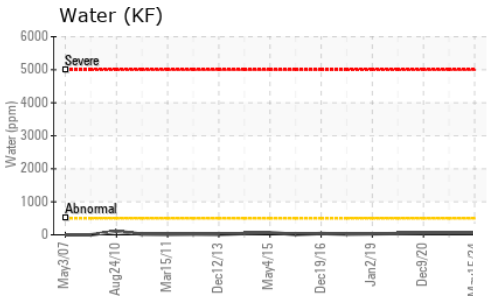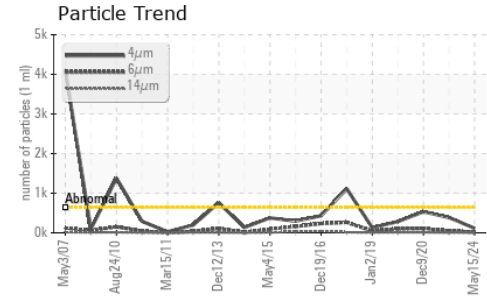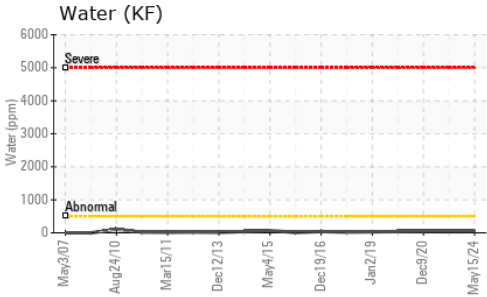






| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.05 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 | 46.0 | 45.0 | 45.3 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

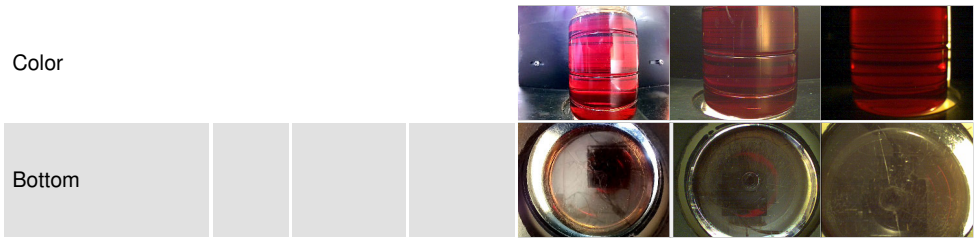

GRAPHS

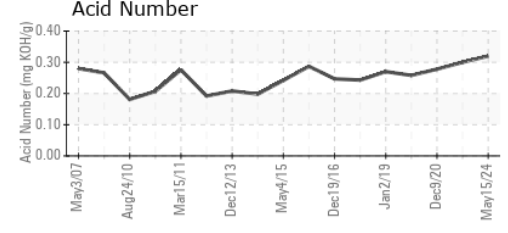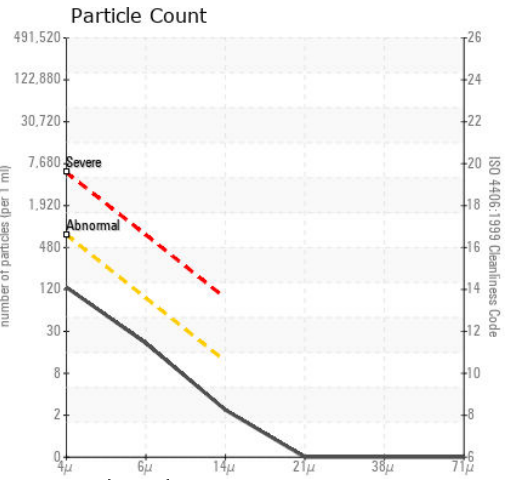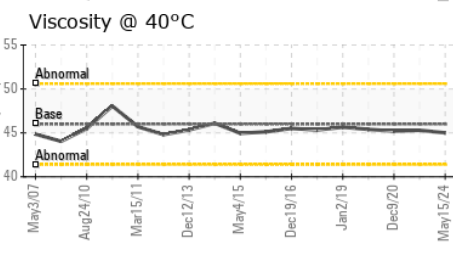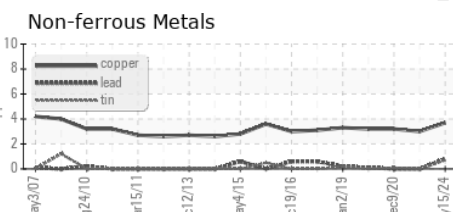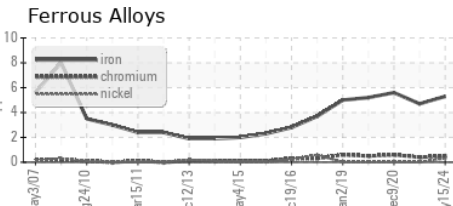

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ST46813
Lab Number : 06216849
Unique Number : 11089713
Test Package : IND 2 (Additional Tests: KF)
Received : 21 Jun 2024
Tested : 24 Jun 2024
Diagnosed : 24 Jun 2024 - Don Baldrige

MENSHEN PACKAGING USA INC.
 21 INDUSTRIAL PARK
 WALDWICK, NJ
 US 07463
 Contact: Jonathan Vanbeekum
 jonathan.vanbeekum@menshen.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)