

OIL ANALYSIS REPORT

KAESER SM 15 5393827 (S/N 1467)

Machine Id

Component Compressor Fluid KAESER SIGMA (OEM) S-460 (--- LTR)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. We recommend an early resample to monitor this condition.

A Wear

The copper level is abnormal. All other component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC06216895	KC05975746	KC05869479
Sample Date		Client Info		10 May 2024	28 Sep 2023	25 May 2023
Machine Age	hrs	Client Info		64043	59646	57085
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	0	<1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	<1	0	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>10	3	0	0
Lead	ppm	ASTM D5185m	>10	<1	0	0
Copper	ppm	ASTM D5185m	>50	<u> </u>	28	5 9
Tin	ppm	ASTM D5185m	>10	<1	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	1	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m	90	11	45	18
Calcium	ppm	ASTM D5185m	2	0	3	0
Phosphorus	ppm	ASTM D5185m		4	2	4
Zinc	ppm	ASTM D5185m		93	81	55
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	1	0	0
Sodium	ppm	ASTM D5185m		2	19	8
Potassium	ppm	ASTM D5185m	>20	2	2	<1
Water	%	ASTM D6304	>0.05	0.010	0.020	0.007
ppm Water	ppm	ASTM D6304	>500	107	206.9	73.0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		137	130284	3166
Particles >6µm		ASTM D7647	>1300	45	68780	837
Particles >14µm		ASTM D7647	>80	4	12226	70
Particles >21µm		ASTM D7647	>20	1	▲ 3847	11
Particles >38µm		ASTM D7647	>4	0	1 75	1
Particles >71µm		ASTM D7647	>3	0	1 1	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	14/13/9	▲ 24/23/21	19/17/13
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2


Sample Rating Trend


WEAR





OIL ANALYSIS REPORT

















VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	45.4	45.2	44.5
SAMPLE IMAGES m		method	limit/base	current	history1	history2
Color						



Bottom

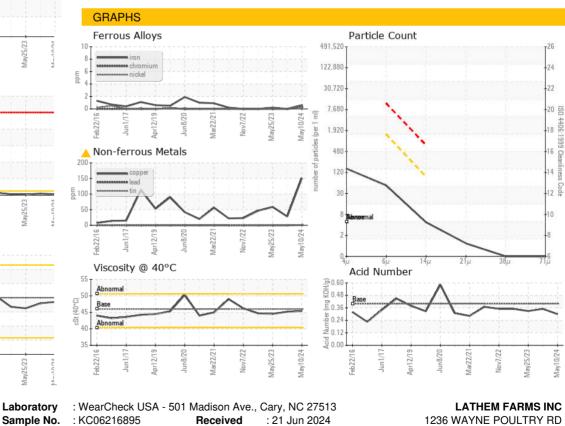

: 24 Jun 2024

: 24 Jun 2024 - Don Baldridge

1236 WAYNE POULTRY RD PENDERGRASS, GA US 30549 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Lab Number : 06216895

Unique Number : 11089759

Test Package : IND 2

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Tested

Diagnosed

Certificate 12367

Contact/Location: ? ? - LATPEN Page 2 of 2

Т: F: