

## **OIL ANALYSIS REPORT**

Sample Rating Trend



Machine Id

# 8818939 (S/N 1549)

### Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

#### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


| SAMPLE INFORM   | NATION | method       | limit/base | current     | history1 | history2 |
|-----------------|--------|--------------|------------|-------------|----------|----------|
| Sample Number   |        | Client Info  |            | KCPA019283  |          |          |
| Sample Date     |        | Client Info  |            | 12 Jun 2024 |          |          |
| Machine Age     | hrs    | Client Info  |            | 1512        |          |          |
| Oil Age         | hrs    | Client Info  |            | 1512        |          |          |
| Oil Changed     |        | Client Info  |            | Changed     |          |          |
| Sample Status   |        |              |            | NORMAL      |          |          |
| WEAR METALS     |        | method       | limit/base | current     | history1 | history2 |
| Iron            | ppm    | ASTM D5185m  | >50        | <1          |          |          |
| Chromium        | ppm    | ASTM D5185m  | >10        | <1          |          |          |
| Nickel          | ppm    | ASTM D5185m  | >3         | <1          |          |          |
| Titanium        | ppm    | ASTM D5185m  | >3         | <1          |          |          |
| Silver          | ppm    | ASTM D5185m  | >2         | <1          |          |          |
| Aluminum        | ppm    | ASTM D5185m  | >10        | 3           |          |          |
| Lead            | ppm    | ASTM D5185m  | >10        | <1          |          |          |
| Copper          | ppm    | ASTM D5185m  | >50        | 13          |          |          |
| Tin             | ppm    | ASTM D5185m  | >10        | <1          |          |          |
| Vanadium        | ppm    | ASTM D5185m  | 210        | <1          |          |          |
| Cadmium         | ppm    | ASTM D5185m  |            | <1          |          |          |
| ADDITIVES       |        | method       | limit/base | current     | history1 | history2 |
| Boron           | ppm    | ASTM D5185m  | 0          | 0           |          |          |
| Barium          | ppm    | ASTM D5185m  | 90         | 1           |          |          |
| Molybdenum      | ppm    | ASTM D5185m  | 0          | <1          |          |          |
| Manganese       | ppm    | ASTM D5185m  |            | <1          |          |          |
| Magnesium       | ppm    | ASTM D5185m  | 100        | 15          |          |          |
| Calcium         | ppm    | ASTM D5185m  | 0          | 0           |          |          |
| Phosphorus      | ppm    | ASTM D5185m  | 0          | 5           |          |          |
| Zinc            | ppm    | ASTM D5185m  |            | 28          |          |          |
| Sulfur          | ppm    | ASTM D5185m  | 23500      | 19279       |          |          |
| CONTAMINANTS    |        | method       | limit/base | current     | history1 | history2 |
| Silicon         | ppm    | ASTM D5185m  | >25        | <1          |          |          |
| Sodium          | ppm    | ASTM D5185m  |            | 2           |          |          |
| Potassium       | ppm    | ASTM D5185m  | >20        | 6           |          |          |
| Water           | %      | ASTM D6304   | >0.05      | 0.029       |          |          |
| ppm Water       | ppm    | ASTM D6304   | >500       | 293         |          |          |
| FLUID CLEANLIN  | IESS   | method       | limit/base | current     | history1 | history2 |
| Particles >4µm  |        | ASTM D7647   |            | 1393        |          |          |
| Particles >6µm  |        | ASTM D7647   | >1300      | 480         |          |          |
| Particles >14µm |        | ASTM D7647   | >80        | 37          |          |          |
| Particles >21µm |        | ASTM D7647   | >20        | 9           |          |          |
| Particles >38µm |        | ASTM D7647   | >4         | 0           |          |          |
| Particles >71µm |        | ASTM D7647   | >3         | 0           |          |          |
| Oil Cleanliness |        | ISO 4406 (c) | >/17/13    | 18/16/12    |          |          |
| FLUID DEGRADA   |        | method       | limit/base | current     | history1 | history2 |
|                 |        | ASTM D8045   |            | 0.33        |          |          |



# **OIL ANALYSIS REPORT**

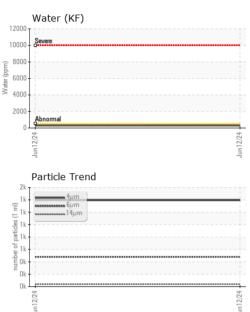

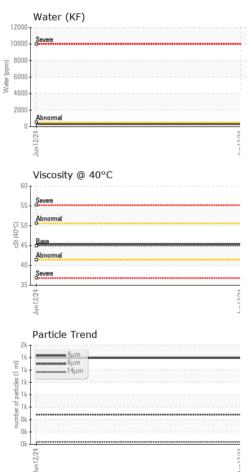

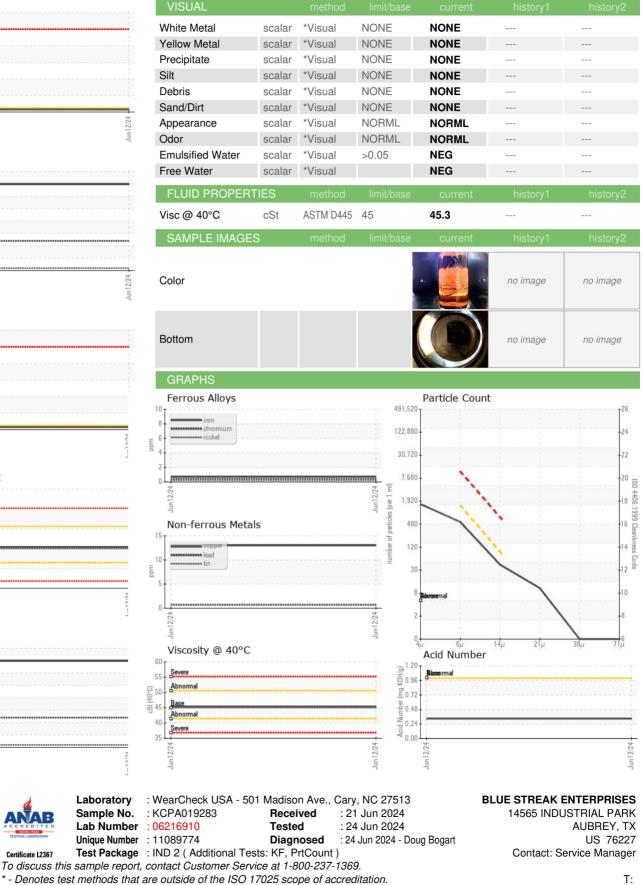

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate 12367

Contact/Location: Service Manager - BLUAUB Page 2 of 2

F: