


PROBLEM SUMMARY

Sample Rating Trend




DEGRADATION

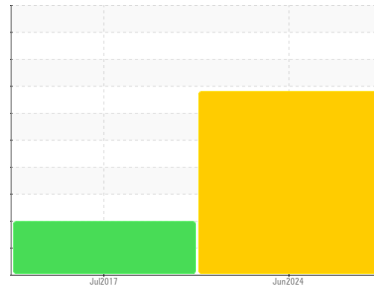

Machine Id
KAESER ESD 300 1572636 (S/N 1002)
Component
Compressor
Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

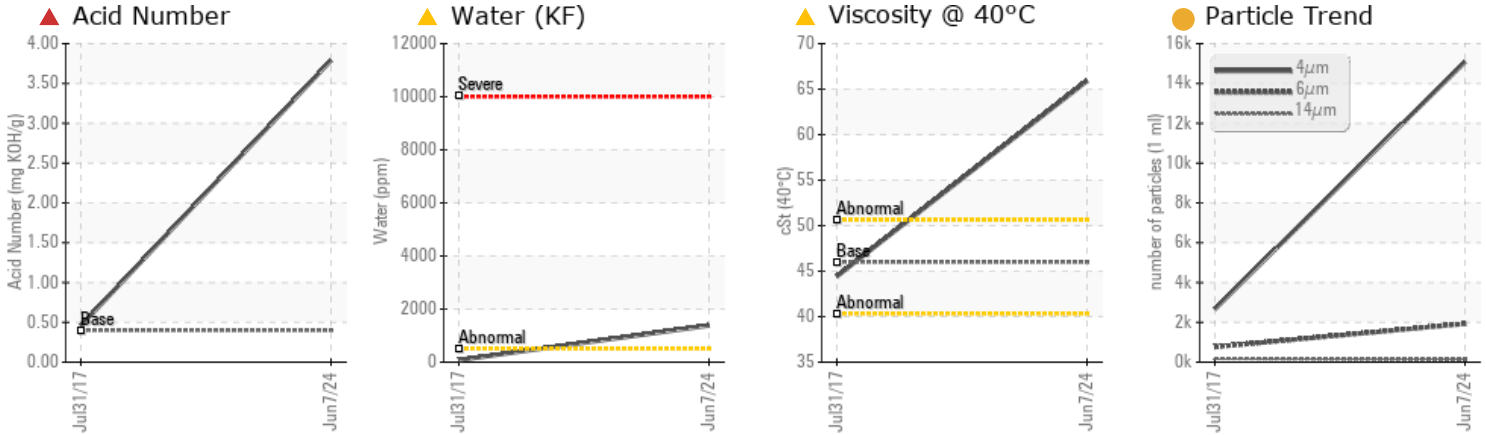

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	ABNORMAL	---
Water	%	ASTM D6304	>0.05	▲ 0.137	0.008	---
ppm Water	ppm	ASTM D6304	>500	▲ 1380	80	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	▲ 3.79	0.459	---
Visc @ 40°C	cSt	ASTM D445	46	▲ 65.9	44.43	---

Customer Id: HONRICKC
Sample No.: KCPA018835
Lab Number: 06216938
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.

HISTORICAL DIAGNOSIS

ISO



31 Jul 2017 Diag: Don Baldrige

We recommend you service the filters on this component. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

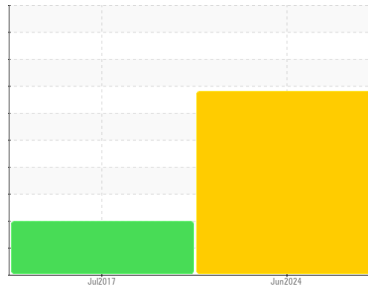

DEGRADATION



Machine Id
KAESER ESD 300 1572636 (S/N 1002)
 Component
Compressor
 Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

▲ Contamination

There is a moderate amount of particulates present in the oil. There is a light concentration of water present in the oil.

▲ Fluid Condition

The AN level is above the recommended limit. The oil viscosity is higher than normal. The oil is no longer serviceable.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KCPA018835	KCP04778	---
Sample Date	Client Info		07 Jun 2024	31 Jul 2017	---
Machine Age	hrs	Client Info	0	17060	---
Oil Age	hrs	Client Info	0	3000	---
Oil Changed	Client Info		Changed	Not Changd	---
Sample Status			SEVERE	ABNORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	8	<1	---
Chromium	ppm	ASTM D5185m >10	<1	0	---
Nickel	ppm	ASTM D5185m >3	<1	0	---
Titanium	ppm	ASTM D5185m >3	<1	0	---
Silver	ppm	ASTM D5185m >2	<1	0	---
Aluminum	ppm	ASTM D5185m >10	5	0	---
Lead	ppm	ASTM D5185m >10	<1	0	---
Copper	ppm	ASTM D5185m >50	4	9	---
Tin	ppm	ASTM D5185m >10	<1	0	---
Antimony	ppm	ASTM D5185m	---	0	---
Vanadium	ppm	ASTM D5185m	<1	0	---
Cadmium	ppm	ASTM D5185m	<1	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<1	0	---
Barium	ppm	ASTM D5185m 90	2	0	---
Molybdenum	ppm	ASTM D5185m	<1	0	---
Manganese	ppm	ASTM D5185m	<1	<1	---
Magnesium	ppm	ASTM D5185m 90	4	0	---
Calcium	ppm	ASTM D5185m 2	0	0	---
Phosphorus	ppm	ASTM D5185m	6	0	---
Zinc	ppm	ASTM D5185m	88	<1	---
Sulfur	ppm	ASTM D5185m	824	10287	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	4	<1	---
Sodium	ppm	ASTM D5185m	13	<1	---
Potassium	ppm	ASTM D5185m >20	8	<1	---
Water	%	ASTM D6304 >0.05	▲ 0.137	0.008	---
ppm Water	ppm	ASTM D6304 >500	▲ 1380	80	---






FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		15085	2667	---
Particles >6µm	ASTM D7647 >1300		● 1927	764	---
Particles >14µm	ASTM D7647 >80		● 121	▲ 187	---
Particles >21µm	ASTM D7647 >20		● 32	▲ 88	---
Particles >38µm	ASTM D7647 >4		1	▲ 18	---
Particles >71µm	ASTM D7647 >3		0	▲ 4	---
Oil Cleanliness	ISO 4406 (c) >--/17/13		● 21/18/14	▲ 17/15	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.4	▲ 3.79	0.459	---


OIL ANALYSIS REPORT

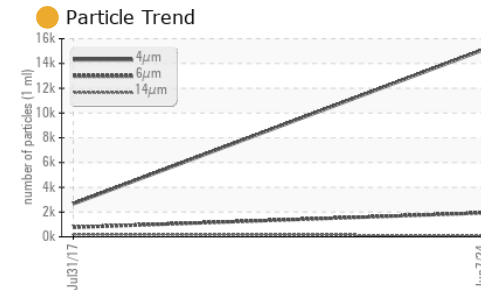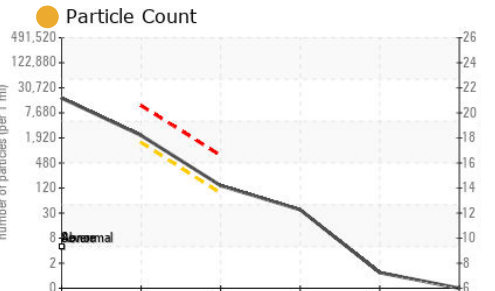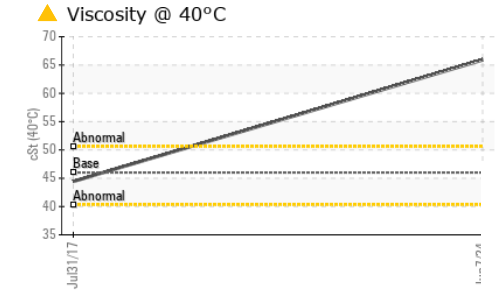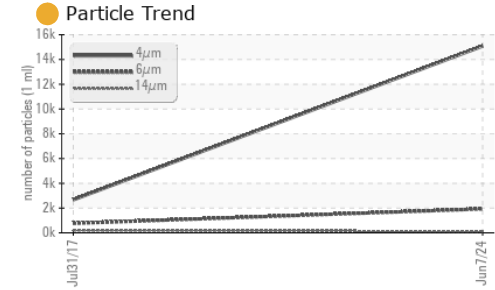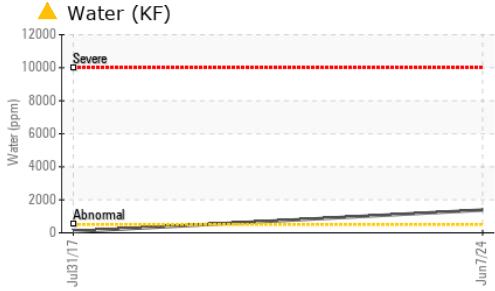






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	▲ 65.9	44.43	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

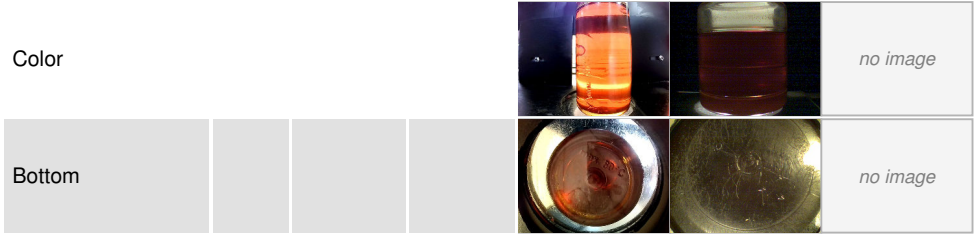

GRAPHS

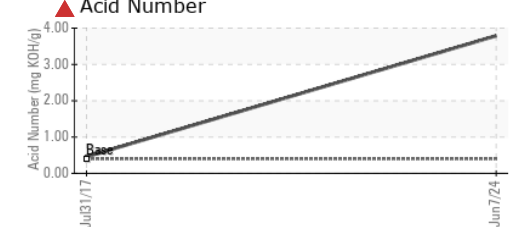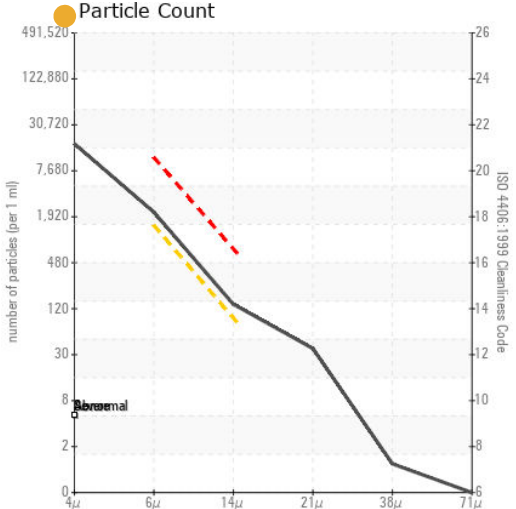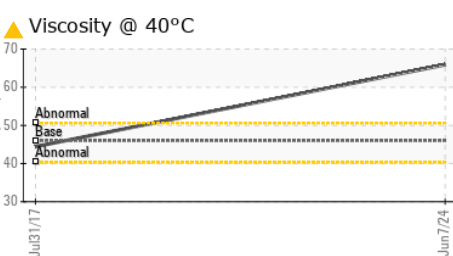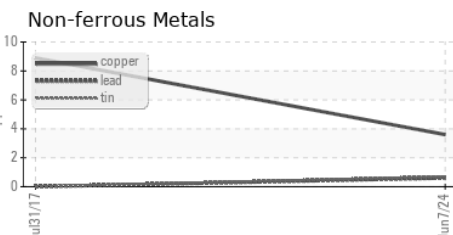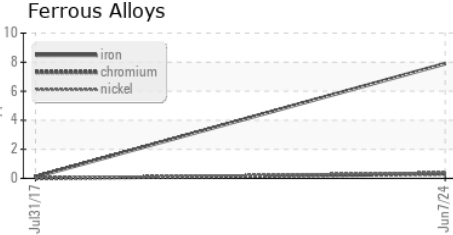

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA018835 **Received** : 21 Jun 2024
Lab Number : 06216938 **Tested** : 24 Jun 2024
Unique Number : 11089802 **Diagnosed** : 24 Jun 2024 - Don Baldrige
Test Package : IND 2 (Additional Tests: KF, PrtCount)

HONEYWELL
 830 E ARAPHO RD
 RICHARDSON, TX
 US 75081
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: