

# **OIL ANALYSIS REPORT**

Sample Rating Trend



Machine Id

# R&M DD-5-29 C0144 (S/N 1695709506)

Hoisting Gearbox

Fluid

{not provided} (--- GAL)

### DIAGNOSIS

## Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

#### Wear

All component wear rates are normal.

# Contamination

There is no indication of any contamination in the oil


## Fluid Condition

The condition of the oil is acceptable for the time in service


|                  |        |             | Мау2023    | Jun2024     |             | •        |
|------------------|--------|-------------|------------|-------------|-------------|----------|
| SAMPLE INFORM    | MATION | method      | limit/base | current     | history1    | history2 |
| Sample Number    |        | Client Info |            | DC0036840   | DC0029168   |          |
| Sample Date      |        | Client Info |            | 06 Jun 2024 | 30 May 2023 |          |
| Machine Age      | hrs    | Client Info |            | 0           | 0           |          |
| Oil Age          | hrs    | Client Info |            | 0           | 0           |          |
| Oil Changed      | 0      | Client Info |            | N/A         | Not Changd  |          |
| Sample Status    |        |             |            | NORMAL      | NORMAL      |          |
| CONTAMINATION    | ٧      | method      | limit/base | current     | history1    | history2 |
| Water            |        | WC Method   | >0.2       | NEG         | NEG         |          |
| WEAR METALS      |        | method      | limit/base | current     | history1    | history2 |
| ron              | ppm    | ASTM D5185m | >200       | 4           | 14          |          |
| Chromium         | ppm    | ASTM D5185m | >10        | 0           | 0           |          |
| lickel           | ppm    | ASTM D5185m | >10        | <1          | 0           |          |
| itanium          | ppm    | ASTM D5185m |            | 0           | <1          |          |
| Silver           | ppm    | ASTM D5185m |            | 0           | 0           |          |
| Aluminum         | ppm    | ASTM D5185m |            | <1          | 0           |          |
| _ead             | ppm    | ASTM D5185m |            | 1           | 0           |          |
| Copper           | ppm    | ASTM D5185m |            | 2           | <1          |          |
| in               | ppm    | ASTM D5185m |            | <1          | 0           |          |
| /anadium         | ppm    | ASTM D5185m |            | 0           | <1          |          |
| Cadmium          | ppm    | ASTM D5185m |            | 0           | 0           |          |
| ADDITIVES        |        | method      | limit/base | current     | history1    | history2 |
| Boron            | ppm    | ASTM D5185m |            | <1          | 0           |          |
| Barium           | ppm    | ASTM D5185m |            | 0           | 0           |          |
| Nolybdenum       | ppm    | ASTM D5185m |            | 0           | 0           |          |
| Manganese        | ppm    | ASTM D5185m |            | 1           | <1          |          |
| /lagnesium       | ppm    | ASTM D5185m |            | 12          | <1          |          |
| Calcium          | ppm    | ASTM D5185m |            | 19          | 165         |          |
| Phosphorus       | ppm    | ASTM D5185m |            | 658         | 461         |          |
| inc '            | ppm    | ASTM D5185m |            | 694         | 565         |          |
| Sulfur           | ppm    | ASTM D5185m |            | 13741       | 15586       |          |
| CONTAMINANTS     |        | method      | limit/base | current     | history1    | history2 |
| Silicon          | ppm    | ASTM D5185m |            | 1           | 2           |          |
| Sodium           | ppm    | ASTM D5185m |            | 3           | 2           |          |
| Potassium        | ppm    | ASTM D5185m | >20        | 3           | 0           |          |
| VISUAL           |        | method      | limit/base | current     | history1    | history2 |
| White Metal      | scalar | *Visual     | NONE       | NONE        | NONE        |          |
| ellow Metal      | scalar | *Visual     | NONE       | NONE        | NONE        |          |
| Precipitate      | scalar | *Visual     | NONE       | NONE        | NONE        |          |
| Silt             | scalar | *Visual     | NONE       | NONE        | NONE        |          |
| Debris           | scalar | *Visual     | NONE       | NONE        | NONE        |          |
| Sand/Dirt        | scalar | *Visual     | NONE       | NONE        | NONE        |          |
| Appearance       | scalar | *Visual     | NORML      | NORML       | NORML       |          |
| Odor             | scalar | *Visual     | NORML      | NORML       | NORML       |          |
| Juui             |        |             |            | INCITIVIE   |             |          |
| Emulsified Water | scalar | *Visual     | >0.2       | NEG         | NEG         |          |



# **OIL ANALYSIS REPORT**

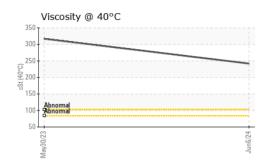



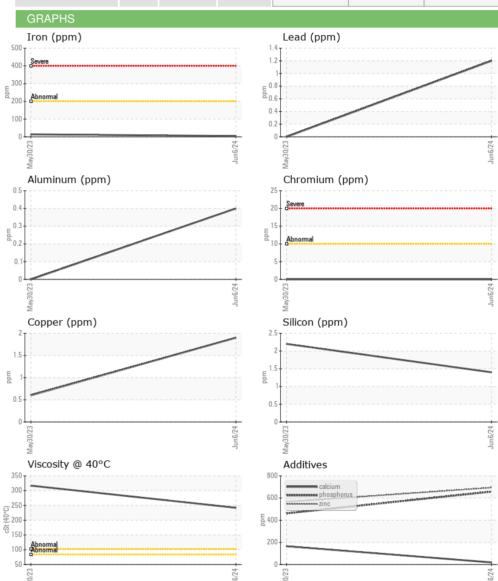





Laboratory Sample No.

: DC0036840 **Lab Number** : 06217175 Unique Number : 11090039 Test Package : MOB 1

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 21 Jun 2024

**Tested** : 24 Jun 2024 Diagnosed : 24 Jun 2024 - Don Baldridge

**CRANEWORKS INC - MID-ATLANTIC** 

11089 LEADBETTER ROAD ASHLAND, VA

US 23005 Contact: JASON WILDE

jcwilde@vacraneworks.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: CRAASHMA [WUSCAR] 06217175 (Generated: 07/12/2024 10:44:23) Rev: 1

Contact/Location: JASON WILDE - CRAASHMA

T:

F: