




OIL ANALYSIS REPORT

Sample Rating Trend

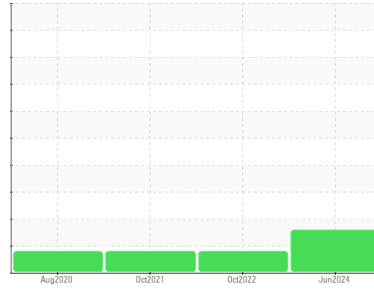

WEAR



Machine Id

015-R014

Component

Transmission (Auto)

Fluid

SCHAEFFER 315 SIMPLEX SUPREME (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. (Customer Sample Comment: Transmission fluid sample)

Wear

Bearing and/or bushing wear is indicated. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0868304	WC0698173	WC0590640
Sample Date	Client Info		18 Jun 2024	03 Oct 2022	15 Oct 2021
Machine Age	hrs	Client Info	7393	21160	19067
Oil Age	hrs	Client Info	7393	0	0
Oil Changed	Client Info		Changed	Not Changd	Not Changd
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >160	12	6	6
Chromium	ppm	ASTM D5185m >5	0	0	<1
Nickel	ppm	ASTM D5185m >5	2	0	0
Titanium	ppm	ASTM D5185m	4	0	<1
Silver	ppm	ASTM D5185m >5	0	0	<1
Aluminum	ppm	ASTM D5185m >50	2	<1	<1
Lead	ppm	ASTM D5185m >50	▲ 351	▲ 175	▲ 139
Copper	ppm	ASTM D5185m >225	▲ 208	60	34
Tin	ppm	ASTM D5185m >10	1	0	0
Antimony	ppm	ASTM D5185m	---	---	0
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 100	90	39	28
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m 0	0	3	2
Manganese	ppm	ASTM D5185m	2	<1	<1
Magnesium	ppm	ASTM D5185m 0	12	21	20
Calcium	ppm	ASTM D5185m 4300	841	3001	3124
Phosphorus	ppm	ASTM D5185m 1400	537	1069	1042
Zinc	ppm	ASTM D5185m 1700	393	1131	1132
Sulfur	ppm	ASTM D5185m 3800	2323	4456	6226

CONTAMINANTS



	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	2	5	4
Sodium	ppm	ASTM D5185m	5	0	2
Potassium	ppm	ASTM D5185m >20	6	3	2

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >0.1	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG



OIL ANALYSIS REPORT

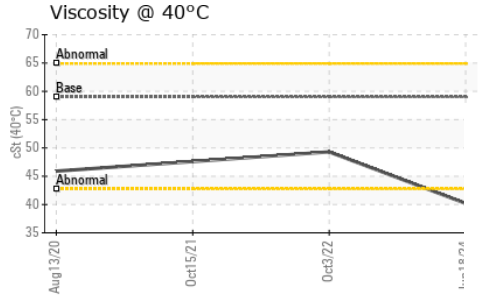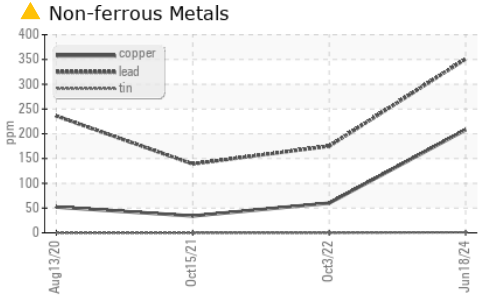




FLUID PROPERTIES

method	limit/base	current	history1	history2		
Visc @ 40°C	cSt	ASTM D445	59	40.2	49.3	47.6

SAMPLE IMAGES

method	limit/base	current	history1	history2	
Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

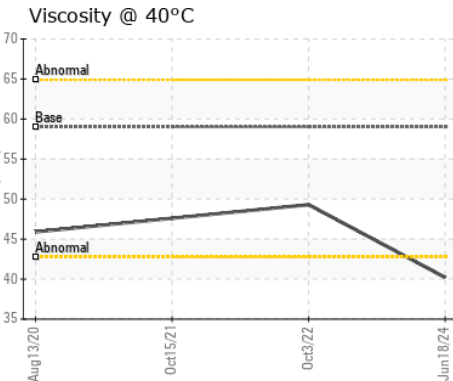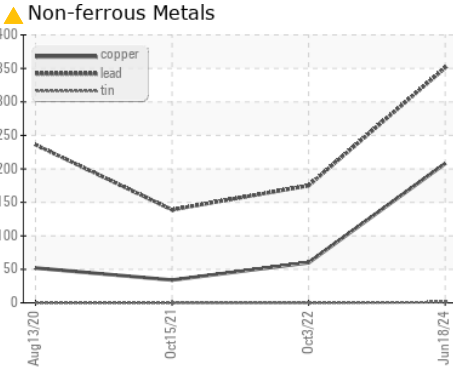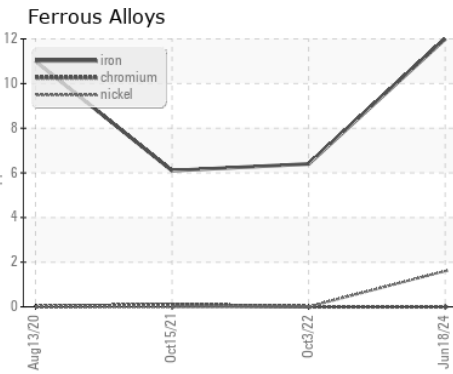

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0868304
Lab Number : **06217217**
Unique Number : 11090081
Test Package : CONST
Received : 21 Jun 2024
Tested : 24 Jun 2024
Diagnosed : 24 Jun 2024 - Don Baldrige

SHIMMICK CONSTRUCTION
 5535 TRAILHEAD DRIVE
 CHATTANOOGA, TN
 US 37415
 Contact: DANIEL LISELLA
 daniel.lisella@shimmick.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)