

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

595-E Component Hydraulic System

CHEVRON CLARITY HYDRAULIC AW 46 (430 GAL)

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Due to an abnormal test result it is recommended to contact Stauff Corp at (201)-444-7800 for help resolving the issue.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		ST44439	ST006265	
Sample Date		Client Info		14 Jun 2024	24 Mar 2008	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				ATTENTION	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	5	5	
Chromium	ppm	ASTM D5185m	>20	<1	0	
Nickel	ppm	ASTM D5185m	>20	<1	0	
Titanium	ppm	ASTM D5185m		<1	0	
Silver	ppm	ASTM D5185m		<1	0	
Aluminum	ppm	ASTM D5185m	>20	3	<1	
Lead	ppm	ASTM D5185m	>20	<1	0	
Copper	ppm	ASTM D5185m	>20	<1	<1	
Tin	ppm	ASTM D5185m	>20	<1	3	
Antimony	ppm	ASTM D5185m			0	
Vanadium	ppm	ASTM D5185m		<1	0	
Cadmium		ASTM D5185m		<1	0	
	ppm				-	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1	
Barium	ppm	ASTM D5185m		1	0	
Molybdenum	ppm	ASTM D5185m		1	<1	
Manganese	ppm	ASTM D5185m		<1	<1	
Magnesium	ppm	ASTM D5185m		10	1	
Calcium	ppm	ASTM D5185m		5	3	
Phosphorus	ppm	ASTM D5185m		196	239	
Zinc	ppm	ASTM D5185m		28	19	
Sulfur	ppm	ASTM D5185m		279	684	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	6	6	
Sodium	ppm	ASTM D5185m		0	<1	
Potassium	ppm	ASTM D5185m	>20	2	19	
Water	%	ASTM D6304	>0.05	0.003	0.001	
ppm Water	ppm	ASTM D6304	>500	26		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	7212		
Particles >6µm		ASTM D7647	>1300	499		
Particles >14µm		ASTM D7647	>160	28		
Particles >21µm		ASTM D7647	>40	7		
Particles >38µm		ASTM D7647	>10	1		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	0/16/12		
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.18 Contact/Locatio	0.340	


Report Id: INTMAT [WUSCAR] 06217273 (Generated: 06/25/2024 13:30:58) Rev: 1

0.340 0.18 Contact/Location: TYLER WALTERS - INTMAT Page 1 of 2



OIL ANALYSIS REPORT

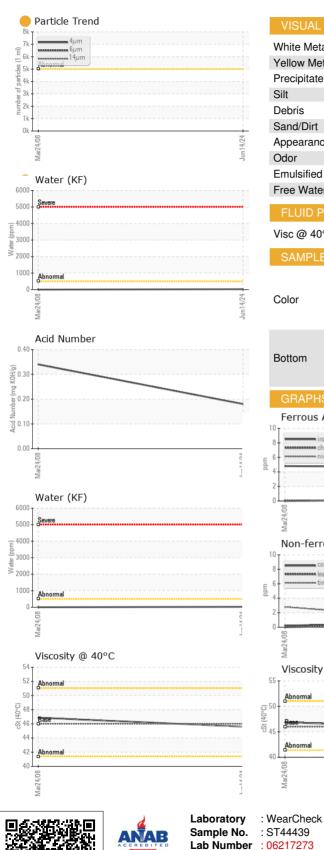

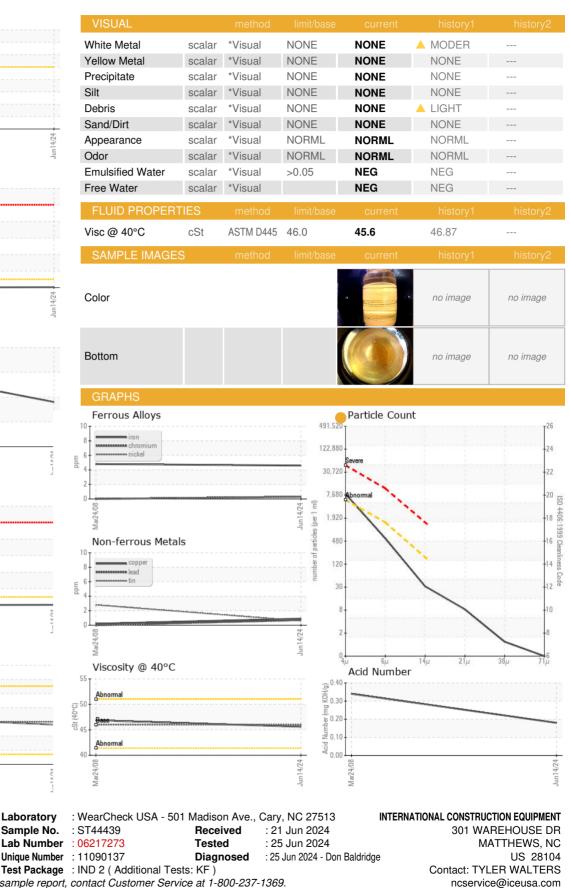

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: INTMAT [WUSCAR] 06217273 (Generated: 06/25/2024 13:30:58) Rev: 1

Certificate 12367

Contact/Location: TYLER WALTERS - INTMAT

T: (704)221-0367

F: (704)821-8201