


# **OIL ANALYSIS REPORT**

Sample Rating Trend

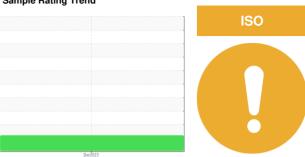

Machine Id

# KAESER 8580941 (S/N 1290)

Component Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of particulates present in the oil.


#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Dec2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
	IATION		IIIIIIIIIIII			
Sample Number		Client Info		KCPA011153		
Sample Date	laa	Client Info		18 Dec 2023		
Machine Age	hrs	Client Info		7198		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	1		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>3	<1		
Titanium	ppm	ASTM D5185m	>3	<1		
Silver	ppm	ASTM D5185m	>2	<1		
Aluminum	ppm	ASTM D5185m	>10	3		
Lead	ppm	ASTM D5185m	>10	<1		
Copper	ppm	ASTM D5185m	>50	15		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	1		
Molybdenum	ppm	ASTM D5185m	0	<1		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	100	25		
Calcium	ppm	ASTM D5185m	0	0		
Phosphorus		ASTM D5185m	0	4		
Zinc	ppm	ASTM D5185m	0	23		
-	ppm					
Sulfur	ppm	ASTM D5185m	23500	20312		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m		27		
Potassium	ppm	ASTM D5185m	>20	20		
Water	%	ASTM D6304	>0.05	0.018		
ppm Water	ppm	ASTM D6304	>500	184		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		2399		
Particles >6µm		ASTM D7647	>1300	794		
Particles >14µm		ASTM D7647	>80	<b>105</b>		
Particles >21µm		ASTM D7647	>20	<b>28</b>		
Particles >38µm		ASTM D7647	>4	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>18/17/14</b>		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.39		



## **OIL ANALYSIS REPORT**

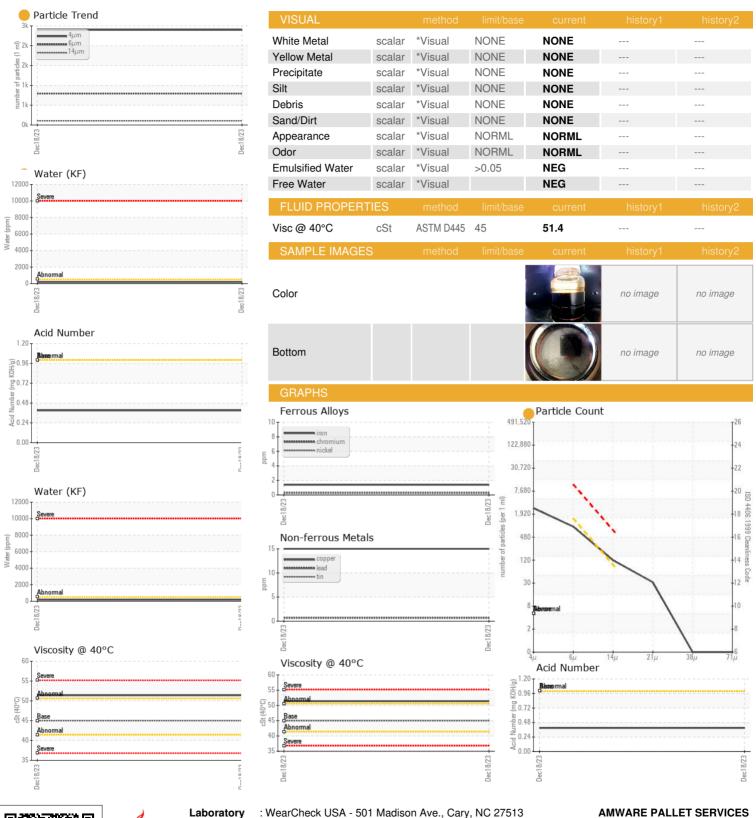





Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KCPA011153 Lab Number : 06217277

Unique Number : 11090141

Received : 21 Jun 2024 **Tested** : 25 Jun 2024 Diagnosed

: 25 Jun 2024 - Don Baldridge

US 28269 Contact: Service Manager

Contact/Location: Service Manager - AMWCHA

5808 F LONG CREEK PARK DR

Test Package : IND 2 ( Additional Tests: KF, PrtCount ) Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CHARLOTTE, NC

T:

F: