


OIL ANALYSIS REPORT

Sample Rating Trend

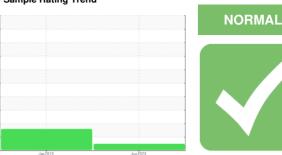

Machine Id

KAESER SK 15 7 4800949 (S/N 1323)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Jan 2019	Jun 2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA014305	KCP11551	
Sample Date		Client Info		14 Jun 2024	08 Jan 2019	
Machine Age	hrs	Client Info		30838	13291	
Oil Age	hrs	Client Info		0	785	
Oil Changed	1110	Client Info		Changed	Changed	
Sample Status				NORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	<1	
Chromium	ppm	ASTM D5185m	>10	<1	0	
Nickel	ppm	ASTM D5185m	>3	<1	<1	
Titanium	ppm	ASTM D5185m	>3	<1	0	
Silver	ppm	ASTM D5185m	>2	<1	0	
Aluminum	ppm	ASTM D5185m	>10	3	0	
Lead	ppm	ASTM D5185m	>10	<1	0	
Copper	ppm		>50	10	16	
Tin	ppm	ASTM D5185m	>10	<1	0	
Antimony	ppm	ASTM D5185m	>10		0	
Vanadium	ppm	ASTM D5185m		<1	0	
Cadmium	ppm	ASTM D5185m		<1	0	
	рртп					
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1	
Barium	ppm	ASTM D5185m	90	1	0	
Molybdenum	ppm	ASTM D5185m		<1	0	
Manganese	ppm	ASTM D5185m		<1	<1	
Magnesium	ppm	ASTM D5185m	90	33	37	
Calcium	ppm	ASTM D5185m	2	0	0	
Phosphorus	ppm	ASTM D5185m		1	5	
Zinc	ppm	ASTM D5185m		40	53	
Sulfur	ppm	ASTM D5185m		19734	24702	
CONTAMINANTS	5	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	
Sodium	ppm	ASTM D5185m		9	15	
Potassium	ppm	ASTM D5185m	>20	5	3	
Water	%	ASTM D6304	>0.05	0.018	0.010	
ppm Water	ppm	ASTM D6304	>500	189	100	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		2899	22863	
Particles >6µm		ASTM D7647	>1300	886	<u></u> 5540	
Particles >14µm		ASTM D7647	>80	70	<u>442</u>	
Particles >21µm		ASTM D7647	>20	18	<u>147</u>	
Particles >38μm		ASTM D7647	>4	1	<u> </u>	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	19/17/13	<u>^</u> 20/16	
FLUID DEGRAD	NOITA	method	limit/base	current	history1	history2



OIL ANALYSIS REPORT

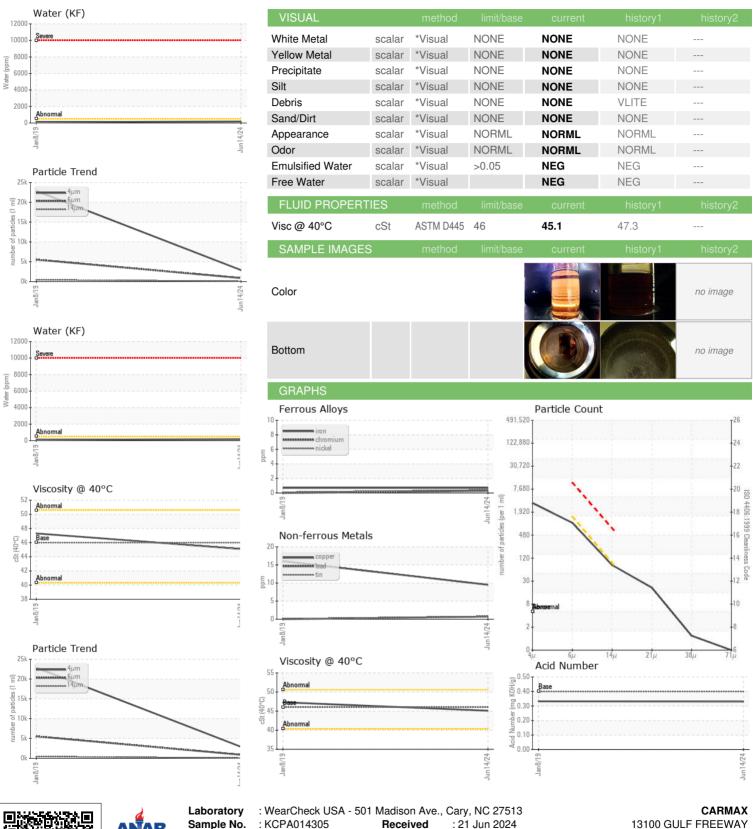





Sample No.

Lab Number : 06217298 Unique Number : 11090162

: KCPA014305 Received **Tested**

: 25 Jun 2024 Diagnosed

: 25 Jun 2024 - Don Baldridge

13100 GULF FREEWAY HOUSTON, TX US 77034

Contact: Service Manager

Test Package : IND 2 (Additional Tests: KF, PrtCount) Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: CARHOUUS [WUSCAR] 06217298 (Generated: 06/25/2024 17:26:40) Rev: 1

Contact/Location: Service Manager - CARHOUUS

T:

F: