

OIL ANALYSIS REPORT

Machine Id **KAESER ESD 300 8885842 (S/N 1171)**

Component Compressor

Fluid KAESER SIGMA (OEM) FG-460 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

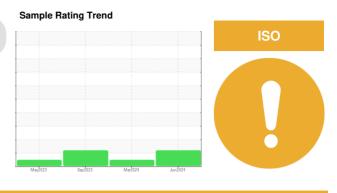

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC130302	KC123251	KC125748
Sample Date		Client Info		10 Jun 2024	19 Mar 2024	05 Sep 2023
Machine Age	hrs	Client Info		12389	10402	5713
Oil Age	hrs	Client Info		1987	0	0
Oil Changed		Client Info		Changed	N/A	N/A
Sample Status				ATTENTION	NORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	<1	<1
Chromium	ppm	ASTM D5185m	>10	<1	<1	0
Nickel	ppm	ASTM D5185m	>3	<1	0	0
Titanium	ppm	ASTM D5185m	>3	<1	<1	0
Silver	ppm	ASTM D5185m	>2	<1	<1	0
Aluminum	ppm	ASTM D5185m	>10	3	2	0
Lead	ppm	ASTM D5185m	>10	<1	0	0
Copper	ppm	ASTM D5185m	>50	1	<1	0
Tin	ppm	ASTM D5185m	>10	<1	<1	0
Vanadium	ppm	ASTM D5185m		<1	<1	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		1	<1	0
Molybdenum	ppm	ASTM D5185m		، <1	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m		1	2	2
Calcium	ppm	ASTM D5185m		0	3	<1
Phosphorus	ppm	ASTM D5185m	500	11	51	0
Zinc		ASTM D5185m	500	<1	<1	0
	ppm	ASTIVI DJIOJIII		<1	<1	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	0
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	2	2	0
Water	%	ASTM D6304	>0.05	0.003	0.004	0.003
ppm Water	ppm	ASTM D6304	>500	29	40	35.9
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1762	996	1563
Particles >6µm		ASTM D7647		760	204	535
Particles >14µm		ASTM D7647	>80	<mark> </mark> 113	22	95
Particles >21µm		ASTM D7647		<mark> </mark> 38	6	48
Particles >38µm		ASTM D7647	>4	1	1	4
Particles >71µm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	e 18/17/14	17/15/12	18/16/14
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.5	0.39	0.48	0.45



(1 m])

Water (ppm)

Water (ppm)

Bas


44

42 Abnorma

л

OIL ANALYSIS REPORT

scalar *Visual

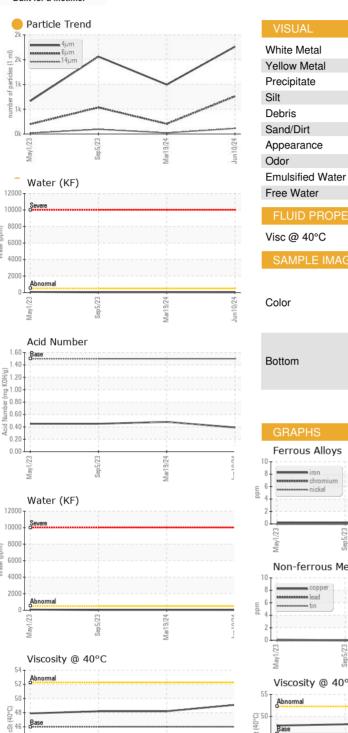


Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
	150					
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	49.1	48.2	48.2
SAMPLE IMAGES	\$	method	limit/base	current	history1	history2
Color						
Bottom						

NONE

NONE

NONE

NONE

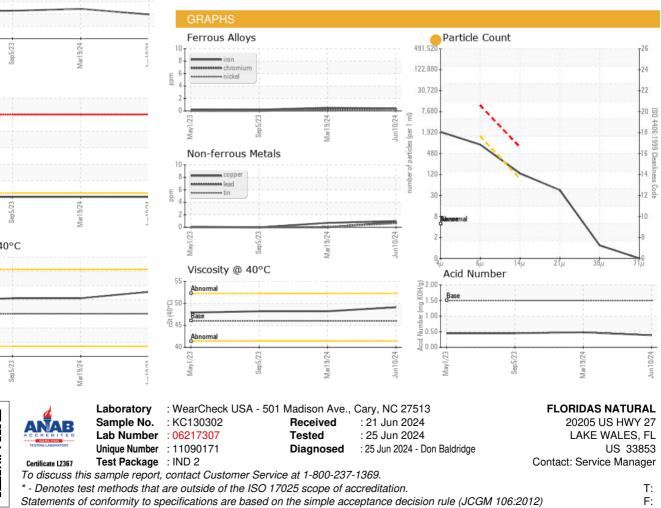

Contact/Location: Service Manager - FLOLAKKC Page 2 of 2