

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

KAESER SK 15 AIRCENTER 6570295 (S/N 1237)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | NovŽ019 | May2020 Nov2020 | | | |
|---|------------------------|--|---|--|--|---|
| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | KCPA009470 | KCP52150 | KCP39821 |
| Sample Date | | Client Info | | 29 May 2024 | 20 Dec 2022 | 16 Nov 2021 |
| Machine Age | hrs | Client Info | | 12214 | 11838 | 8912 |
| Oil Age | hrs | Client Info | | 0 | 788 | 2884 |
| Oil Changed | | Client Info | | N/A | Not Changd | Not Changd |
| Sample Status | | | | ABNORMAL | NORMAL | NORMAL |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >50 | <1 | 0 | 0 |
| Chromium | ppm | ASTM D5185m | >10 | <1 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | >3 | <1 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | >3 | <1 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >2 | <1 | 0 | <1 |
| Aluminum | ppm | ASTM D5185m | >10 | 3 | <1 | <1 |
| Lead | ppm | ASTM D5185m | >10 | <1 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >50 | 7 | 2 | 2 |
| Tin | ppm | ASTM D5185m | >10 | <1 | 0 | 0 |
| Antimony | ppm | ASTM D5185m | | | | 0 |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Barium | ppm | ASTM D5185m | 90 | 47 | 23 | 16 |
| Molybdenum | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Magnesium | ppm | ASTM D5185m | 90 | 80 | 76 | 79 |
| Calcium | ppm | ASTM D5185m | 2 | 0 | 2 | 2 |
| Phosphorus | ppm | ASTM D5185m | | 4 | 4 | 1 |
| Zinc | ppm | ASTM D5185m | | 10 | <1 | 0 |
| Sulfur | ppm | ASTM D5185m | | 19165 | 19647 | 17073 |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ACTM DE10Ess | >25 | 4 | <1 | 0 |
| | ppiii | ASTM D5185m | >25 | 1 | ~ 1 | • |
| Sodium | ppm | ASTM D5185m | >23 | 10 | 9 | 20 |
| Sodium Potassium | | | >20 | | | |
| | ppm | ASTM D5185m | >20 | 10 | 9 | 20 |
| Potassium | ppm ppm | ASTM D5185m ASTM D5185m | >20 | 10 3 | 9 | 20 1 |
| Potassium Water | ppm ppm % ppm | ASTM D5185m ASTM D5185m ASTM D6304 | >20 >0.05 | 10 3 0.038 | 9 0 0.023 | 20 1 0.026 |
| Potassium Water ppm Water | ppm ppm % ppm | ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 | >20 >0.05 >500 | 10 3 0.038 389 | 9 0 0.023 233.9 | 20 1 0.026 260.5 |
| Potassium Water ppm Water FLUID CLEANLIN | ppm ppm % ppm | ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method | >20 >0.05 >500 limit/base | 10 3 0.038 389 current | 9 0 0.023 233.9 history1 | 20 1 0.026 260.5 history2 |
| Potassium Water ppm Water FLUID CLEANLIN Particles >4µm | ppm ppm % ppm | ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 method ASTM D7647 | >20 >0.05 >500 limit/base | 10 3 0.038 389 current 38986 | 9 0 0.023 233.9 history1 1276 | 20 1 0.026 260.5 history2 2011 |
| Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm | ppm ppm % ppm | ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 | >20 >0.05 >500 limit/base | 10 3 0.038 389 current 38986 ▲ 9756 | 9 0 0.023 233.9 history1 1276 369 | 20 1 0.026 260.5 history2 2011 646 |
| Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm | ppm ppm % ppm | ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647 | >20 >0.05 >500 limit/base >1300 >80 | 10 3 0.038 389 current 38986 9756 687 | 9 0 0.023 233.9 history1 1276 369 24 | 20 1 0.026 260.5 history2 2011 646 48 |
| Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm | ppm ppm % ppm | ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 | >20 >0.05 >500 limit/base >1300 >80 >20 | 10 3 0.038 389 current 38986 ▲ 9756 ▲ 687 ▲ 187 | 9 0 0.023 233.9 history1 1276 369 24 | 20 1 0.026 260.5 history2 2011 646 48 9 |
| Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm | ppm ppm % ppm | ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 | >20 >0.05 >500 limit/base >1300 >80 >20 >4 | 10 3 0.038 389 current 38986 ▲ 9756 ▲ 687 ▲ 187 ▲ 8 | 9 0 0.023 233.9 history1 1276 369 24 4 | 20 1 0.026 260.5 history2 2011 646 48 9 |



OIL ANALYSIS REPORT

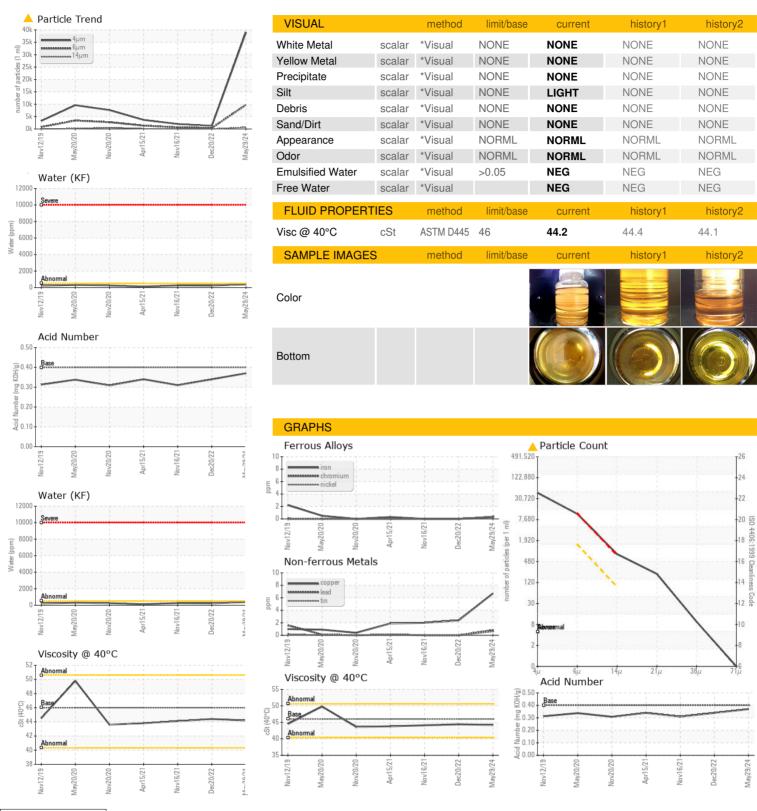





Certificate 12367

Sample No.

Lab Number

Laboratory

: KCPA009470 : 06217310

Unique Number : 11090174

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 21 Jun 2024 **Tested** : 25 Jun 2024

Diagnosed : 25 Jun 2024 - Don Baldridge

Test Package : IND 2 (Additional Tests: KF, PrtCount) To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

AMAZON 7200 DISCOVERY WAY CHATTANOOGA, TN US 37416 Contact: JUAN CLARK

CLARKJUAN@AMAZON.COM T:

F: