

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

KAESER 7087279

Component Compressor Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The oil viscosity is higher than normal. The AN level is acceptable for this fluid.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2		
Sample Number		Client Info		KCPA011330	KCP51693	KCP30521		
Sample Date		Client Info		29 May 2024	17 May 2022	18 Jan 2021		
Machine Age	hrs	Client Info		22046	6989	1407		
Oil Age	hrs	Client Info		0	6989	1407		
Oil Changed		Client Info		N/A	Changed	Not Changd		
Sample Status				ABNORMAL	NORMAL	ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>50	0	<1	<1		
Chromium	ppm	ASTM D5185m		<1	0	0		
Nickel	ppm	ASTM D5185m	>3	<1	0	0		
Titanium	ppm	ASTM D5185m		<1	0	0		
Silver	ppm	ASTM D5185m	>2	<1	0	<1		
Aluminum	ppm	ASTM D5185m		3	0	<1		
Lead	ppm	ASTM D5185m	>10	<1	0	<1		
Copper	ppm	ASTM D5185m		4	8	<1		
Tin	ppm	ASTM D5185m	>10	<1	0	<1		
Antimony	ppm	ASTM D5185m	-			0		
Vanadium	ppm	ASTM D5185m		<1	0	0		
Cadmium	ppm	ASTM D5185m		<1	0	0		
ADDITIVES	1010	method	limit/base	current	history1			
			inniv base			history2		
Boron	ppm	ASTM D5185m		0	0	<1		
Barium	ppm	ASTM D5185m	90	1	1	43		
Molybdenum	ppm	ASTM D5185m		<1	0	0		
Manganese	ppm	ASTM D5185m	00	<1	<1	<1		
Magnesium	ppm	ASTM D5185m	90	<1	17	83		
Calcium	ppm	ASTM D5185m	2	0	0	4		
Phosphorus	ppm	ASTM D5185m		<1	7	8		
Zinc	ppm	ASTM D5185m		<1	27	0		
Sulfur	ppm	ASTM D5185m		19426	16929	16690		
CONTAMINANTS		method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	2	1	<1		
Sodium	ppm	ASTM D5185m		0	12	17		
Potassium	ppm	ASTM D5185m		2	13	11		
Water	%	ASTM D6304	>0.05	0.008	0.013	0.030		
ppm Water	ppm	ASTM D6304	>500	87	136.7	308.6		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2		
Particles >4µm		ASTM D7647		724	860	10076		
Particles >6µm		ASTM D7647	>1300	247	211	4249		
Particles >14µm		ASTM D7647	>80	10	25	2 80		
Particles >21µm		ASTM D7647	>20	2	7	937		
Particles >38µm		ASTM D7647	>4	0	0	0		
Particles >71µm		ASTM D7647	>3	0	0	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	17/15/10	17/15/12	19/15		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2		
Acid Number (AN) :56:54) Rev: 1	mg KOH/g	ASTM D8045	0.4	0.54 Contact/L	0.54 0.34 0.352 Contact/Location: W. HOWEL - AMATU			


Report Id: AMATUL [WUSCAR] 06217332 (Generated: 06/26/2024 17:56:54) Rev: 1


Contact/Location: W. HOWEL - AMATUL




OIL ANALYSIS REPORT





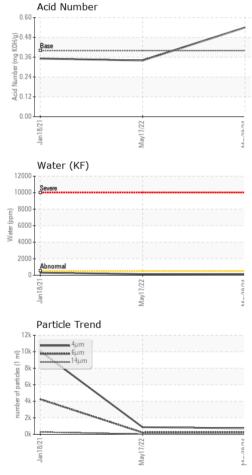

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	▲ 59.83	44.9	44.3
SAMPLE IMAGES	6	method	limit/base	current	history1	history2
Color				•		
Bottom						

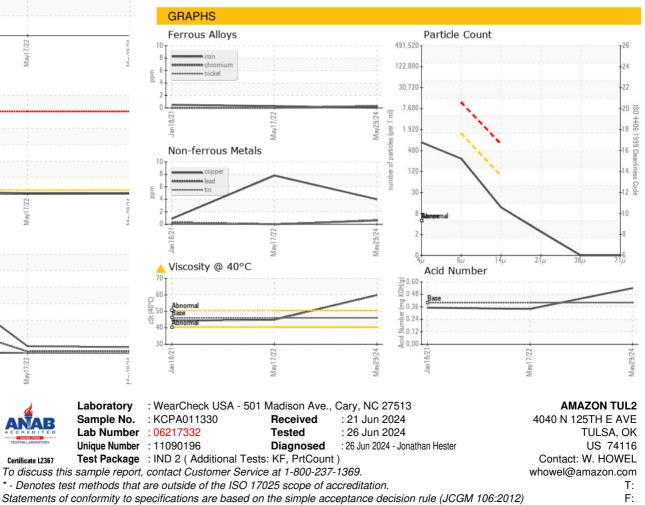

Report Id: AMATUL [WUSCAR] 06217332 (Generated: 06/26/2024 17:56:54) Rev: 1

Certificate 12367

Contact/Location: W. HOWEL - AMATUL Page 2 of 2