




OIL ANALYSIS REPORT

Sample Rating Trend

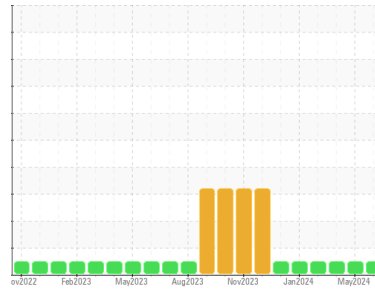

NORMAL



Area
ARIZONA GROUPING
 Machine Id
8477
 Component
Diesel Engine
 Fluid
NAPA Motor Oil 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | | WC0935455 | WC0935448 | WC0899587 |
| Sample Date | Client Info | | | 11 Jun 2024 | 04 May 2024 | 08 Apr 2024 |
| Machine Age | hrs | Client Info | | 2270 | 2158 | 2077 |
| Oil Age | hrs | Client Info | | 562 | 450 | 369 |
| Oil Changed | Client Info | | | Not Chngd | Not Chngd | Not Chngd |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel | WC Method | >5 | | <1.0 | <1.0 | <1.0 |
| Water | WC Method | >0.2 | | NEG | NEG | NEG |
| Glycol | WC Method | | | NEG | NEG | NEG |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m | >100 | 49 | 46 | 37 |
| Chromium | ppm | ASTM D5185m | >20 | 1 | 2 | <1 |
| Nickel | ppm | ASTM D5185m | >4 | <1 | <1 | <1 |
| Titanium | ppm | ASTM D5185m | | 0 | <1 | 0 |
| Silver | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >20 | 3 | 3 | 3 |
| Lead | ppm | ASTM D5185m | >40 | 0 | <1 | <1 |
| Copper | ppm | ASTM D5185m | >330 | 4 | 9 | 1 |
| Tin | ppm | ASTM D5185m | >15 | <1 | <1 | <1 |
| Vanadium | ppm | ASTM D5185m | | <1 | <1 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |

| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|-------------|------------|-------------|----------|----------|
| Boron | ppm | ASTM D5185m | | 50 | 63 | 61 |
| Barium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 6 | 8 | 6 |
| Manganese | ppm | ASTM D5185m | | 2 | 1 | 1 |
| Magnesium | ppm | ASTM D5185m | | 760 | 691 | 734 |
| Calcium | ppm | ASTM D5185m | | 1384 | 1334 | 1349 |
| Phosphorus | ppm | ASTM D5185m | | 762 | 761 | 732 |
| Zinc | ppm | ASTM D5185m | | 851 | 839 | 840 |
| Sulfur | ppm | ASTM D5185m | | 3407 | 3063 | 3455 |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|-------------|------------|-----------|----------|----------|
| Silicon | ppm | ASTM D5185m | >25 | 10 | 9 | 8 |
| Sodium | ppm | ASTM D5185m | | 3 | 3 | 3 |
| Potassium | ppm | ASTM D5185m | >20 | 6 | 6 | 4 |


| INFRA-RED | | method | limit/base | current | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 | >3 | 0.8 | 0.8 | 0.7 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 10.5 | 10.4 | 10.3 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 21.9 | 21.6 | 20.9 |

| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 18.2 | 18.1 | 17.2 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | | 6.4 | 6.4 | 6.8 |




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

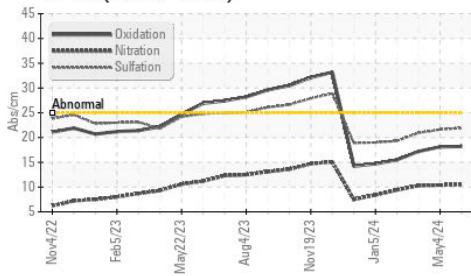

Base Number

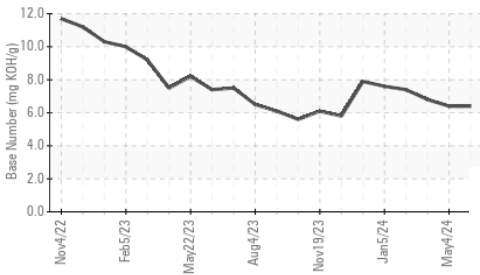

Viscosity @ 100°C

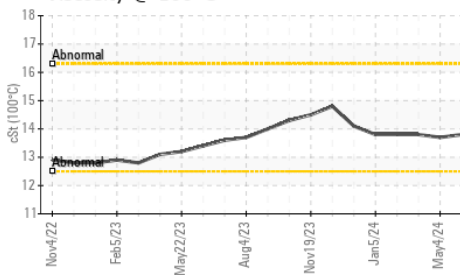


| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D445 | 13.8 | 13.7 | 13.8 |

GRAPHS


Ferrous Alloys

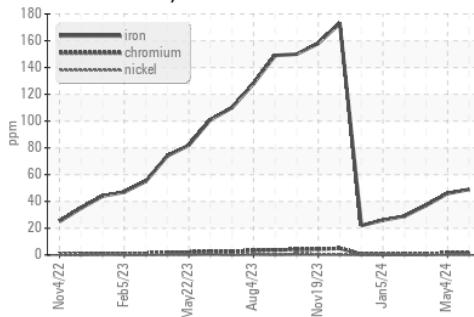


Non-ferrous Metals

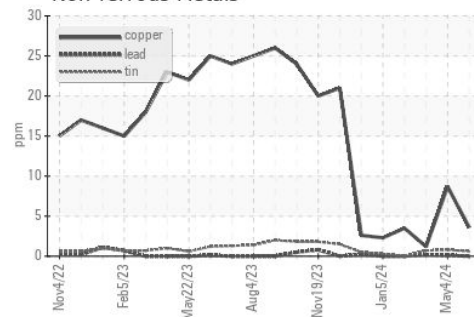

Viscosity @ 100°C

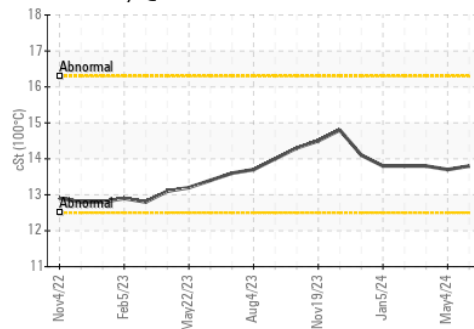

Base Number

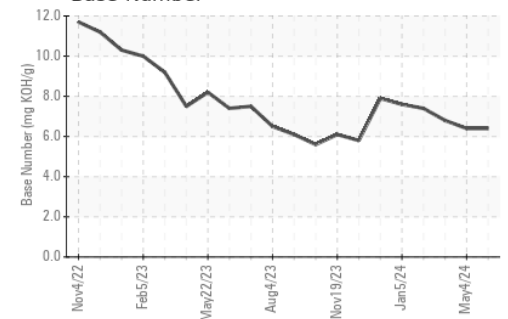

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0935455
 Lab Number : 06217549
 Unique Number : 11090413
 Test Package : FLEET

Received : 21 Jun 2024
 Tested : 24 Jun 2024
 Diagnosed : 24 Jun 2024 - Wes Davis

LIBERTY DISPOSAL
 6401 S EASTERN AVE
 OKLAHOMA CITY, OK
 US 73149
 Contact: M Rutherford
 M.Rutherford@ldi89.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: