


# OIL ANALYSIS REPORT

Sample Rating Trend



## VISCOSITY

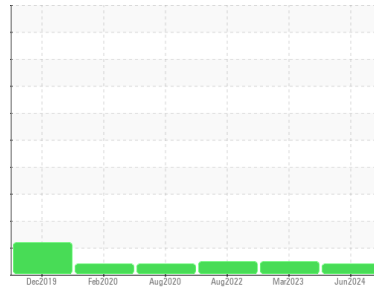

Machine Id

**2002**

Component

**Diesel Engine**

Fluid

**DIESEL ENGINE OIL SAE 5W30 (--- QTS)**

### DIAGNOSIS

**Recommendation**

Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The oil viscosity is higher than normal. The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>HRE0000216</b>	WC0786071	WC0686111
Sample Date	Client Info			<b>13 Jun 2024</b>	23 Mar 2023	06 Aug 2022
Machine Age	mls	Client Info		<b>10000</b>	397643	345947
Oil Age	mls	Client Info		<b>50000</b>	50000	100000
Oil Changed	Client Info			<b>Not Chngd</b>	Not Chngd	Changed
Sample Status				<b>ATTENTION</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>27</b>	29	33
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1	<1
Aluminum	ppm	ASTM D5185m	>20	<b>7</b>	7	6
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>330	<b>28</b>	5	7
Tin	ppm	ASTM D5185m	>15	<b>2</b>	<1	1
Antimony	ppm	ASTM D5185m		<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>10</b>	14	14
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m	100	<b>68</b>	69	65
Manganese	ppm	ASTM D5185m		<b>2</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>1057</b>	1176	1086
Calcium	ppm	ASTM D5185m	3000	<b>1133</b>	900	860
Phosphorus	ppm	ASTM D5185m	1150	<b>1068</b>	1126	990
Zinc	ppm	ASTM D5185m	1350	<b>1340</b>	1353	1227
Sulfur	ppm	ASTM D5185m	4250	<b>3430</b>	3813	2867

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>18</b>	12	7
Sodium	ppm	ASTM D5185m		<b>9</b>	5	3
Potassium	ppm	ASTM D5185m	>20	<b>16</b>	10	11

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.8</b>	0.9	1
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.5</b>	11.7	14.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.3</b>	24.8	28.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>21.6</b>	22.3	27.4
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>6.4</b>	6.4	6.4





# OIL ANALYSIS REPORT

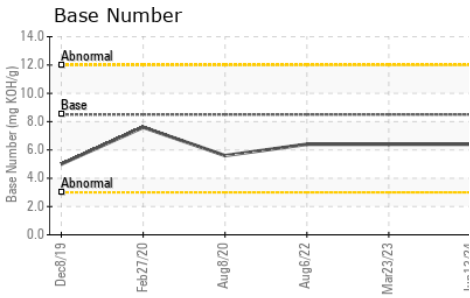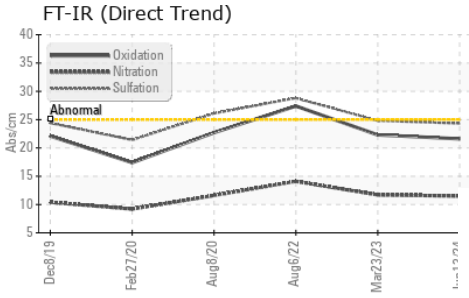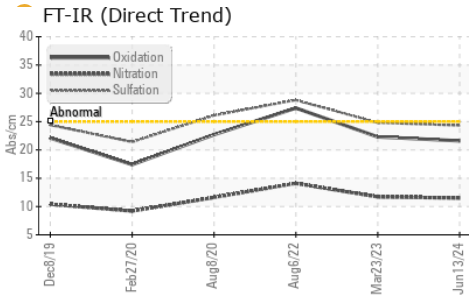

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	10.9	13.4	11.8

## GRAPHS

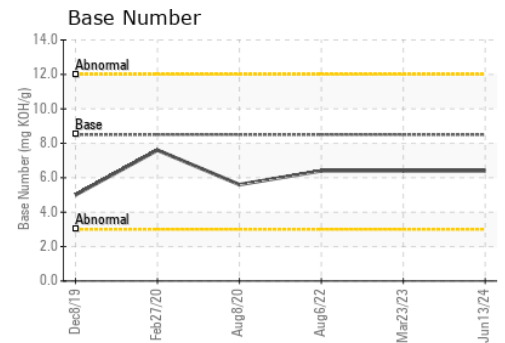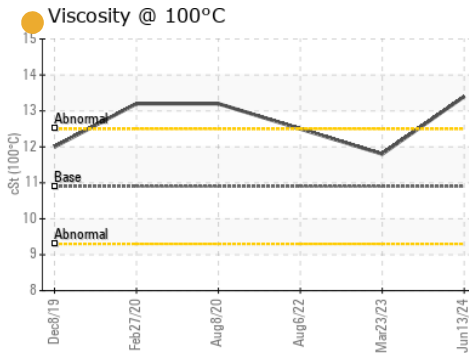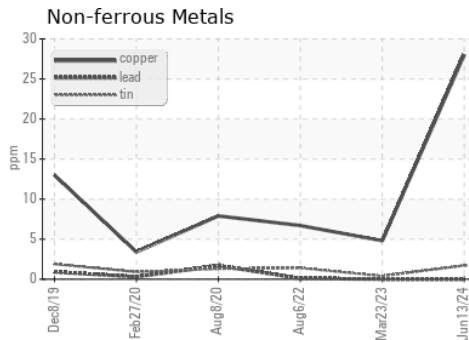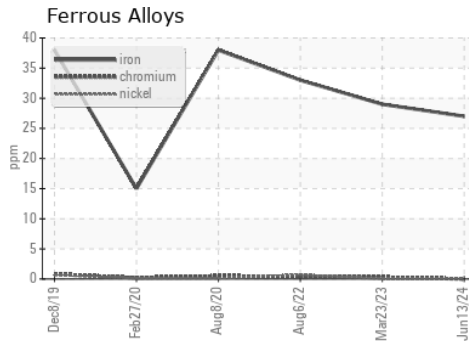

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : HRE0000216  
**Lab Number** : 06217558  
**Unique Number** : 11090422  
**Test Package** : FLEET

**Received** : 21 Jun 2024  
**Tested** : 25 Jun 2024  
**Diagnosed** : 25 Jun 2024 - Don Baldrige

**MABE TRUCKING**  
 PO BOX 1081  
 EDEN, NC  
 US 27289

Contact: MAINTENANCE  
 maintenancemanager@mabetrucking.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (336)635-1791