

# **OIL ANALYSIS REPORT**



## Machine Id SUL Component Port Main Engine Fluid CHEVRON DELO 400 LE 15W40 (---- GAL)

## DIAGNOSIS

#### A Recommendation

We advise that you check the fuel injection system. Resample at the next service interval to monitor.

#### 🔺 Wear

The lead level is abnormal. All other component wear rates are normal.

# Contamination

There is a moderate amount of fuel present in the oil.


#### Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil.


SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		MW0060668	MW0060666	MW0031822
Sample Date		Client Info		13 Jun 2024	23 Feb 2024	05 Jun 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
CONTAMINATION	V	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>75	31	30	47
Chromium	ppm	ASTM D5185m	>8	<1	<1	1
Nickel	ppm	ASTM D5185m	>2	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>15	4	4	<1
Lead	ppm	ASTM D5185m	>18	<u> </u>	▲ 33	▲ 65
Copper	ppm	ASTM D5185m		9	17	16
Tin	ppm	ASTM D5185m	>14	3	3	4
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		200	272	200
Devision				0	0	
Barium	mag				U	0
	ppm ppm	ASTM D5185m ASTM D5185m		-		0 99
Molybdenum	ppm	ASTM D5185m		117	123	99
Manganese	ppm ppm	ASTM D5185m ASTM D5185m		117 1	123 1	99 2
Molybdenum Manganese Magnesium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m		117 1 691	123 1 720	99 2 651
Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	1200	117 1 691 1497	123 1 720 1561	99 2 651 1555
Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	1200	117 1 691 1497 712	123 1 720 1561 732	99 2 651 1555 654
Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	1200 1300 3200	117 1 691 1497	123 1 720 1561	99 2 651 1555
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	1300	117 1 691 1497 712 863	123 1 720 1561 732 884	99 2 651 1555 654 854
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	1300 3200 limit/base	117 1 691 1497 712 863 2755	123 1 720 1561 732 884 2445	99 2 651 1555 654 854 2834
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	1300 3200 limit/base >20	117 1 691 1497 712 863 2755 current	123 1 720 1561 732 884 2445 history1	99 2 651 1555 654 854 2834 history2
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m <b>method</b> ASTM D5185m	1300 3200 limit/base >20	117 1 691 1497 712 863 2755 current 7	123 1 720 1561 732 884 2445 history1 7	99 2 651 1555 654 854 2834 history2 7
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m <b>method</b> ASTM D5185m	1300 3200 limit/base >20 >75	117 1 691 1497 712 863 2755 current 7 3	123 1 720 1561 732 884 2445 history1 7 6	99 2 651 1555 654 854 2834 history2 7 3
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	1300 3200 limit/base >20 >75 >20	117 1 691 1497 712 863 2755 current 7 3 3	123 1 720 1561 732 884 2445 history1 7 6 1	99 2 651 1555 654 854 2834 history2 7 3 2
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	1300 3200 limit/base >20 >75 >20 >4.0	117 1 691 1497 712 863 2755 current 7 3 3 3 ▲ 6.1	123 1 720 1561 732 884 2445 history1 7 6 1 1 ▲ 4.6	99 2 651 1555 654 854 2834 history2 7 3 2 2 ▲ 7.4
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel	ppm ppm ppm ppm ppm ppm ppm ppm ppm %	ASTM D5185m ASTM D3524	1300 3200 limit/base >20 >75 >20 >4.0 limit/base	117 1 691 1497 712 863 2755 current 7 3 3 3 ▲ 6.1 current	123 1 720 1561 732 884 2445 history1 7 6 1 1 ▲ 4.6 history1	99 2 651 1555 654 854 2834 history2 7 3 2 2 ▲ 7.4
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D3524 method	1300 3200 limit/base >20 >75 >20 >4.0 limit/base	117 1 691 1497 712 863 2755 current 7 3 3 3 ▲ 6.1 current 0.7	123 1 720 1561 732 884 2445 history1 7 6 1 7 6 1 4.6 1 4.6 history1 0.5	99 2 651 1555 654 854 2834 history2 7 3 2 7 3 2 7 3 2 7.4 history2 0.5
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ppm %	ASTM D5185m ASTM D3524 <b>method</b> *ASTM D7844	1300 3200  imit/base >20 >75 >20 >4.0  imit/base	117 1 691 1497 712 863 2755 current 7 3 3 3 ▲ 6.1 current 0.7 10.8	123 1 720 1561 732 884 2445 history1 7 6 1 7 6 1 4.6 1 4.6 history1 0.5 9.9	99 2 651 1555 654 854 2834 history2 7 3 2 ▲ 7.4 history2 0.5 11.3
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm %	ASTM D5185m ASTM D51854 *ASTM D7824 *ASTM D7824 *ASTM D7415	1300 3200  imit/base >20 >75 >20 >4.0  imit/base >20 >30	117 1 691 1497 712 863 2755 current 7 3 3 3 ▲ 6.1 current 0.7 10.8 25.3	123 1 720 1561 732 884 2445 history1 7 6 1 7 6 1 1 ▲ 4.6 history1 0.5 9.9 24.7	99 2 651 1555 654 854 2834 history2 7 3 2 2 ▲ 7.4 history2 0.5 11.3 24.6





# **OIL ANALYSIS REPORT**













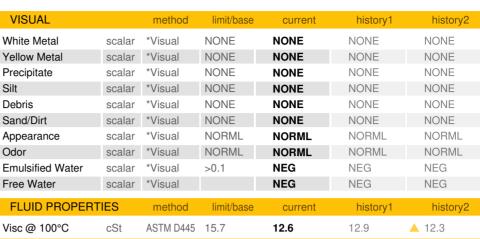

GRAPHS Ferrous Alloys

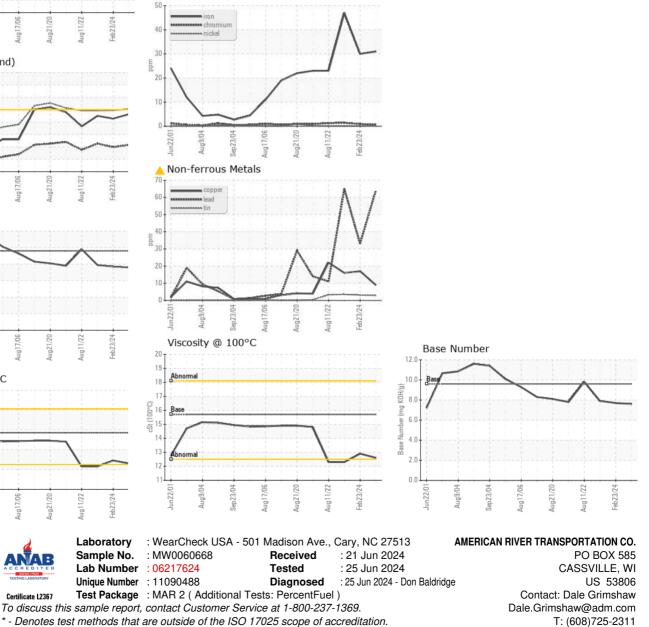

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: AMECAS [WUSCAR] 06217624 (Generated: 06/26/2024 09:43:12) Rev: 1

Certificate 12367

Contact/Location: Dale Grimshaw - AMECAS

E: