

# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Machine Id  
**CUMMINS 03-19**  
Component  
**Main Engine**  
Fluid  
**KENDALL SUPER-D XA 15W40 (--- GAL)**

**DIAGNOSIS**

**Recommendation**  
Resample at the next service interval to monitor.

**Wear**  
All component wear rates are normal.

**Contamination**  
Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

**Fluid Condition**  
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>HRE0000283</b>	---	---
Sample Date	Client Info			<b>18 Jun 2024</b>	---	---
Machine Age	hrs	Client Info		<b>0</b>	---	---
Oil Age	hrs	Client Info		<b>250</b>	---	---
Oil Changed	Client Info			<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>4.0		<b>&lt;1.0</b>	---	---
Water	WC Method	>0.1		<b>NEG</b>	---	---
Glycol	WC Method			<b>NEG</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>75	<b>14</b>	---	---
Chromium	ppm	ASTM D5185m	>8	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m	>3	<b>66</b>	---	---
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m	>15	<b>3</b>	---	---
Lead	ppm	ASTM D5185m	>18	<b>3</b>	---	---
Copper	ppm	ASTM D5185m	>80	<b>3</b>	---	---
Tin	ppm	ASTM D5185m	>14	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>1</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	50	<b>102</b>	---	---
Barium	ppm	ASTM D5185m		<b>1</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>13</b>	---	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	270	<b>346</b>	---	---
Calcium	ppm	ASTM D5185m	1900	<b>2137</b>	---	---
Phosphorus	ppm	ASTM D5185m	1000	<b>813</b>	---	---
Zinc	ppm	ASTM D5185m	1260	<b>991</b>	---	---
Sulfur	ppm	ASTM D5185m	3400	<b>3653</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>7</b>	---	---
Sodium	ppm	ASTM D5185m	>75	<b>3</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		<b>0.2</b>	---	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.1</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.5</b>	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.9</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.5	<b>8.3</b>	---	---






# OIL ANALYSIS REPORT

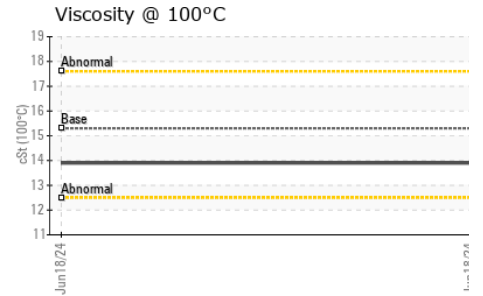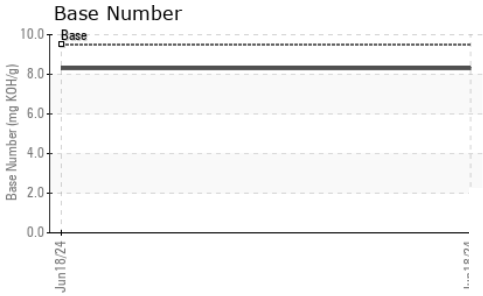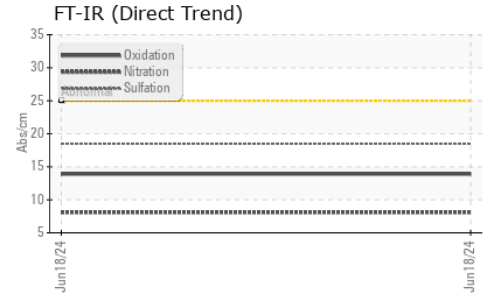

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---
Free Water	scalar	*Visual		<b>NEG</b>	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.3	<b>13.9</b>	---

### GRAPHS

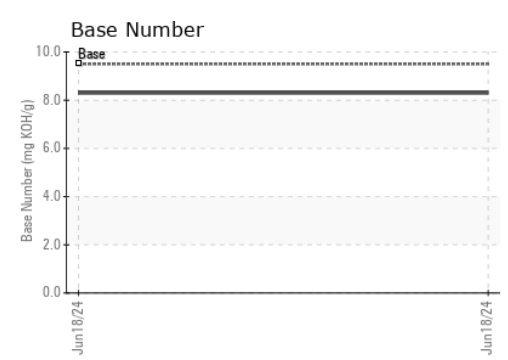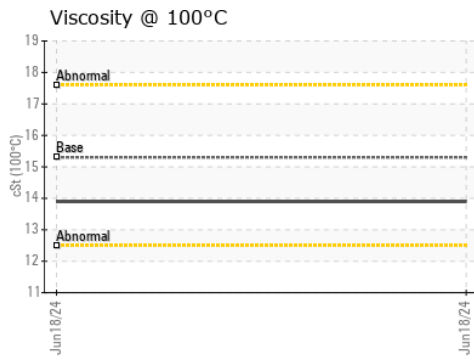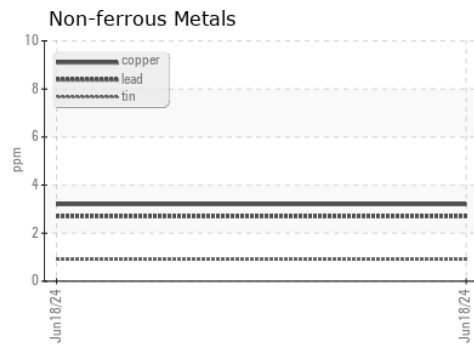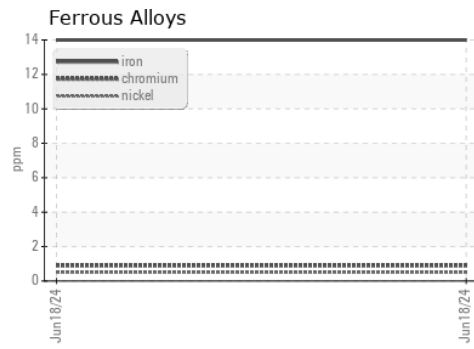

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : HRE0000283      **Received** : 24 Jun 2024  
**Lab Number** : **06217877**      **Tested** : 25 Jun 2024  
**Unique Number** : 11096074      **Diagnosed** : 25 Jun 2024 - Wes Davis  
**Test Package** : FLEET

**SUPERIOR MARINE**  
 201 KELLY LANE  
 CHESAPEAKE, OH  
 US 45619  
 Contact: DARRELL KEARNS  
 darrellkearns@superiormarineinc.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)