




OIL ANALYSIS REPORT



Machine Id
CATEPILLAR 140H 8201 (S/N N9M00225)
 Component
Hydraulic System
 Fluid
 {not provided} (--- GAL)

Sample Rating Trend

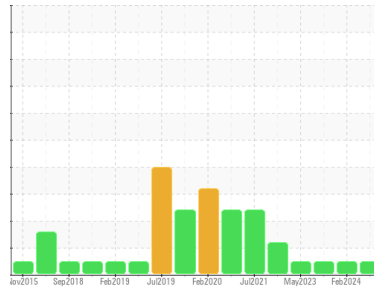

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

Sample Number	Client Info	method	limit/base	current	history1	history2
Sample Number	Client Info			WC0888064	WC0888159	WC0862915
Sample Date	Client Info			13 Jun 2024	15 Feb 2024	25 Oct 2023
Machine Age	hrs	Client Info		13597	13039	12537
Oil Age	hrs	Client Info		13597	13039	12537
Oil Changed		Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION

Water	WC Method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

Element	unit	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	10	9	7
Chromium	ppm	ASTM D5185m	>10	0	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	8	8	2
Lead	ppm	ASTM D5185m	>10	0	<1	0
Copper	ppm	ASTM D5185m	>75	4	3	4
Tin	ppm	ASTM D5185m	>10	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

Element	unit	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		54	50	53
Barium	ppm	ASTM D5185m		0	0	20
Molybdenum	ppm	ASTM D5185m		<1	0	2
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		24	23	18
Calcium	ppm	ASTM D5185m		1945	1681	1585
Phosphorus	ppm	ASTM D5185m		932	872	843
Zinc	ppm	ASTM D5185m		1133	1072	998
Sulfur	ppm	ASTM D5185m		2998	2395	3013

CONTAMINANTS





Element	unit	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	20	17	11
Sodium	ppm	ASTM D5185m		4	3	4
Potassium	ppm	ASTM D5185m	>20	2	3	<1

FLUID CLEANLINESS

Particles	unit	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	3486	3705	925
Particles >6µm		ASTM D7647	>1300	427	373	264
Particles >14µm		ASTM D7647	>160	40	32	30
Particles >21µm		ASTM D7647	>40	3	8	10
Particles >38µm		ASTM D7647	>10	0	1	1
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/16/12	19/16/12	17/15/12

FLUID DEGRADATION


Acid Number (AN)	mg KOH/g	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.78	0.64	0.68

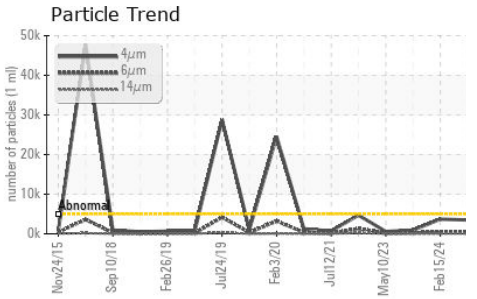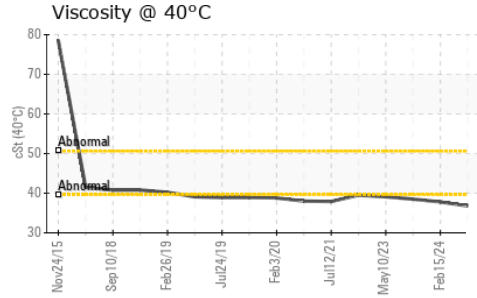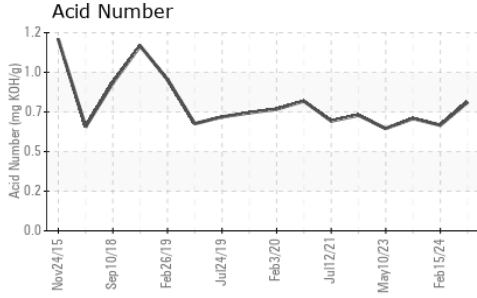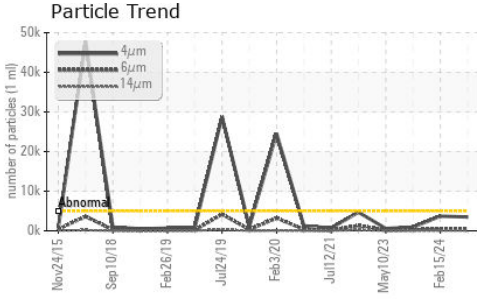






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	36.8	37.8	38.5

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

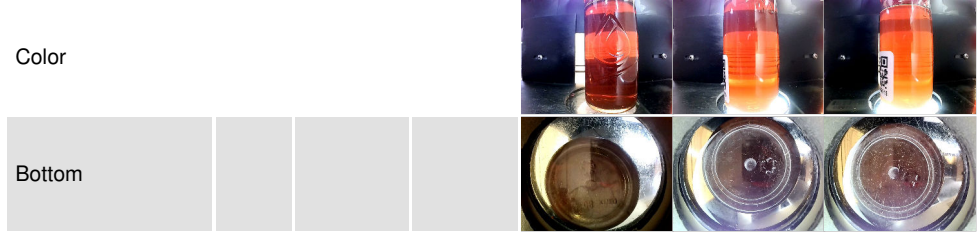

GRAPHS

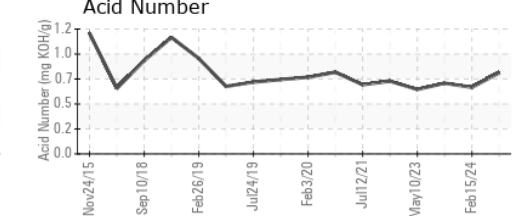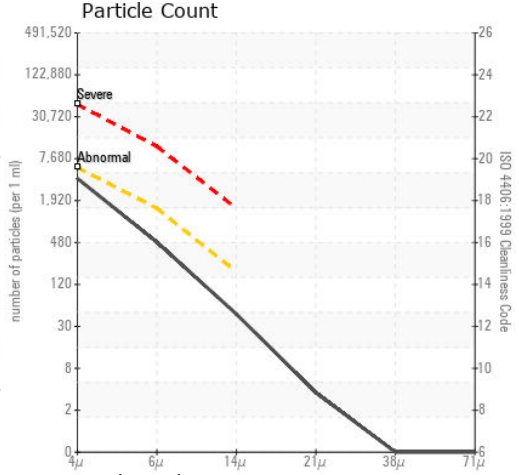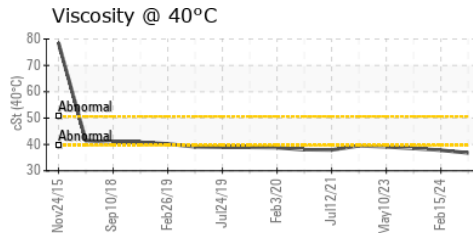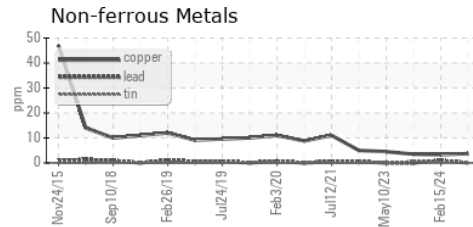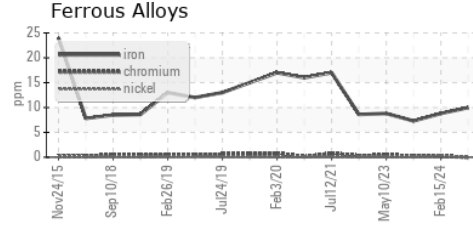

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0888064
 Lab Number : 06218106
 Unique Number : 11096303
 Test Package : CONST

Received : 24 Jun 2024
 Tested : 25 Jun 2024
 Diagnosed : 25 Jun 2024 - Don Baldrige

TRADER CONSTRUCTION CO.
 PO DRAWER 1578
 NEW BERN, NC
 US 28563
 Contact: MIKE WYATT
 mw Wyatt@traderconstruction.com
 T: (252)633-1399
 F: (252)638-4871

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)