

# **OIL ANALYSIS REPORT**

Area [21049] 20-85

**Hydraulic System** 

**CONOCO MEGAFLOW AW 46 (--- GAL)** 

# Sample Rating Trend **VIS DEBRIS**

## **DIAGNOSIS**

#### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

#### Wear

All component wear rates are normal.

#### Contamination

Moderate concentration of visible dirt/debris present in the oil.


### **Fluid Condition**


The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in


			Aug2023	Jun 2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0940747	WC0802349	
Sample Date		Client Info		13 Jun 2024	18 Aug 2023	
Machine Age	hrs	Client Info		8659	8659	
Oil Age	hrs	Client Info		8659	536	
Oil Changed		Client Info		Changed	Not Changd	
Sample Status				ABNORMAL	NORMAL	
CONTAMINATION	V	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	6	7	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>10	0	0	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>10	<1	3	
Lead	ppm	ASTM D5185m	>10	0	0	
Copper	ppm	ASTM D5185m	>75	2	1	
Tin	ppm	ASTM D5185m	>10	<1	0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		19	25	
Barium	ppm	ASTM D5185m		0	0	
Molybdenum	ppm	ASTM D5185m		0	0	
Manganese	ppm	ASTM D5185m		<1	<1	
Magnesium	ppm	ASTM D5185m		7	10	
Calcium	ppm	ASTM D5185m		666	780	
Phosphorus	ppm	ASTM D5185m		556	558	
Zinc	ppm	ASTM D5185m		648	662	
Sulfur	ppm	ASTM D5185m		1704	1771	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	4	3	
Sodium	ppm	ASTM D5185m		3	<1	
Potassium	ppm	ASTM D5185m	>20	3	<1	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
		ASTM D7647	>5000		4108	
Particles >4µm		7.0 TW D7 0 T7				
Particles >6μm		ASTM D7647	>1300		617	
Particles >6μm Particles >14μm		ASTM D7647 ASTM D7647	>1300 >160		50	
Particles >6μm Particles >14μm Particles >21μm		ASTM D7647	>1300			
Particles >6μm Particles >14μm Particles >21μm Particles >38μm		ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>1300 >160 >40 >10		50 14 1	
Particles >6μm Particles >14μm Particles >21μm Particles >38μm Particles >71μm		ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>1300 >160 >40 >10 >3		50 14 1 0	
Particles >6μm Particles >14μm Particles >21μm Particles >38μm		ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>1300 >160 >40 >10		50 14 1	





## **OIL ANALYSIS REPORT**

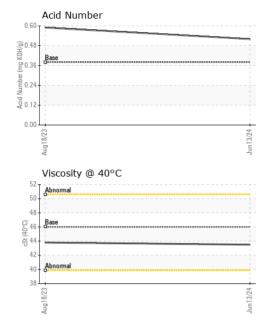

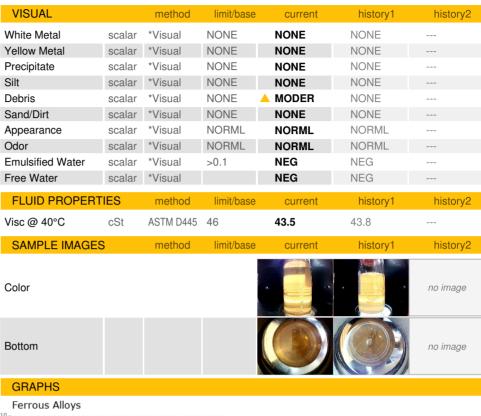





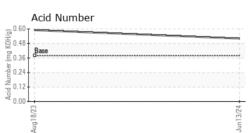





Certificate 12367

Laboratory Sample No.

Lab Number : 06218109 Unique Number : 11096306

Test Package : CONST

: WC0940747

To discuss this sample report, contact Customer Service at 1-800-237-1369.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

Received : 24 Jun 2024 **Tested** : 25 Jun 2024

Diagnosed

: 25 Jun 2024 - Don Baldridge

US 74146 Contact: BEN CALDWELL kevin.marson@wearcheck.com

5601 S 122ND E AVE

 $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

MANHATTAN ROAD AND BRIDGE

T: (918)728-5749

TULSA, OK