

### **OIL ANALYSIS REPORT**

Sample Rating Trend



Machine Id

# **NVH 7 FOAM PRESS**

Component Hydraulic System SHELL TELLUS 46 (--- GAL)

#### DIAGNOSIS

#### A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### A Wear

The copper level is abnormal. All other component wear rates are normal.

#### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		TLC0001870		
Sample Date		Client Info		20 Jun 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
CONTAMINATION	١	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	7		
Chromium	ppm	ASTM D5185m	>20	1		
Nickel	ppm	ASTM D5185m	>20	<1		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	0		
Lead	ppm	ASTM D5185m	>20	3		
Copper	ppm	ASTM D5185m	>20	3 ▲ 47		
Tin		ASTM D5185m	>20	3		
	ppm		>20			
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0.0	1		
Barium	ppm	ASTM D5185m	0	0		
Molybdenum	ppm	ASTM D5185m	0	1		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	11	69		
Calcium	ppm	ASTM D5185m	35	67		
Phosphorus	ppm	ASTM D5185m	266	325		
Zinc	ppm	ASTM D5185m	276	367		
Sulfur	ppm	ASTM D5185m	1847	917		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	2		
Sodium	ppm	ASTM D5185m		2		
Potassium	ppm	ASTM D5185m	>20	2		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<b>19144</b>		
Particles >6µm		ASTM D7647	>1300	<u> </u>		
Particles >14µm		ASTM D7647	>160	36		
Particles >21µm		ASTM D7647	>40	8		
Particles >38μm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<u> </u>		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.36	0.34		
	ing ivon/y	7.0 HW D0040	0.00	0.04		

Report Id: AUTAIK [WUSCAR] 06218148 (Generated: 06/25/2024 19:16:01) Rev: 1

Contact/Location: JEFFREY WASHICK - AUTAIK Page 1 of 2



## **OIL ANALYSIS REPORT**

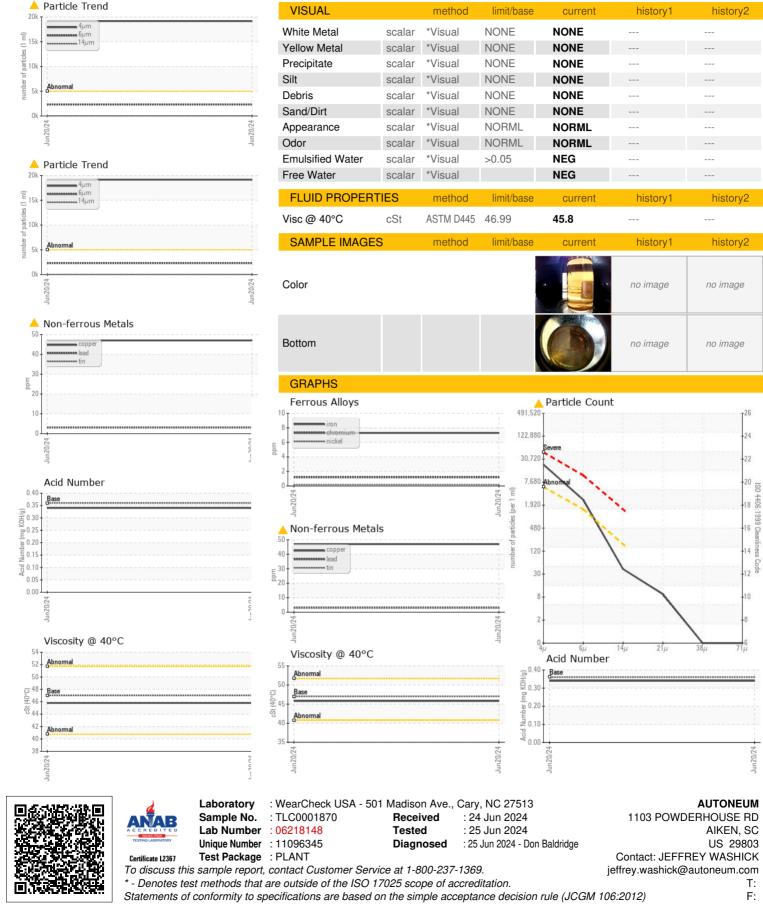

Contact/Location: JEFFREY WASHICK - AUTAIK