

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

ACL 1 CONTACT OVEN

Component Hydraulic System

SHELL TELLUS 46 (--- GAL)

DIAGNOSIS

A Recommendation

We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

🔺 Wear

The copper level is abnormal. Bearing and/or bushing wear is indicated.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.


Sample Number Sample Date	ATION	method	limit/base	current	history1	history2
		Client Info		TLC0001842		
		Client Info		20 Jun 2024		
Machine Age	hrs	Client Info		0		
	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status		-		ABNORMAL		
CONTAMINATION		method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>20	0		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		0		
	ppm	ASTM D5185m		0		
	ppm	ASTM D5185m	>20	0		
	ppm	ASTM D5185m	>20	0		
-	ppm	ASTM D5185m	>20	▲ 122		
	ppm	ASTM D5185m	>20	<1		
		ASTM D5185m	>20	< 1		
	ppm			-		
-	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0.0	1		
Barium	ppm	ASTM D5185m	0	0		
Nolybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	11	23		
Calcium	ppm	ASTM D5185m	35	33		
Phosphorus	ppm	ASTM D5185m	266	290		
	ppm	ASTM D5185m	276	342		
	ppm	ASTM D5185m	1847	915		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1		
	ppm	ASTM D5185m		2		
Sodium	nnm					
	ppm	ASTM D5185m	>20	2		
		ASTM D5185m method	>20 limit/base	2 current	 history1	 history2
Potassium						
Potassium FLUID CLEANLINE Particles >4µm		method	limit/base >5000	current	history1	history2
Potassium FLUID CLEANLINE Particles >4μm Particles >6μm		method ASTM D7647	limit/base >5000	current	history1	history2
Potassium FLUID CLEANLINE Particles >4µm Particles >6µm Particles >14µm		method ASTM D7647 ASTM D7647 ASTM D7647	limit/base >5000 >1300 >160	current ▲ 10799 ▲ 4024 ▲ 398	history1 	history2
Potassium FLUID CLEANLINE Particles >4μm Particles >6μm Particles >14μm Particles >21μm		method ASTM D7647 ASTM D7647	limit/base >5000 >1300 >160	current ▲ 10799 ▲ 4024 ▲ 398 ▲ 100	history1 	history2
Potassium FLUID CLEANLINE Particles >4μm Particles >6μm Particles >14μm Particles >21μm Particles >38μm		methodASTM D7647ASTM D7647ASTM D7647ASTM D7647ASTM D7647	limit/base >5000 >1300 >160 >40 >10	current ▲ 10799 ▲ 4024 ▲ 398 ▲ 100 5	history1	history2
Potassium FLUID CLEANLINE Particles >4μm Particles >6μm Particles >14μm Particles >21μm Particles >38μm Particles >71μm		method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	limit/base >5000 >1300 >160 >40 >10	current ▲ 10799 ▲ 4024 ▲ 398 ▲ 100	history1	history2
Potassium FLUID CLEANLINE Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm Oil Cleanliness	SS	method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ISO 4406 (c)	limit/base >5000 >1300 >160 >40 >10 >3 >3 >19/17/14	Current ▲ 10799 ▲ 4024 ▲ 398 ▲ 100 5 0 ▲ 21/19/16	history1	history2
Potassium FLUID CLEANLINE Particles >4μm Particles >6μm Particles >14μm Particles >21μm Particles >38μm Particles >71μm Oil Cleanliness FLUID DEGRADAT	SS	methodASTM D7647ASTM D7647ASTM D7647ASTM D7647ASTM D7647ASTM D7647	limit/base >5000 >1300 >160 >40 >10 >3	current ▲ 10799 ▲ 4024 ▲ 398 ▲ 100 5 0	history1	history2

Report Id: AUTAIK [WUSCAR] 06218158 (Generated: 06/25/2024 19:16:55) Rev: 1

Contact/Location: JEFFREY WASHICK - AUTAIK Page 1 of 2



OIL ANALYSIS REPORT

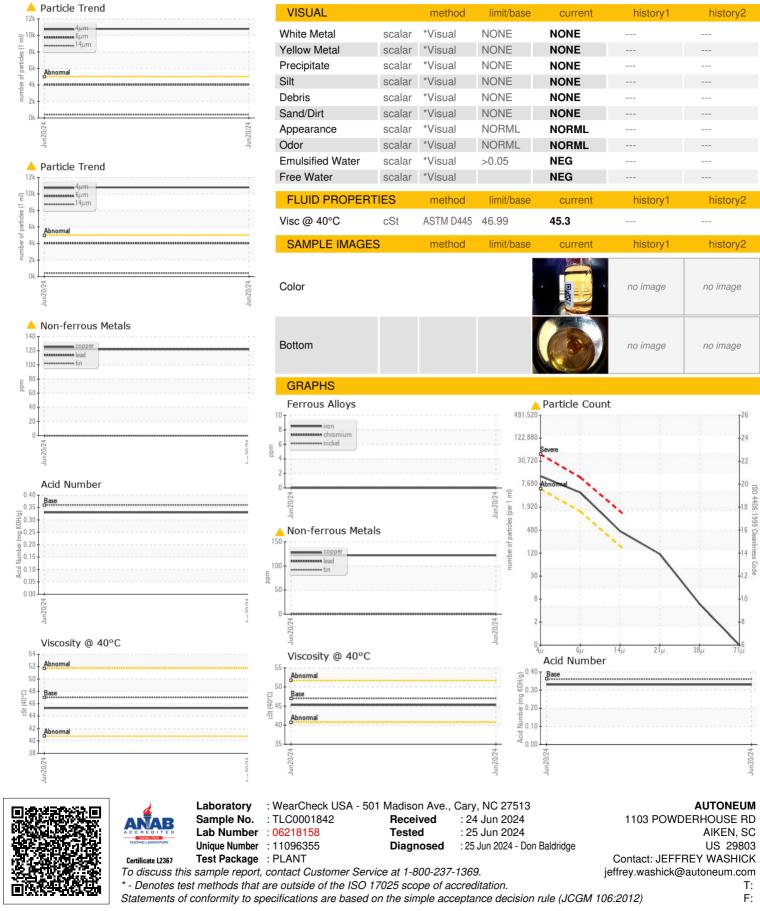

Report Id: AUTAIK [WUSCAR] 06218158 (Generated: 06/25/2024 19:16:55) Rev: 1

Contact/Location: JEFFREY WASHICK - AUTAIK