

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

Machine Id TS-0101

Component **Hydraulic System**

{not provided} (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

All component wear rates are normal.


Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PH0003222		
Sample Date		Client Info		20 Jun 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
CONTAMINATIO	V	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	<1		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	<1		
Lead	ppm	ASTM D5185m	>20	0		
Copper	ppm	ASTM D5185m	>20	<1		
Tin	ppm	ASTM D5185m	>20	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		2		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		4		
Calcium	ppm	ASTM D5185m		333		
Phosphorus	ppm	ASTM D5185m		456		
Zinc	ppm	ASTM D5185m		537		
Sulfur	ppm	ASTM D5185m		1316		
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	1		
Sodium	ppm	ASTM D5185m		3		
Potassium	ppm	ASTM D5185m	>20	2		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	▲ 58278		
Particles >6µm		ASTM D7647	>2500	<u>^</u> 20741		
Particles >14µm		ASTM D7647	>320	1788		
Particles >21µm		ASTM D7647		4 357		
Particles >38µm		ASTM D7647	>20	10		
Particles >71µm		ASTM D7647		1		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<u> 23/22/18</u>		
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2

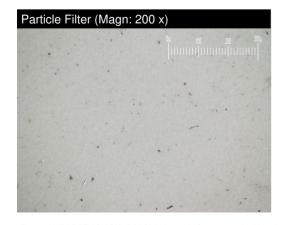


Acid Number (AN) mg KOH/g ASTM D8045

Contact/Location: J KUEHNE - PARSTMOH



OIL ANALYSIS REPORT

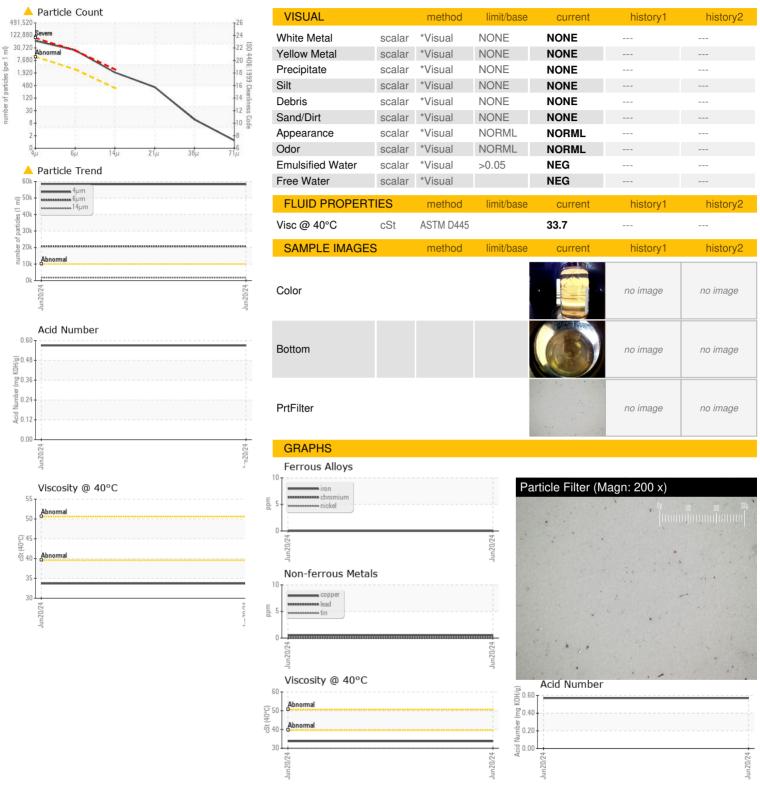





Certificate 12367

Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : PH0003222 Lab Number : 06218224

Unique Number : 11096421

Received **Tested** Diagnosed

: 24 Jun 2024 : 26 Jun 2024 : 26 Jun 2024 - Jonathan Hester

1700 E SPRING ST ST MARYS, OH US 45885 Contact: J KUEHNE jkuehne@parker.com

PARKER HANNIFIN CORPORATION

Test Package: PLANT (Additional Tests: PrtFilter) To discuss this sample report, contact Customer Service at 1-800-237-1369. st - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (419)394-7445

F: (419)394-8388