




OIL ANALYSIS REPORT

Sample Rating Trend

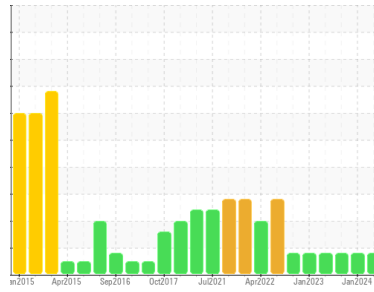

WEAR



Area
ENERGY
 Machine Id
2065PP01
 Component
Hydraulic System
 Fluid
KLUBER SUMMIT HYSYN FG 46 (40 GAL)

DIAGNOSIS

- Recommendation**
No corrective action is recommended at this time. Resample at the next service interval to monitor.
- Wear**
The copper level is abnormal. All other component wear rates are normal.
- Contamination**
The amount and size of particulates present in the system are acceptable.
- Fluid Condition**
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0773261	WC0773249	WC0761384
Sample Date	Client Info		26 Apr 2024	29 Jan 2024	25 Jul 2023
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		Not Changed	Not Changed	Not Changed
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184		26	27	18
Iron	ppm	ASTM D5185m >20	23	22	20
Chromium	ppm	ASTM D5185m >20	0	<1	0
Nickel	ppm	ASTM D5185m >20	0	0	0
Titanium	ppm	ASTM D5185m	0	0	<1
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >20	0	1	0
Lead	ppm	ASTM D5185m >20	0	0	0
Copper	ppm	ASTM D5185m >20	▲ 46	▲ 43	▲ 45
Tin	ppm	ASTM D5185m >20	<1	<1	0
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	12	10	12
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0
Manganese	ppm	ASTM D5185m	<1	0	<1
Magnesium	ppm	ASTM D5185m	4	5	7
Calcium	ppm	ASTM D5185m	512	461	516
Phosphorus	ppm	ASTM D5185m	653	569	583
Zinc	ppm	ASTM D5185m	494	452	482
Sulfur	ppm	ASTM D5185m	7238	5660	6697

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	2	3	1
Sodium	ppm	ASTM D5185m	4	2	3
Potassium	ppm	ASTM D5185m >20	2	<1	0
Water	%	ASTM D6304 >0.05	0.015	0.013	0.020
ppm Water	ppm	ASTM D6304 >500	158	134	204.5

FLUID CLEANLINESS





	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	3024	4313	882
Particles >6µm	ASTM D7647	>2500	577	895	103
Particles >14µm	ASTM D7647	>320	31	50	13
Particles >21µm	ASTM D7647	>80	6	15	6
Particles >38µm	ASTM D7647	>20	0	2	0
Particles >71µm	ASTM D7647	>4	0	0	0
Oil Cleanliness	ISO 4406 (c)	>20/18/15	19/16/12	19/17/13	17/14/11

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.558	0.47	0.53




OIL ANALYSIS REPORT

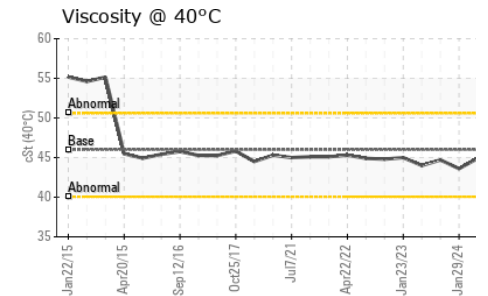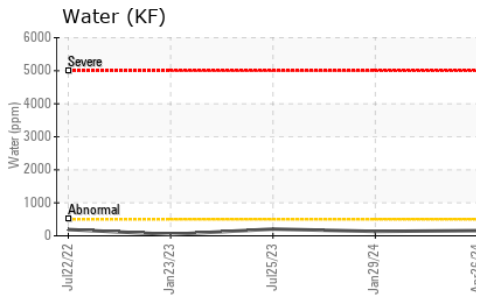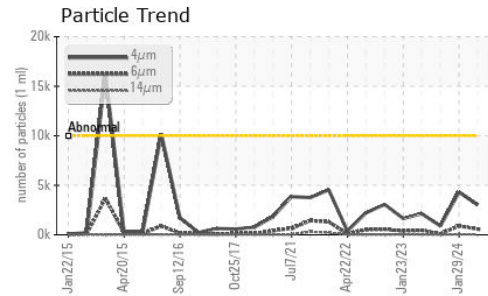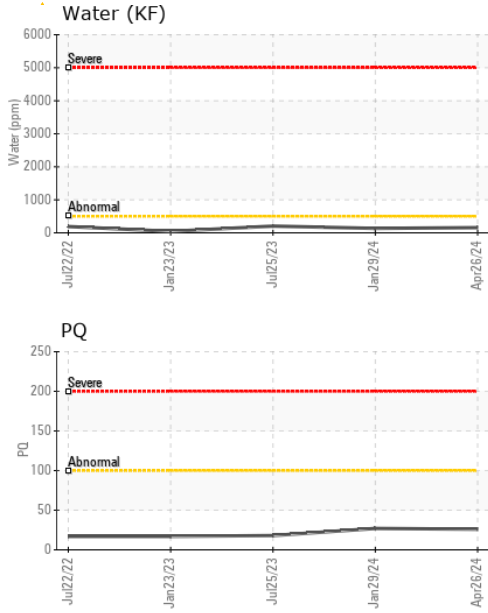






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	46	44.9	43.6	44.7

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

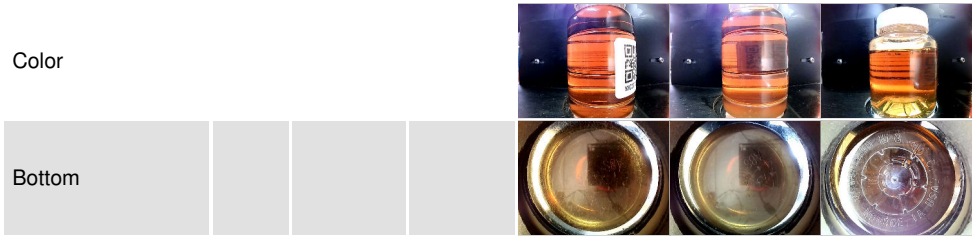

GRAPHS

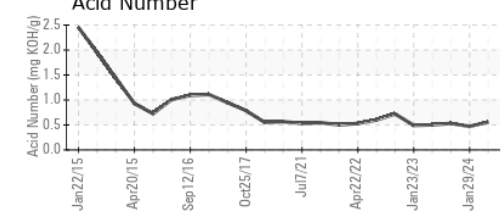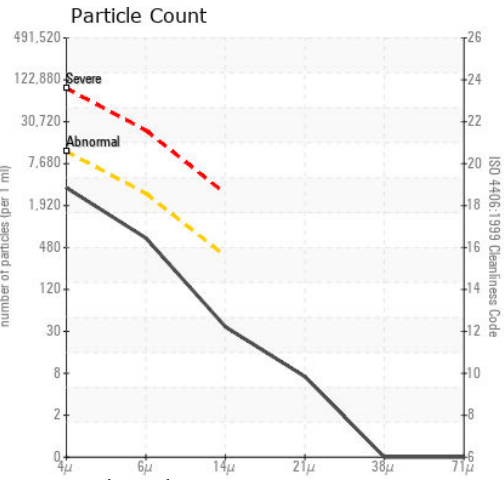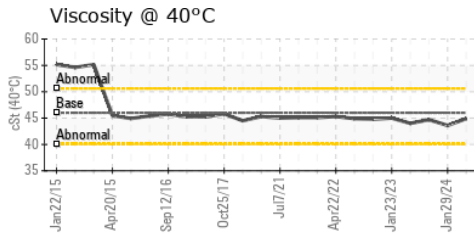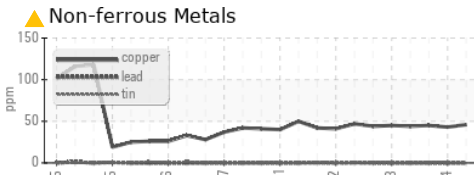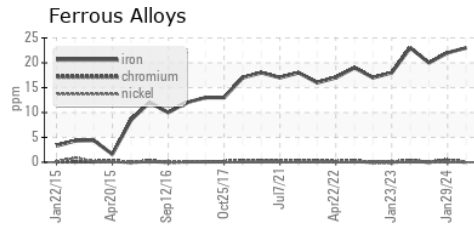

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0773261 **Received** : 24 Jun 2024
Lab Number : 06218227 **Tested** : 25 Jun 2024
Unique Number : 11096424 **Diagnosed** : 25 Jun 2024 - Don Baldrige
Test Package : IND 2 (Additional Tests: KF, PQ)

ARAUCO FLAKEBOARD - MDF
 985 CORINTH RD
 MONCURE, NC
 US
 Contact: CHRISTOPHER JACKSON
 christopher.jackson@arauco.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)