


# **OIL ANALYSIS REPORT**

Sample Rating Trend







Machine Id

C-141

**Refrigeration Compressor** 

TULCO LUBSOIL SYN RL WI 100 (--- GAL)

### Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.


## **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			0ct2020	Jun2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		TO20000336	TO2000977	
Sample Date		Client Info		12 Jun 2024	12 Oct 2020	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				NORMAL	MARGINAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	10	<1	
Chromium	ppm	ASTM D5185m	>2	0	0	
Nickel	ppm	ASTM D5185m		0	<1	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m	>2	0	<1	
Aluminum	ppm	ASTM D5185m	>3	0	0	
Lead	ppm	ASTM D5185m	>2	0	<1	
Copper	ppm	ASTM D5185m	>8	0	0	
Tin	ppm	ASTM D5185m	>4	<1	<1	
Antimony	ppm	ASTM D5185m			0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	<1	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	2	
Barium	ppm	ASTM D5185m		0	2	
Molybdenum	ppm	ASTM D5185m		0	0	
Manganese	ppm	ASTM D5185m		<1	<1	
Magnesium	ppm	ASTM D5185m		0	<1	
Calcium	ppm	ASTM D5185m		0	1	
Phosphorus	ppm	ASTM D5185m	1500	826	217	
Zinc	ppm	ASTM D5185m	1000	31	0	
Sulfur	ppm	ASTM D5185m		0	0	
		NOTHI DOTOOIII		·	O	
CONTAMINANTS					In the Landson and	
		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		6	2	history2
Sodium		ASTM D5185m ASTM D5185m	>15	6 5	2 8	
Sodium Potassium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	>15 >20	6 5 0	2 8 <1	
Sodium Potassium Water	ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304	>15 >20 >2.26	6 5 0 0.056	2 8 <1 • 0.047	
Sodium Potassium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	>15 >20	6 5 0	2 8 <1	
Sodium Potassium Water	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304	>15 >20 >2.26	6 5 0 0.056	2 8 <1 • 0.047	
Sodium Potassium Water ppm Water	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304	>15 >20 >2.26 >22600	6 5 0 0.056 568	2 8 <1 • 0.047 • 477.2	
Sodium Potassium Water ppm Water FLUID CLEANLIN	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method	>15 >20 >2.26 >22600 limit/base	6 5 0 0.056 568 current	2 8 <1 •• 0.047 •• 477.2 history1	    history2
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647	>15 >20 >2.26 >22600 limit/base >10000	6 5 0 0.056 568 current 6291	2 8 <1 ▲ 0.047 ▲ 477.2 history1	   history2
Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647	>15 >20 >2.26 >22600 limit/base >10000 >2500	6 5 0 0.056 568 current 6291 1631	2 8 <1 • 0.047 • 477.2 history1 5796 1199	   history2
Sodium Potassium Water ppm Water  FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647	>15  >20  >2.26  >22600  limit/base  >10000  >2500  >320	6 5 0 0.056 568 current 6291 1631 40	2 8 <1 \$\triangle 0.047 \$\triangle 477.2\$ history1 5796 1199 20	   history2 
Sodium Potassium Water ppm Water  FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304  method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>15 >20 >2.26 >2.2600 limit/base >10000 >2500 >320 >80 >20	6 5 0 0.056 568 current 6291 1631 40 6	2 8 <1 0.047 477.2 history1 5796 1199 20 4	history2
Sodium Potassium Water ppm Water  FLUID CLEANLIN Particles >4µm Particles >6µm Particles >21µm Particles >38µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304  method ASTM D7647	>15 >20 >2.26 >2.2600 limit/base >10000 >2500 >320 >80 >20	6 5 0 0.056 568 current 6291 1631 40 6	2 8 <1 △ 0.047 △ 477.2 history1 5796 1199 20 4 0	history2



## **OIL ANALYSIS REPORT**

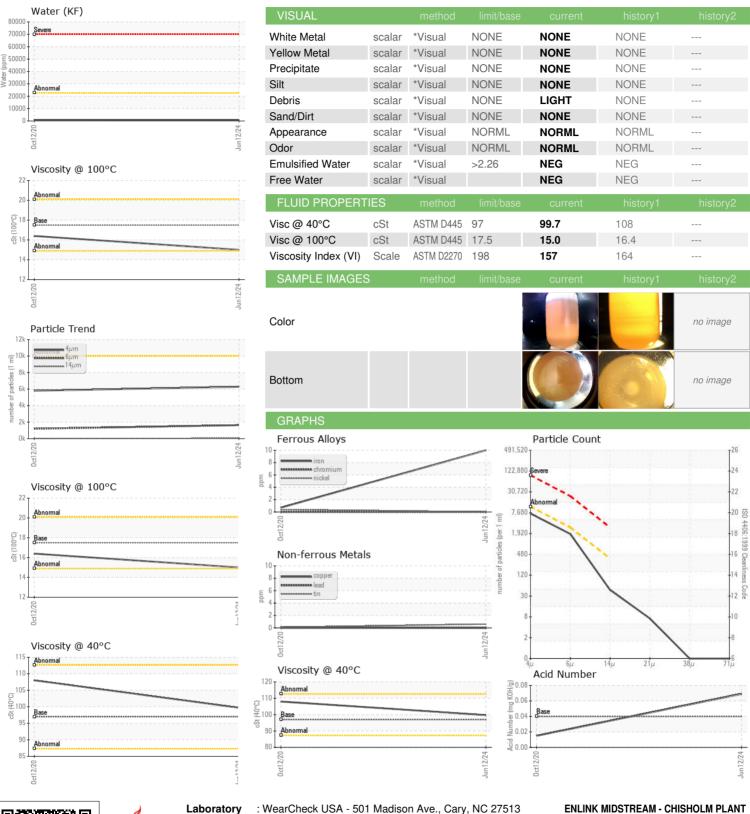





Certificate 12367

Report Id: ENLCUS [WUSCAR] 06218315 (Generated: 06/26/2024 14:22:01) Rev: 1

Laboratory Sample No. Lab Number

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : 06218315

: TO20000336 Unique Number : 11096512

 $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Received : 24 Jun 2024 **Tested** Diagnosed

: 25 Jun 2024

: 26 Jun 2024 - Don Baldridge Test Package : IND 2 ( Additional Tests: KV100, PrtCount, VI ) To discuss this sample report, contact Customer Service at 1-800-237-1369.

US 74023 Contact: TYLER FINCH tyler.finch@enlink.com T: (918)399-0359

3000 W TEXACO RD

CUSHING, OK

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: TYLER FINCH - ENLCUS