

## **OIL ANALYSIS REPORT**

Area NOT GIVEN Machine Id QUINCY CAI428914 - ABC COKE DRUMMOND Component

Component Compressor

## DIAGNOSIS

## Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

## Wear


All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

## Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



Sample Rating Trend




NORMAL

SAMPLE INFORM	<b>IATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		UCP06218368		
Sample Date		Client Info		25 Mar 2024		
Machine Age	hrs	Client Info		5900		
Oil Age	hrs	Client Info		500		
Oil Changed		Client Info		Not Changd		
Sample Status				NORMAL		
CONTAMINATION	N	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m		0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	<1		
Lead	ppm	ASTM D5185m	>25	1		
Copper	ppm	ASTM D5185m	>50	2		
Tin	ppm	ASTM D5185m	>15	<1		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		0		
Phosphorus	ppm	ASTM D5185m		816		
Zinc	ppm	ASTM D5185m		17		
Sulfur	ppm	ASTM D5185m		1396		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	2		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	3		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.34		



# **OIL ANALYSIS REPORT**

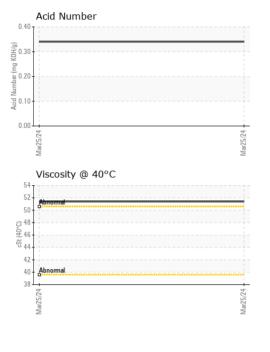

	VISUAL		method	limit/base	current	history1	history2		
	White Metal	scalar	*Visual	NONE	NONE				
	Yellow Metal	scalar	*Visual	NONE	NONE				
	Precipitate	scalar	*Visual	NONE	NONE				
	Silt	scalar	*Visual	NONE	NONE				
	Debris	scalar	*Visual	NONE	NONE				
	Sand/Dirt	scalar	*Visual	NONE	NONE				
Mar25/24	Appearance	scalar	*Visual	NORML	NORML				
M	Odor	scalar	*Visual	NORML	NORML				
	Emulsified Water	scalar	*Visual	>0.1	NEG				
1	Free Water	scalar	*Visual		NEG				
	FLUID PROPERT	IES	method	limit/base	current	history1	history2		
	Visc @ 40°C	cSt	ASTM D445		51.4				
	SAMPLE IMAGES	5	method	limit/base	current	history1	history2		
Mar25/24 +	Color				A.	no image	no image		
	Bottom					no image	no image		
	Ferrous Alloys	s		Mar25/24					
	udd copper 4 2 0 + 2 0 + 2 0 + 2 5 5 2 5 5 5 5 5 5 5 5 5 5 5 5 5			Mar25/24					
	Viscosity @ 40°C			.0 Acid Number (mg KOH(g)	Acid Number				
Laboratory Sample No. Lab Number Unique Number Toot Declored	: WearCheck USA - 50 : UCP06218368 : 06218368 : 11096565	Rece Teste	ived : 24 ed : 25	+7/52rew , NC 27513 I Jun 2024 5 Jun 2024	PATTON	ONS INC - CHARLOTTE (CORPORAT 3201 SOUTH BLV CHARLOTTE, N US 2820 Contact: STEVEN HOUSE			
ertificate L2367 Test Package o discuss this sample report, - Denotes test methods that									

Report Id: UCPATCHA [WUSCAR] 06218368 (Generated: 06/25/2024 18:19:14) Rev: 1

Contact/Location: STEVEN HOUSER - UCPATCHA