




OIL ANALYSIS REPORT



Machine Id
CATERPILLAR 745D 13395 (S/N 3T605878)
 Component
Bogie/Center Differential
 Fluid
{not provided} (--- GAL)

Sample Rating Trend

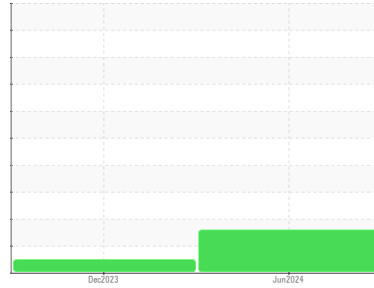

DIAGNOSIS

▲ Recommendation

The oil change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

▲ Wear

Bearing and/or bushing wear is indicated.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0899150	WC0879450	---
Sample Date	Client Info		19 Jun 2024	07 Dec 2023	---
Machine Age	hrs	Client Info	3986	2028	---
Oil Age	hrs	Client Info	1958	2028	---
Oil Changed	Client Info		Changed	Changed	---
Sample Status			ABNORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	390	190	---
Chromium	ppm	ASTM D5185m >3	2	1	---
Nickel	ppm	ASTM D5185m >3	2	<1	---
Titanium	ppm	ASTM D5185m >2	0	0	---
Silver	ppm	ASTM D5185m >2	0	0	---
Aluminum	ppm	ASTM D5185m >30	4	3	---
Lead	ppm	ASTM D5185m >13	0	0	---
Copper	ppm	ASTM D5185m >103	▲ 131	78	---
Tin	ppm	ASTM D5185m >5	▲ 5	1	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	112	<1	---
Barium	ppm	ASTM D5185m	0	0	---
Molybdenum	ppm	ASTM D5185m	0	0	---
Manganese	ppm	ASTM D5185m	4	2	---
Magnesium	ppm	ASTM D5185m	4	12	---
Calcium	ppm	ASTM D5185m	782	3093	---
Phosphorus	ppm	ASTM D5185m	547	1061	---
Zinc	ppm	ASTM D5185m	321	1255	---
Sulfur	ppm	ASTM D5185m	3852	8399	---

CONTAMINANTS



	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >100	21	30	---
Sodium	ppm	ASTM D5185m	2	<1	---
Potassium	ppm	ASTM D5185m >20	2	0	---

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual NONE	NONE	NONE	---
Precipitate	scalar	*Visual NONE	NONE	NONE	---
Silt	scalar	*Visual NONE	NONE	NONE	---
Debris	scalar	*Visual NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	---
Appearance	scalar	*Visual NORML	NORML	NORML	---
Odor	scalar	*Visual NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual >.2	NEG	NEG	---
Free Water	scalar	*Visual	NEG	NEG	---



OIL ANALYSIS REPORT

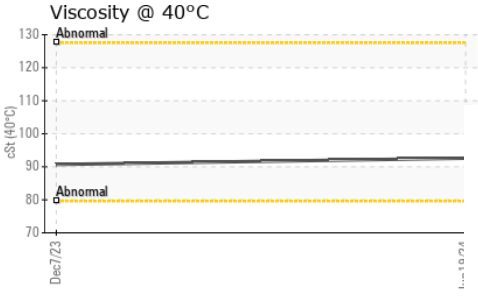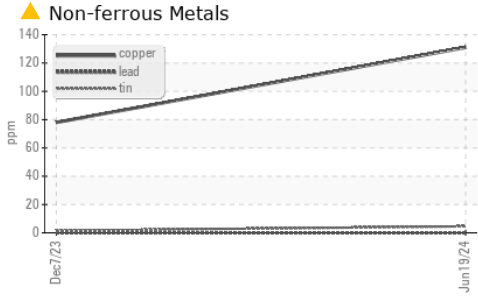




FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445	92.6	90.7	---

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

GRAPHS

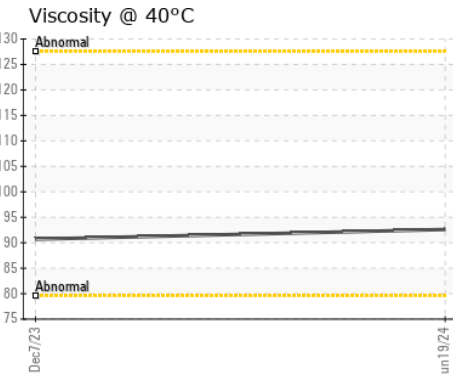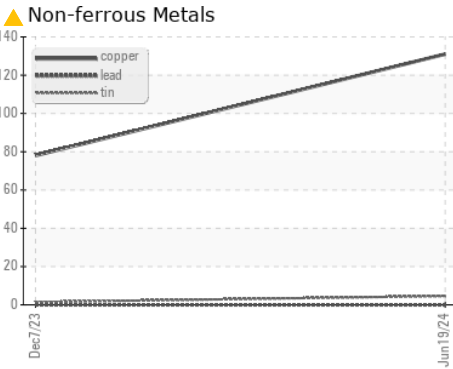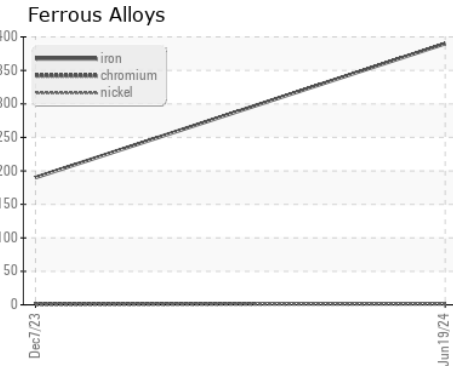

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0899150 **Received** : 24 Jun 2024
Lab Number : 06218649 **Tested** : 25 Jun 2024
Unique Number : 11096846 **Diagnosed** : 26 Jun 2024 - Sean Felton
Test Package : CONST

TRADER CONSTRUCTION CO.
 PO DRAWER 1578
 NEW BERN, NC
 US 28563
 Contact: MIKE WYATT
 mwyatt@traderconstruction.com
 T: (252)633-1399
 F: (252)638-4871

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)