


# **FUEL REPORT**

Area **EAVIRT 275 HARTZ MT2** 

**Diesel Fuel** 

No.2 DIESEL FUEL (ULTRALOW SULPHUR) (--- QTS)

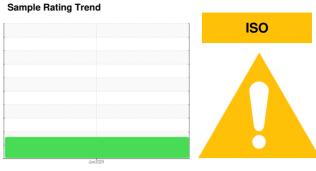

# **DIAGNOSIS**

### Recommendation

We advise that you filter this fluid before use. All laboratory tests indicate that this sample meets specifications for No.2 low-sulfur diesel fuel.

#### Corrosion

All metal levels are normal indicating no corrosion in the system.

# Contaminants

There is a high amount of particulates present in the fuel. The water content is negligible. There is no bacteria or fungus (yeast and/or mold) indicated in the sample.


## **Fuel Condition**

Sulfur value derived by ASTM D5453 method for ULSD validation.

4) ( Q15)				Jun2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC06218694		
Sample Date		Client Info		23 Jun 2024		
Machine Age	hrs	Client Info		0		
Sample Status				ABNORMAL		
PHYSICAL PROP	ERTIES	method	limit/base	current	history1	history2
Fuel Color	text	*Visual Screen	Yllow	Red		
ASTM Color	scalar	*ASTM D1500		L4.0		
Visc @ 40°C	cSt	ASTM D445	3.0	2.37		
Pensky-Martens Flash Point	°C	*PMCC Calculated	52	58.5		
SULFUR CONTE	NT	method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185m	10	7		
Sulfur (UVF)	ppm	ASTM D5453	. •	17		
DISTILLATION		method	limit/base	current	history1	history2
	°C	ASTM D86	165	169		
Initial Boiling Point 5% Distillation Point	°C	ASTM D86	100	193		
10% Distill Point	°C	ASTM D86	201	204		
15% Distillation Point	°C	ASTM D86	201	212		
20% Distill Point	°C	ASTM D86	216	220		
30% Distill Point	°C	ASTM D86	230	235		
40% Distill Point	°C	ASTM D86	243	249		
50% Distill Point	°C	ASTM D86	255	262		
60% Distill Point	°C	ASTM D86	267	276		
70% Distill Point	°C	ASTM D86	280	289		
80% Distill Point	°C	ASTM D86	295	304		
85% Distillation Point	°C	ASTM D86	200	314		
90% Distill Point	°C	ASTM D86	310	324		
95% Distillation Point	°C	ASTM D86	0.10	341		
Final Boiling Point	°C	ASTM D86	341	355		
IGNITION QUALIT	ΓΥ	method	limit/base	current	history1	history2
API Gravity		ASTM D7777	37.7	36		
Cetane Index		ASTM D4737	<40.0	48		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	<1.0	<1		
Sodium	ppm	ASTM D5185m	< 0.1	1		
Potassium	ppm	ASTM D5185m	<0.1	<1		
Water	%	ASTM D6304	< 0.05	0.008		
ppm Water	ppm	ASTM D6304	<500	88		
% Gasoline	%	*In-House	< 0.50	0.0		
% Biodiesel	%	*In-House	<20.0	1.5		



# **FUEL REPORT**

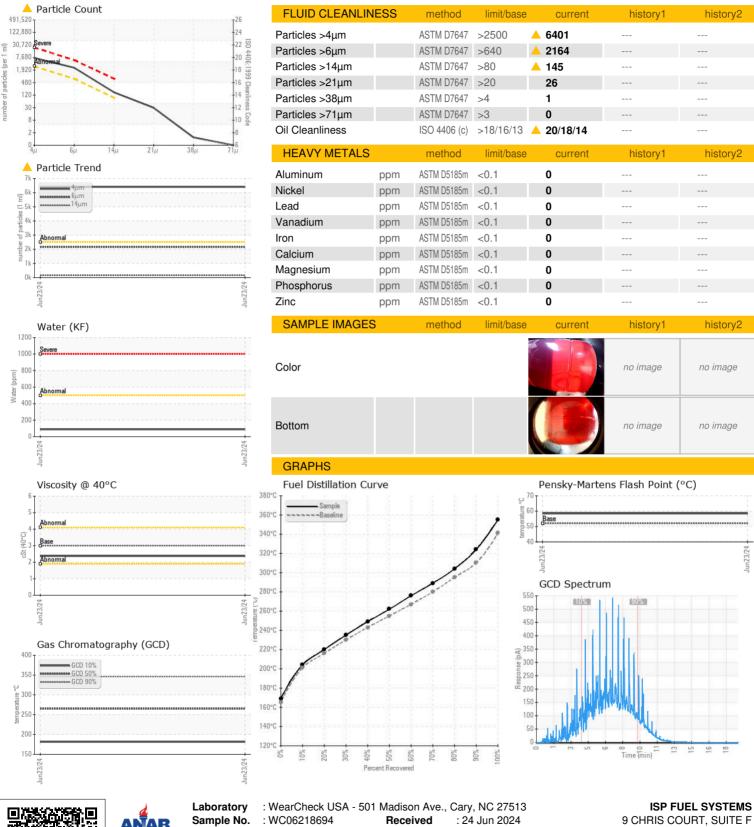



Certificate 12367

Sample No. Lab Number

: WC06218694 : 06218694

Unique Number : 11096891 Test Package : DF-2 (Additional Tests: Fuel, Screen)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

**Tested** Diagnosed

: 26 Jun 2024

: 26 Jun 2024 - Elizabeth Valachovic

US 08810 Contact: AJ THOMPSON aj@ispfuelsystems.com

 $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: ISPDAY [WUSCAR] 06218694 (Generated: 06/27/2024 08:05:05) Rev: 1

Contact/Location: AJ THOMPSON - ISPDAY

T:

F:

DAYTON, NJ